



### NPN Silicon Bias Resistor Transistor

 Lead(Pb)-Free



SOT-323(SC-70)

### Maximum Ratings (T<sub>A</sub>=25 °C unless otherwise noted)

| Rating                       | Symbol           | Value | Unit |
|------------------------------|------------------|-------|------|
| Collector-Emitter Voltage    | V <sub>CEO</sub> | 50    | Vdc  |
| Collector-Base Voltage       | V <sub>CBO</sub> | 50    | Vdc  |
| Collector Current-Continuous | I <sub>C</sub>   | 100   | mAdc |

### Thermal Characteristics

| Characteristics   | Symbol                           | Max         | Unit         |
|---|----------------------------------|-------------|--------------|
| Total Device Dissipation FR-5 Board<br>(1)T <sub>A</sub> =25 °C<br>Derate above 25 °C | P <sub>D</sub>                   | 202<br>1.6  | mW<br>mW/ °C |
| Thermal Resistance, Junction to Ambient (1)   | R <sub>θJA</sub>                 | 618         | °C/W         |
| Junction and Storage, Temperature Range   | T <sub>J</sub> ,T <sub>stg</sub> | -55 to +150 | °C           |

1.FR-4 @ minimum pad

2.FR-4 @ 1.0×1.0 inch Pad

### Device Marking and Resistor Values

| Device  | Marking | R1(K) | R2(K) | Device  | Marking | R1(K) | R2(K) |
|---------|---------|-------|-------|---------|---------|-------|-------|
| MUN5211 | 8A      | 10    | 10    | MUN5231 | 8H      | 2.2   | 2.2   |
| MUN5212 | 8B      | 22    | 22    | MUN5232 | 8J      | 4.7   | 4.7   |
| MUN5213 | 8C      | 47    | 47    | MUN5233 | 8K      | 4.7   | 47    |
| MUN5214 | 8D      | 10    | 47    | MUN5234 | 8L      | 22    | 47    |
| MUN5215 | 8E      | 10    | ∞     | MUN5235 | 8M      | 2.2   | 47    |
| MUN5216 | 8F      | 4.7   | ∞     | MUN5236 | 8N      | 100   | 100   |
| MUN5230 | 8G      | 1.0   | 1.0   | MUN5237 | 8P      | 47    | 22    |

## Electrical Characteristics (TA=25°C Unless Otherwise noted)

| Characteristics | Symbol | Min | Typ | Max | Unit |
|-----------------|--------|-----|-----|-----|------|
|-----------------|--------|-----|-----|-----|------|

## Off Characteristics

|   |          |    |      |      |    |
|---|----------|----|------|------|----|
| Collector-Emitter Breakdown Voltage<br>( $I_C=2.0\text{mA}$ , $I_B=0$ ) | V(BR)CEO | 50 | -    | -    | V  |
| Collector-Base Breakdown Voltage<br>( $I_C=10\text{ uA}$ , $I_E=0$ )    | V(BR)CBO | 50 | -    | -    | V  |
| Collector-Base Cutoff Voltage<br>( $V_{CB}=50\text{ V}$ , $I_E=0$ )     | ICBO     | -  | -    | 100  | nA |
| Collector-Emitter Cutoff Current<br>( $I_{CE}=50\text{V}$ , $I_B=0$ )   | ICEO     | -  | -    | 500  | nA |
| Emitter-Base Cutoff Current<br>( $V_{EB}=6.0\text{V}$ , $I_C=0$ )       | MUN5211  | -  | -    | 0.5  | mA |
|   | MUN5212  | -  | -    | 0.2  |    |
|   | MUN5213  | -  | -    | 0.1  |    |
|   | MUN5214  | -  | -    | 0.2  |    |
|   | MUN5215  | -  | -    | 0.9  |    |
|   | MUN5216  | -  | -    | 1.9  |    |
|   | MUN5230  | -  | -    | 4.3  |    |
|   | MUN5231  | -  | -    | 2.3  |    |
|   | MUN5232  | -  | -    | 1.5  |    |
|   | MUN5233  | -  | -    | 0.18 |    |
|   | MUN5234  | -  | -    | 0.13 |    |
|   | MUN5235  | -  | -    | 0.2  |    |
|   | MUN5236  | -  | -    | 0.05 |    |
| MUN5237   | -        | -  | 0.13 |      |    |

## Electrical Characteristics (TA=25°C Unless Otherwise noted)

| Characteristics   | Symbol  | Min      | Typ | Max | Unit |     |
|---|---|----------|-----|-----|------|-----|
| <b>On Characteristics (3)</b>   |   |          |     |     |      |     |
| DC Current Gain<br>(VCE=10V, IC=5.0mA)  | MUN5211   | 35       | 60  | -   |      |     |
|   | MUN5212   | 60       | 100 | -   |      |     |
|   | MUN5213   | 80       | 140 | -   |      |     |
|   | MUN5214   | 80       | 140 | -   |      |     |
|   | MUN5215   | 160      | 350 | -   |      |     |
|   | MUN5216   | 160      | 350 | -   |      |     |
|   | MUN5230   | 3.0      | 5.0 | -   |      |     |
|   | MUN5231   | 8.0      | 15  | -   |      |     |
|   | MUN5232   | 15       | 30  | -   |      |     |
|   | MUN5233   | 80       | 200 | -   |      |     |
|   | MUN5234   | 80       | 150 | -   |      |     |
|   | MUN5235   | 80       | 140 | -   |      |     |
|   | MUN5236   | 80       | 150 | -   |      |     |
|   | MUN5237   | 80       | 140 | -   |      |     |
| Collector-Emitter Saturation Voltage<br>(IC=10mA, IB=0.3mA)<br>(IC=10mA, IB=5mA)<br>(IC=10mA, IB=1mA)                     | MUN5230/MUN5231<br>MUN5215/MUN5216<br>MUN5232/MUN5233/MUN5234   | VCE(sat) | -   | -   | 0.25 | Vdc |
| Output Voltage(on)<br>(VCC=5.0V, VB=2.5V, RL=1.0kΩ)   | MUN5211<br>MUN5212<br>MUN5214<br>MUN5215<br>MUN5216<br>MUN5230<br>MUN5231<br>MUN5232<br>MUN5233<br>MUN5234<br>MUN5235 | VOL      | -   | -   | 0.2  | Vdc |
| (VCC=5.0V, VB=3.5V, RL=1.0kΩ)   | MUN5213   | -        | -   | -   | 0.2  |     |
| (VCC=5.0V, VB=5.5V, RL=1.0kΩ)   | MUN5236   | -        | -   | -   | 0.2  |     |
| (VCC=5.0V, VB=4.0V, RL=1.0kΩ)   | MUN5237   | -        | -   | -   | 0.2  |     |
| Output Voltage(off)<br>(VCC=5.0V, VB=0.5V, RL=1.0kΩ)<br>(VCC=5.0V, VB=0.050V, RL=1.0kΩ)<br>(VCC=5.0V, VB=0.25V, RL=1.0kΩ) | MUN5230<br>MUN5215/MUN5216/MUN5233  | VOH      | 4.9 | -   | -    | Vdc |

3. Pulse Test: Pulse Width < 300 us, Duty Cycle < 2.0%

## Electrical Characteristics (TA=25°C Unless Otherwise noted)

| Characteristics | Symbol | Min | Typ | Max | Unit |
|-----------------|--------|-----|-----|-----|------|
|-----------------|--------|-----|-----|-----|------|

### On Characteristics

|                                |                         |       |       |       |       |    |
|--------------------------------|-------------------------|-------|-------|-------|-------|----|
| Input Resistor                 | MUN5211                 | R1    | 7.0   | 10    | 13    | kΩ |
|                                | MUN5212                 |       | 15.4  | 22    | 28.6  |    |
|                                | MUN5213                 |       | 32.9  | 47    | 61.1  |    |
|                                | MUN5214                 |       | 7.0   | 10    | 13    |    |
|                                | MUN5215                 |       | 7.0   | 10    | 13    |    |
|                                | MUN5216                 |       | 3.3   | 4.7   | 6.1   |    |
|                                | MUN5230                 |       | 0.7   | 1.0   | 1.3   |    |
|                                | MUN5231                 |       | 1.5   | 2.2   | 2.9   |    |
|                                | MUN5232                 |       | 3.3   | 4.7   | 6.1   |    |
|                                | MUN5233                 |       | 3.3   | 4.7   | 6.1   |    |
|                                | MUN5234                 |       | 15.4  | 22    | 28.6  |    |
|                                | MUN5235                 |       | 1.54  | 2.2   | 2.86  |    |
|                                | MUN5236                 |       | 70    | 100   | 130   |    |
|                                | MUN5237                 |       | 32.9  | 47    | 61.1  |    |
| Resistor Ratio MUN5211/MUN5212 | MUN5213/MUN5236         | R1/R2 | 0.8   | 1.0   | 1.2   |    |
|                                | MUN5214                 |       | 0.17  | 0.21  | 0.25  |    |
|                                | MUN5215/MUN5216         |       | -     | -     | -     |    |
|                                | MUN5230/MUN5231/MUN5232 |       | 0.8   | 1.0   | 1.2   |    |
|                                | MUN5233                 |       | 0.055 | 0.1   | 0.185 |    |
|                                | MUN5234                 |       | 0.38  | 0.47  | 0.56  |    |
|                                | MUN5235                 |       | 0.038 | 0.047 | 0.056 |    |
|                                | MUN5237                 |       | 1.7   | 2.1   | 2.6   |    |

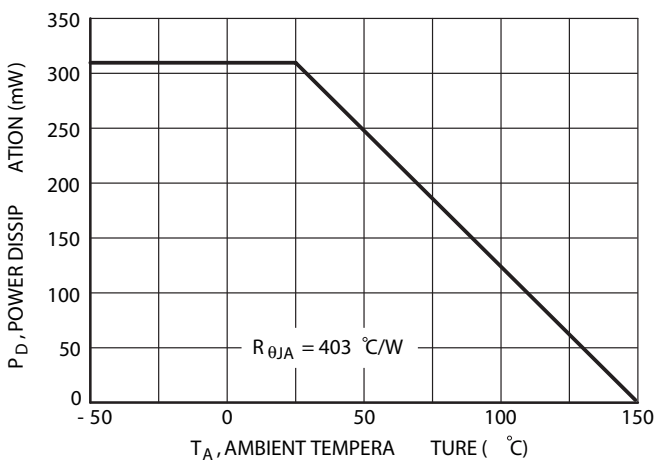


FIG 1. Derating Curve



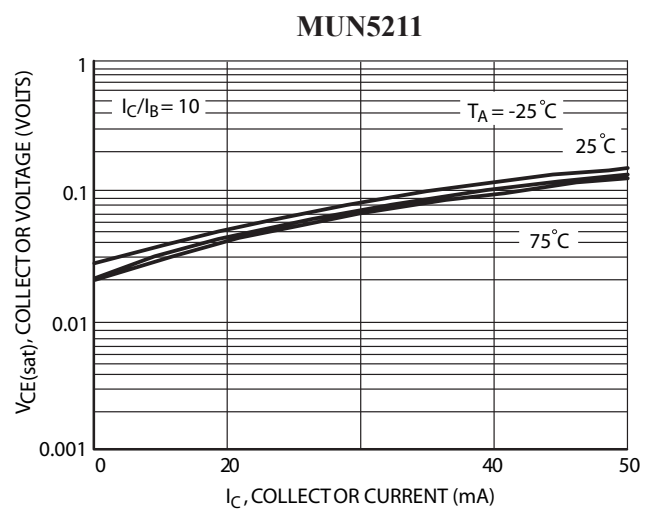



FIG 2 V<sub>CE(sat)</sub> versus I<sub>C</sub>

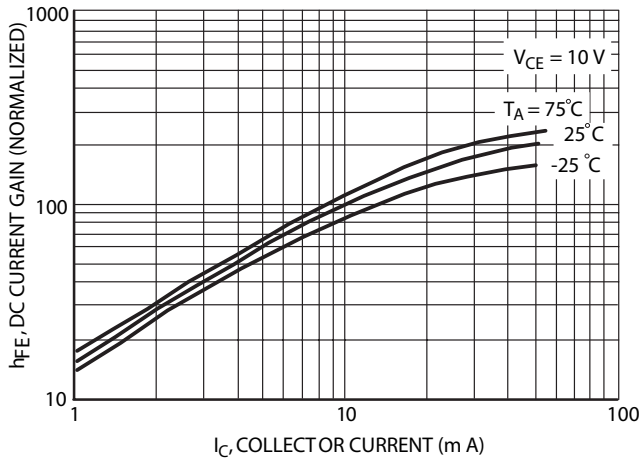


**FIG.3 DC Current Gain**

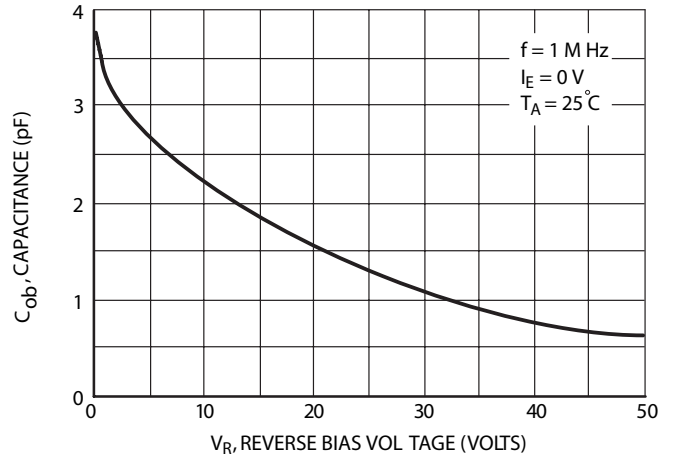

**FIG.4 Output Capacitance**

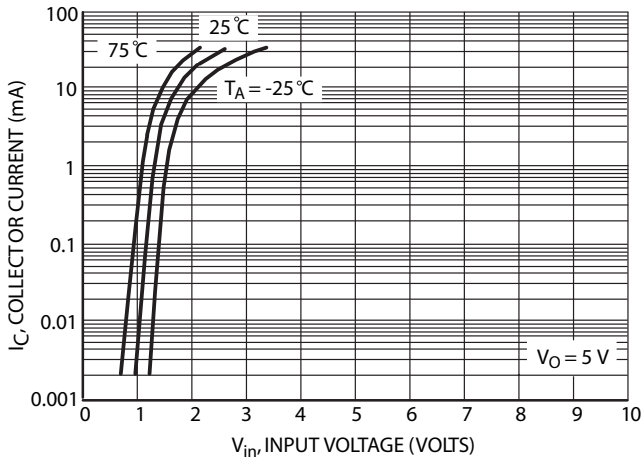


**FIG.5 Output Current versus Input Voltage**

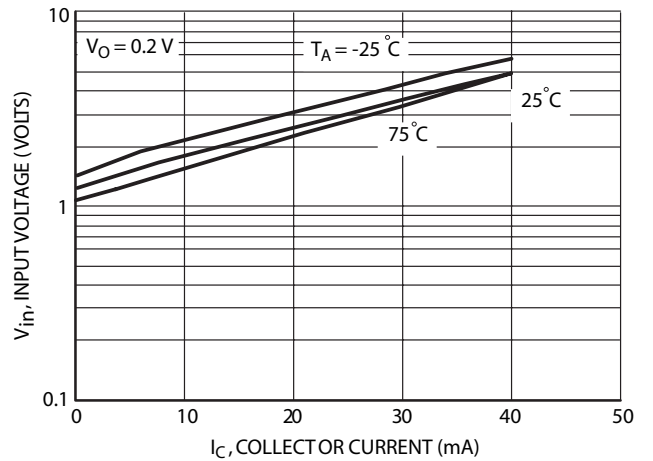


**FIG.6 Input Voltage versus Output Current**

## MUN5212

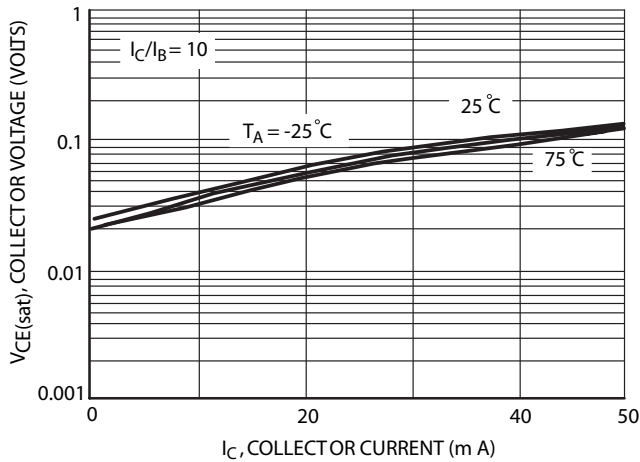

**FIG.7 VCE(sat) versus IC**

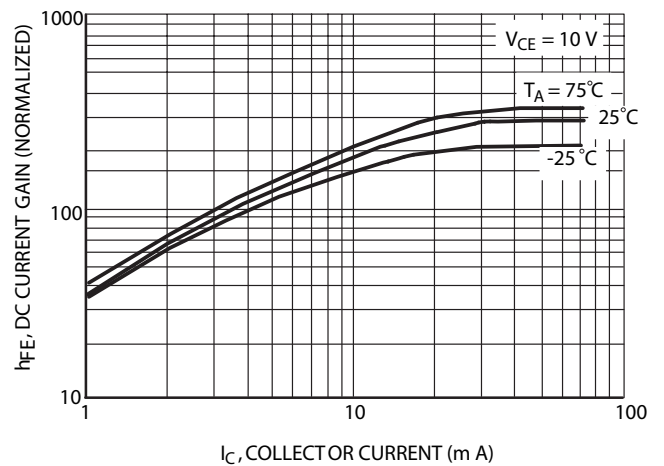

**FIG.8 DC Current Gain**

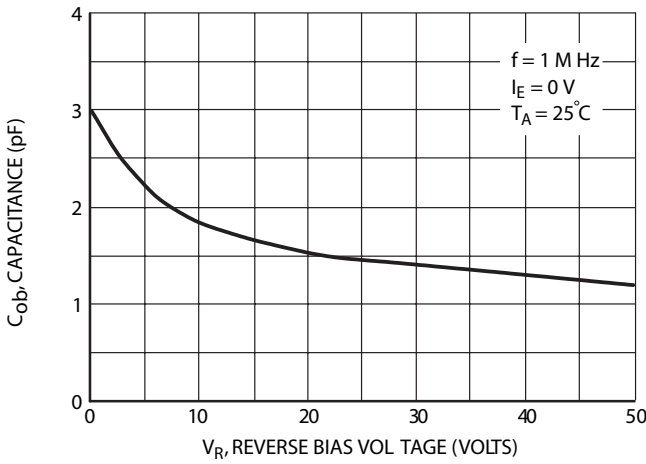


FIG.9 Output Capacitance

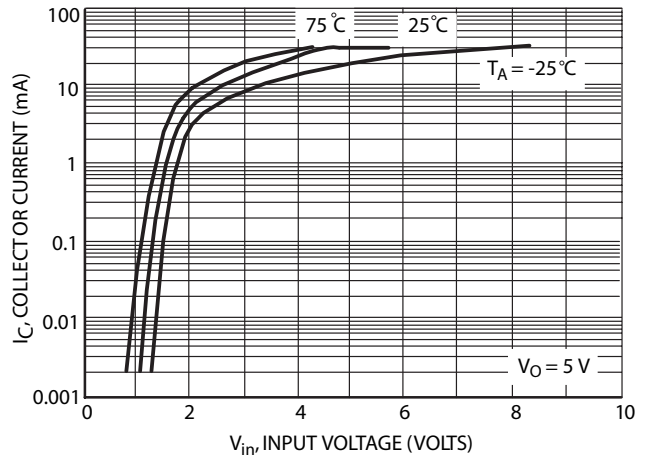


FIG.10 Output Current versus Input Voltage

MUN5213

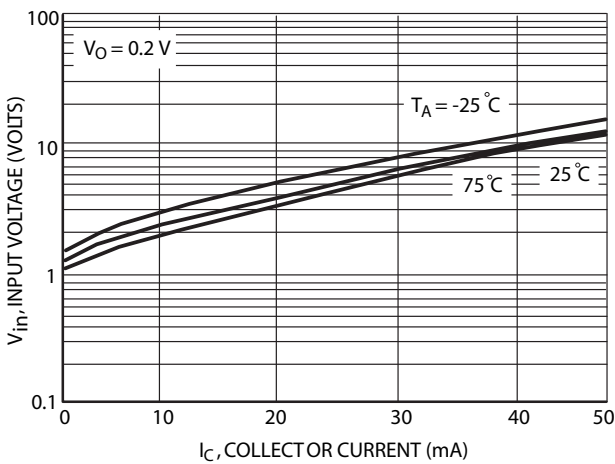


FIG.11 Input Voltage versus Output Current

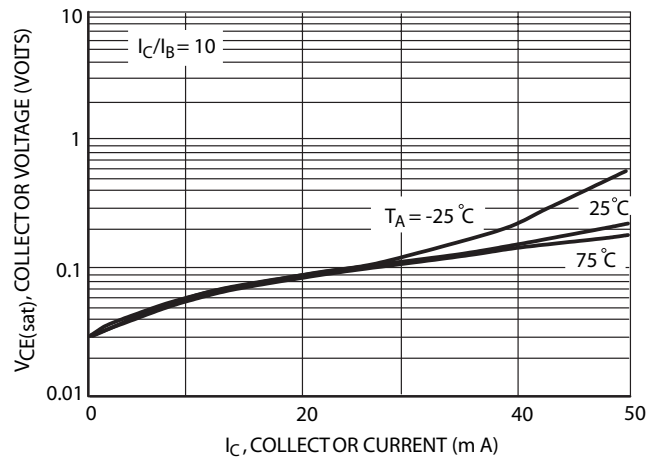


FIG.12  $V_{CE(sat)}$  versus  $I_C$

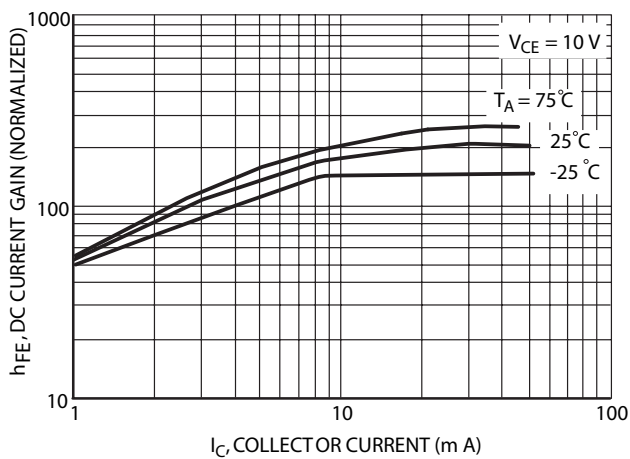


FIG.13 DC Current Gain



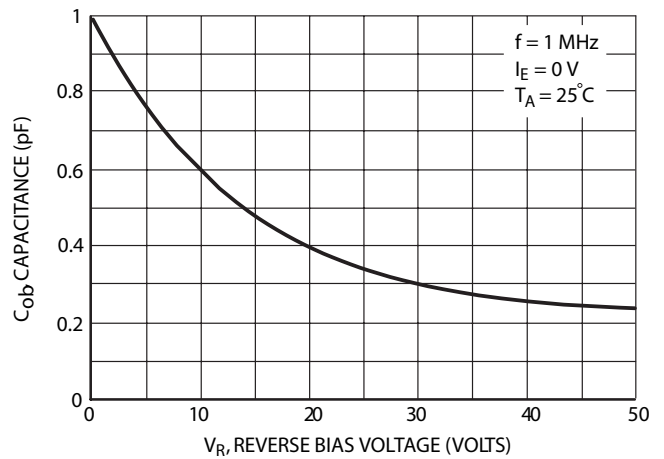


FIG.14 Output Capacitance

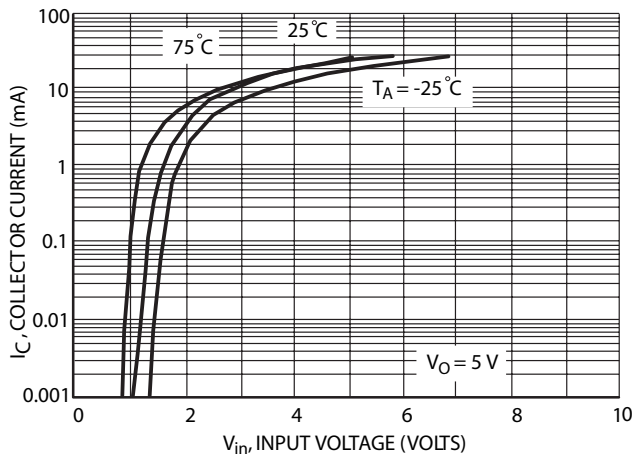


**FIG.15 Output Current versus Input Voltage**

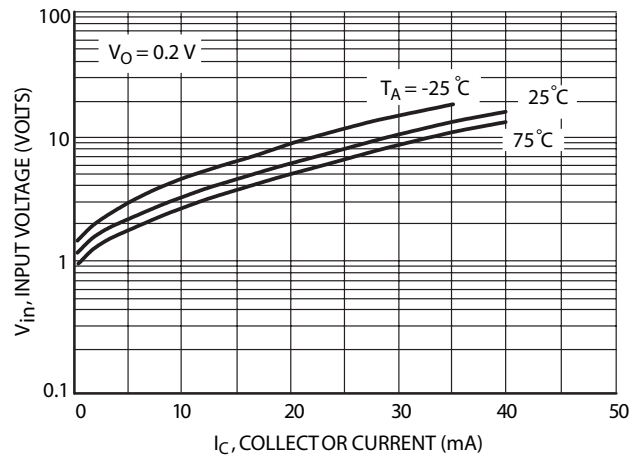


**FIG.16 Input Voltage versus Output Current**


## MUN5214

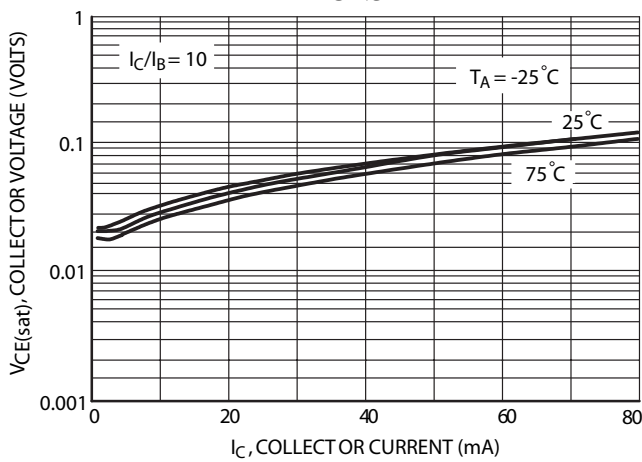


**FIG.17  $V_{CE(sat)}$  versus  $I_C$**

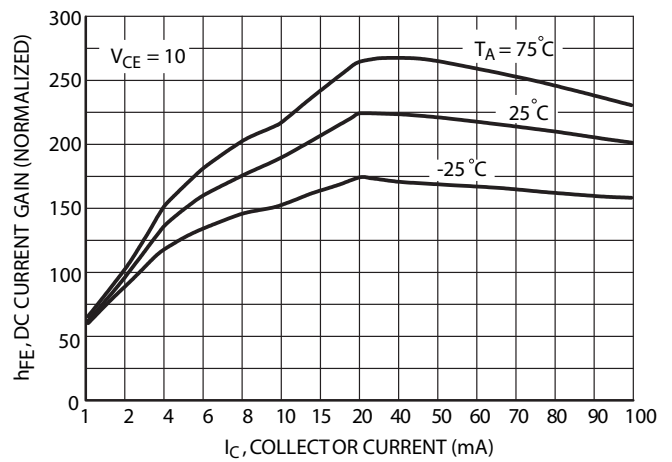

**FIG.18 DC Current Gain**

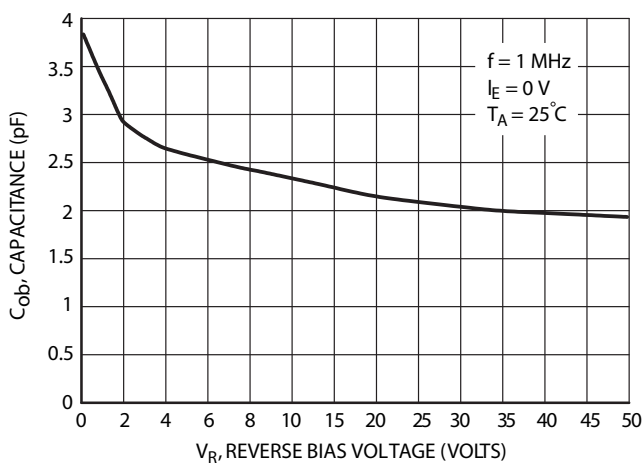

**FIG.19 Output Capacitance**

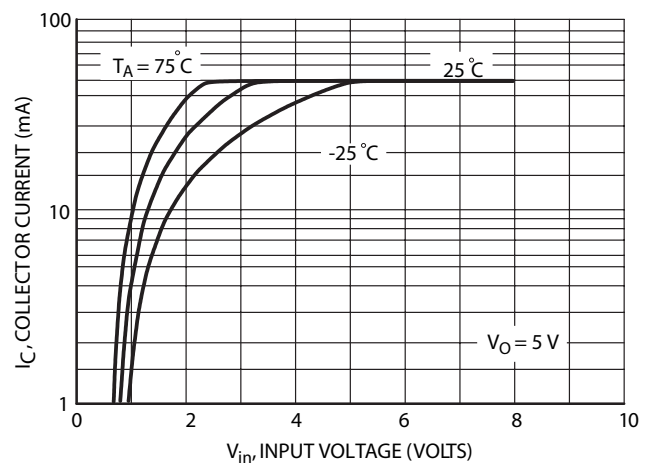

**FIG.20 Output Current versus Input Voltage**


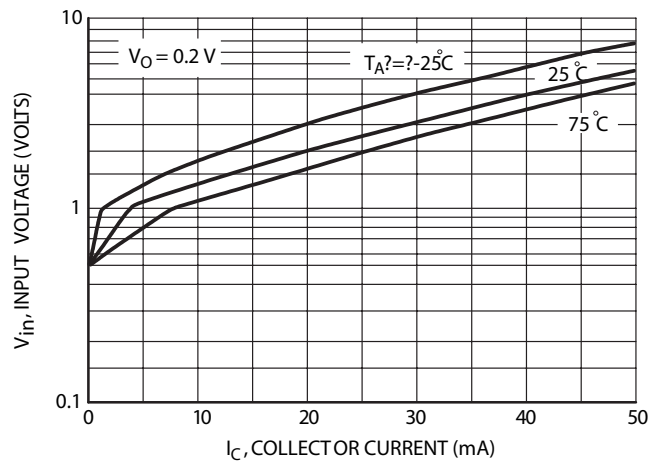


FIG.21 Input Voltage versus Output Current



SOT-323 Outline Demensions

Unit:mm

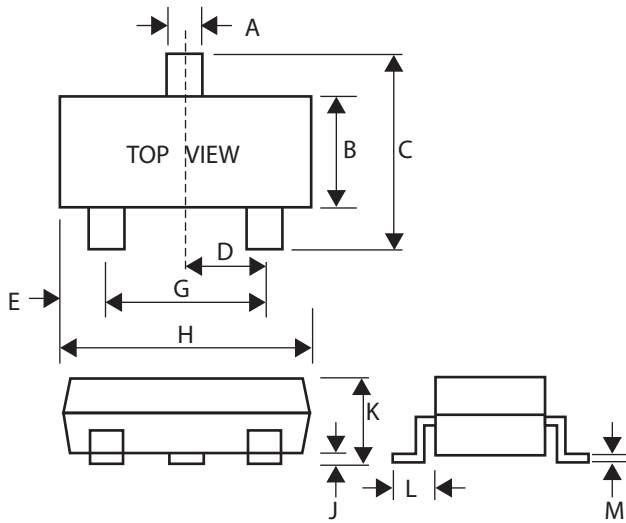

| SOT-323 |      |      |
|---------|------|------|
| Dim     | Min  | Max  |
| A       | 0.30 | 0.40 |
| B       | 1.15 | 1.35 |
| C       | 2.00 | 2.40 |
| D       | -    | 0.65 |
| E       | 0.30 | 0.40 |
| G       | 1.20 | 1.40 |
| H       | 1.80 | 2.20 |
| J       | 0.00 | 0.10 |
| K       | 0.80 | 1.00 |
| L       | 0.42 | 0.53 |
| M       | 0.10 | 0.25 |