

Silicon PNP Power Transistors

2SA1304

DESCRIPTION


- With TO-220Fa package
- Complement to type 2SC3296
- High breakdown voltage

APPLICATIONS

- Power amplifier applications
- Vertical output applicatios

PINNING

PIN	DESCRIPTION
1	Emitter
2	Collector
3	Base

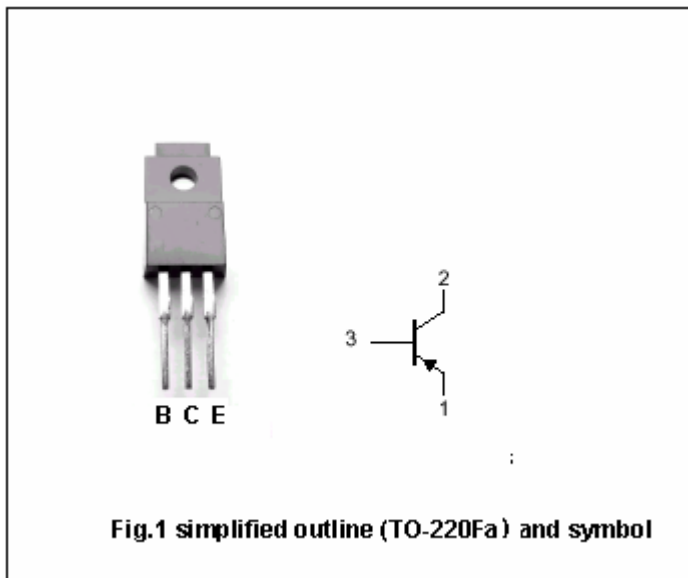

Absolute maximum ratings(Tc=25□)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-150	V
V_{CEO}	Collector-emitter voltage	Open base	-150	
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-1.5	A
I_B	Base current		-0.5	A
P_C	Collector power dissipation	$T_C=25□$	20	W
		$T_a=25□$	2	
T_j	Junction temperature		150	□
T_{stg}	Storage temperature		-55~150	□

Silicon PNP Power Transistors

2SA1304

CHARACTERISTICS


T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-10mA, I _B =0	-150			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-500mA; I _B =-50mA			-1.5	V
V _{BE}	Base-emitter on voltage	I _C =-500mA; V _{CE} =-10V			-0.85	V
I _{CBO}	Collector cut-off current	V _{CB} =-120V; I _E =0			-10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-5V; I _C =0			-10	μA
h _{FE}	DC current gain	I _C =-500mA; V _{CE} =-10V	40		140	
C _{ob}	Output capacitance	I _E =0; V _{CB} =-10V, f=1MHz		55		pF
f _T	Transition frequency	I _C =-500mA; V _{CE} =-10V		4		MHz

Silicon PNP Power Transistors

2SA1304

PACKAGE OUTLINE

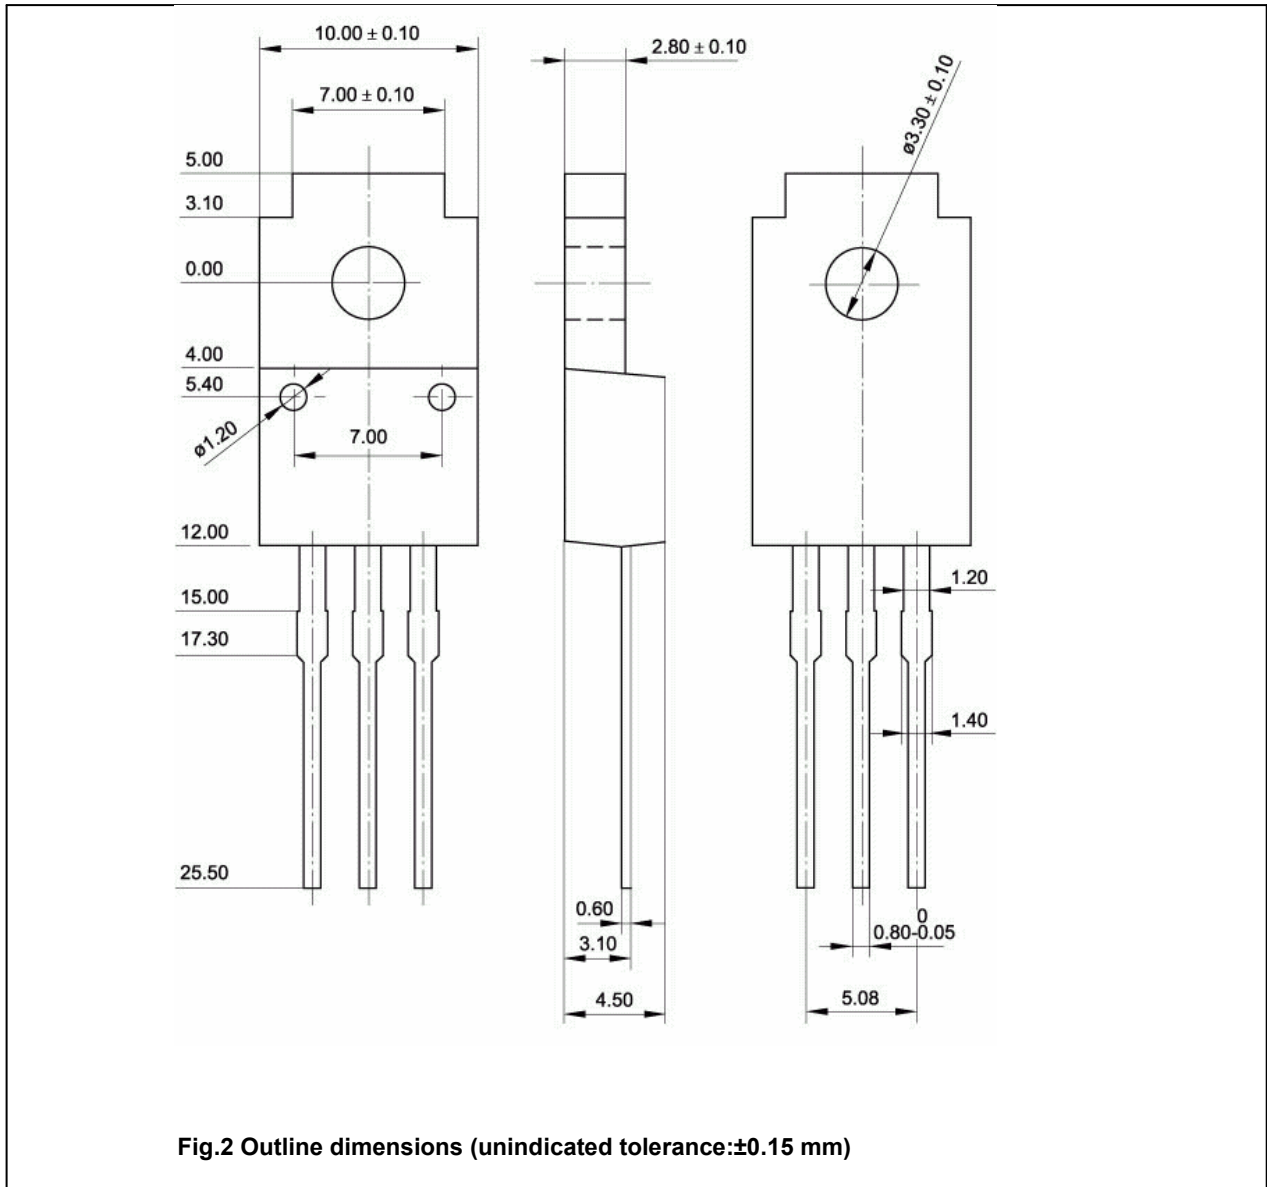

Silicon PNP Power Transistors

2SA1304

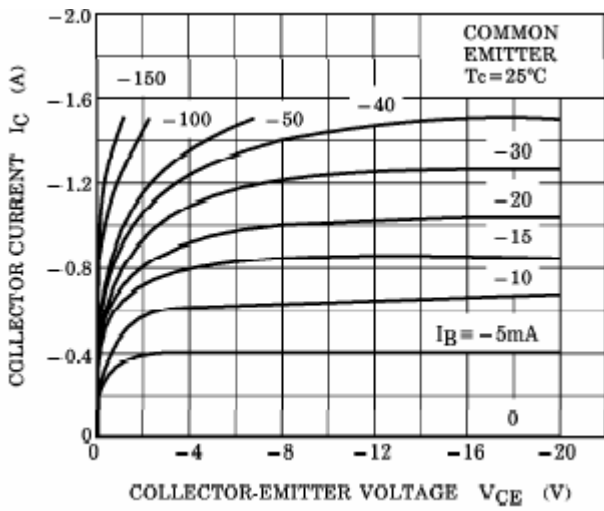


Fig.3 Static Characteristic

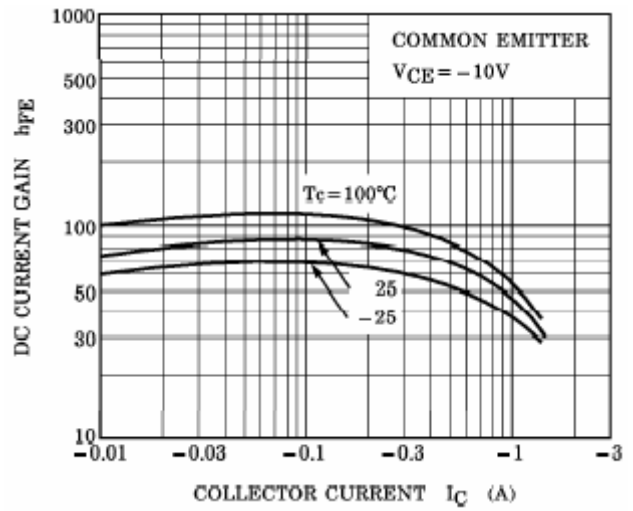


Fig.4 DC current Gain

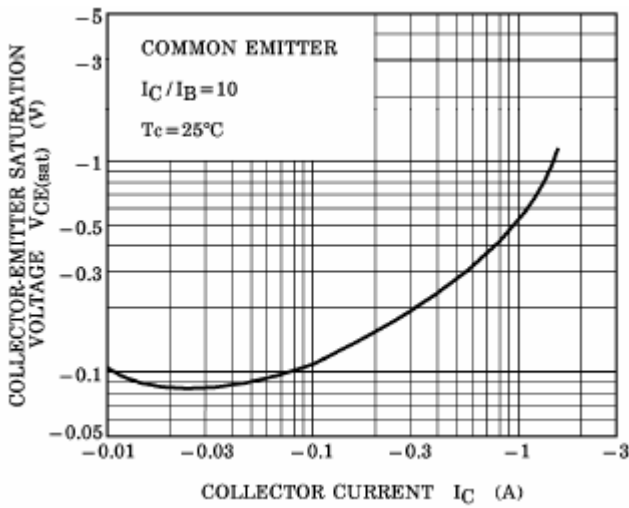


Fig.5 Collector-Emitter Saturation Voltage

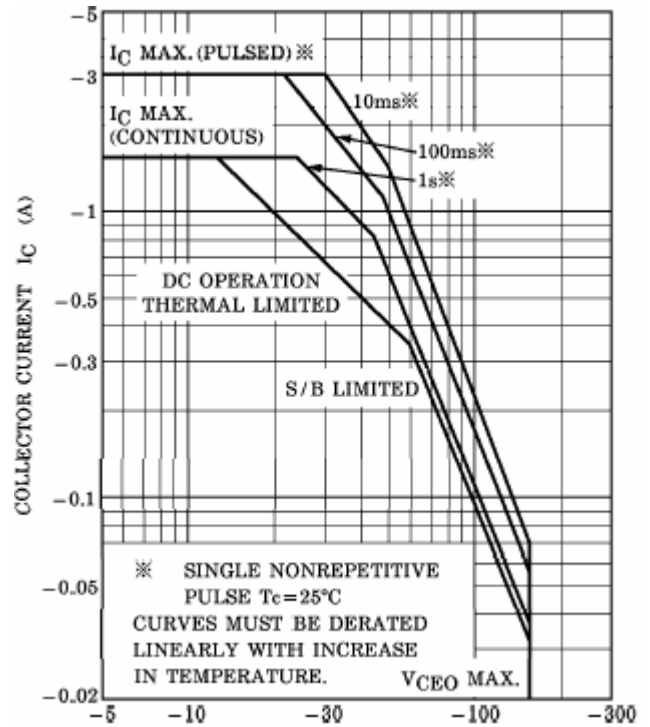


Fig.6 Safe Operating Area