

Silicon PNP Power Transistors


2SB1569

DESCRIPTION

- With TO-220F package
- High DC current gain
- Low collector saturation voltage
- Wide area of safe operation
- Complement to type 2SD2400

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

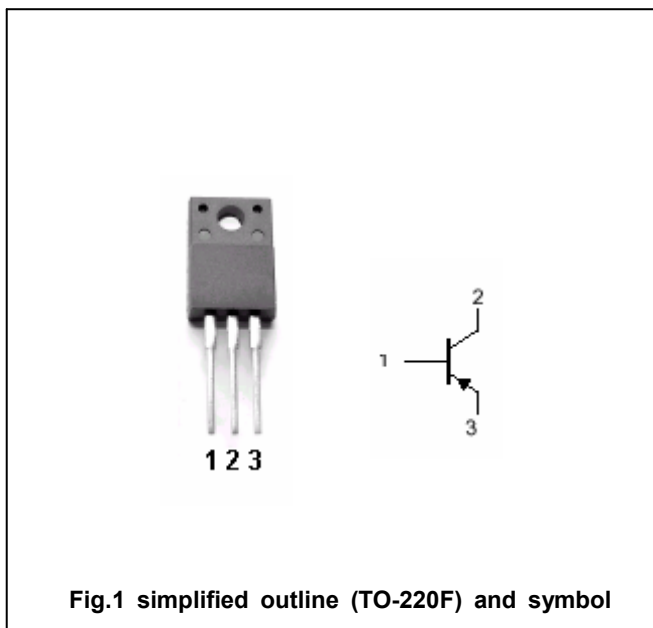

Absolute maximum ratings (Ta=25℃)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-120	V
V _{CEO}	Collector-emitter voltage	Open base	-120	V
V _{EBO}	Emitter-base voltage	Open collector	-5	V
I _C	Collector current		-1.5	A
I _{CM}	Collector current-peak		-3.0	A
P _C	Collector dissipation	T _a =25℃	2	W
		T _C =25℃	20	
T _j	Junction temperature		150	℃
T _{stg}	Storage temperature		-55~150	℃

Silicon PNP Power Transistors

2SB1569

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-1mA ; I _B =0	-120			V
V _{(BR)CBO}	Collector-base breakdown voltage	I _C =-50μA ; I _E =0	-120			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =-50μA ; I _C =0	-5			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-1A ; I _B =-0.1A			-2.0	V
V _{BEsat}	Base-emitter saturation voltage	I _C =-1A ; I _B =-0.1A			-1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-120V ; I _E =0			-1.0	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-4V ; I _C =0			-1.0	μA
h _{FE}	DC current gain	I _C =-1A ; V _{CE} =-5V	60		320	
C _{OB}	Output capacitance	I _E =0 ; V _{CB} =-10V ; f=1MHz		30		pF
f _T	Transition frequency	I _E =0.1A ; V _{CE} =-5V ; f=30MHz		50		MHz

◆ h_{FE} Classifications

D	E	F
60-120	100-200	160-320

Silicon PNP Power Transistors

2SB1569

PACKAGE OUTLINE

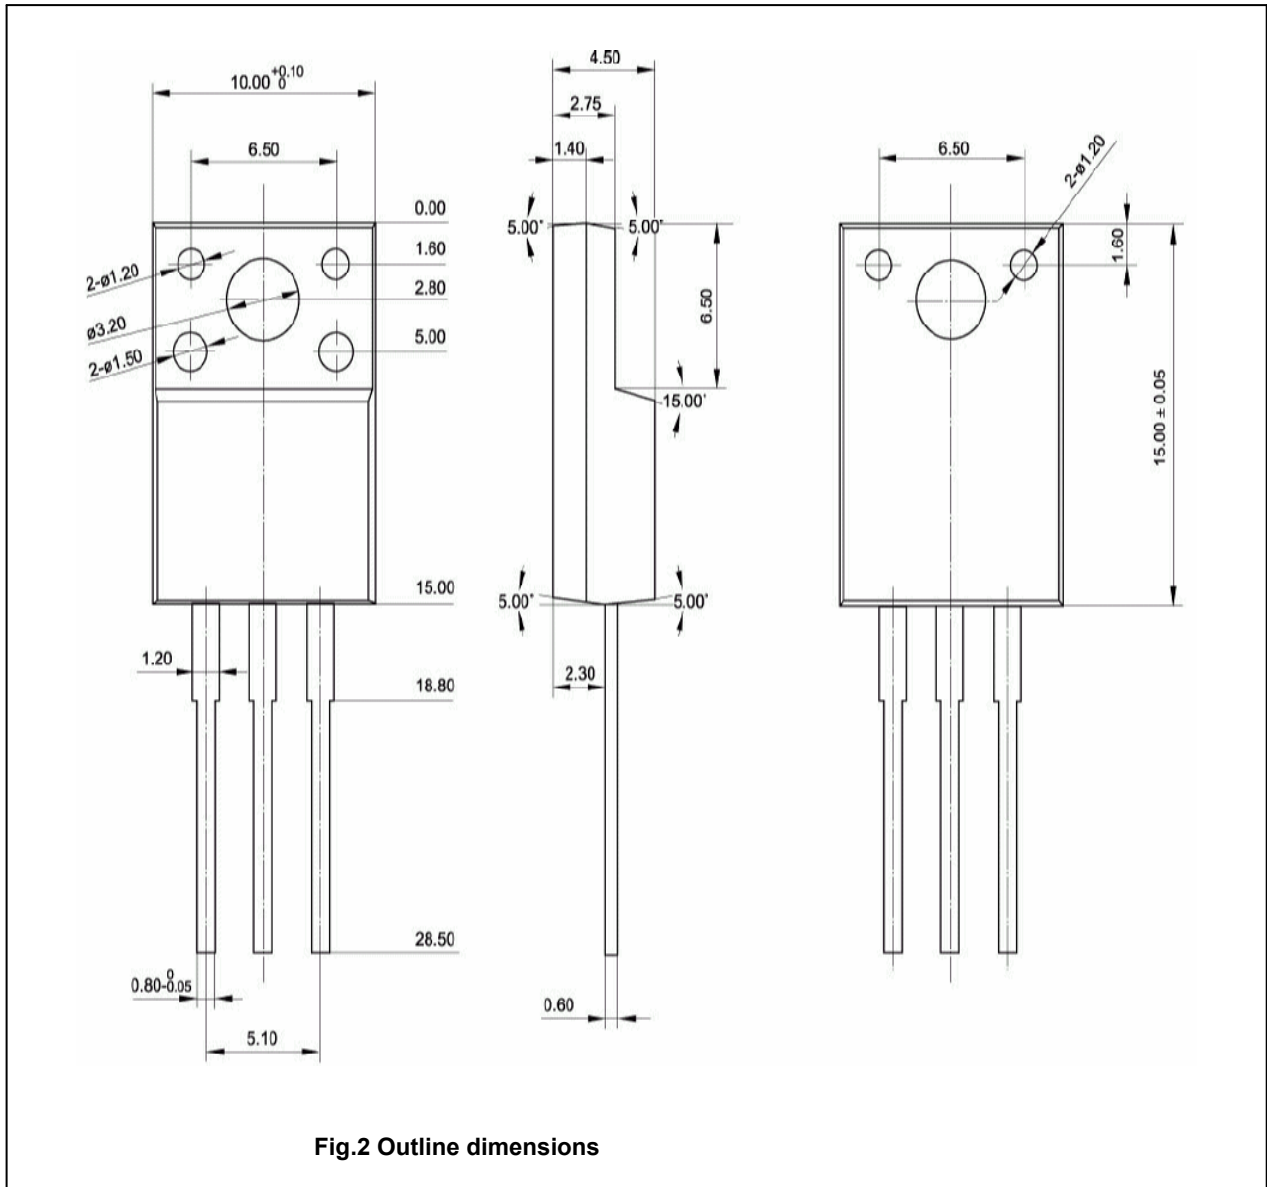


Fig.2 Outline dimensions