

Silicon NPN Power Transistors

2SC1141

DESCRIPTION


- With TO-3 package
- High voltage ,high speed

APPLICATIONS

- Converters
- Inverters
- Switching regulators
- Motor controls

PINNING (See Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

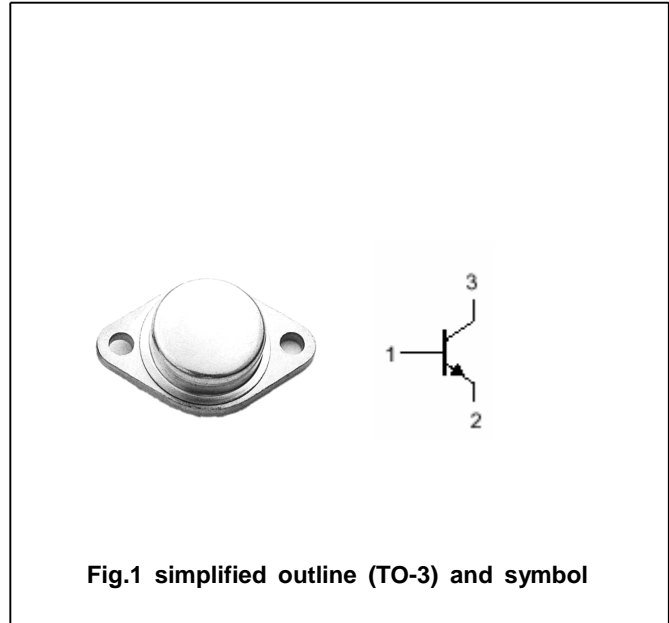**Absolute maximum ratings(Ta=?)**

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_{CBO}	Collector-base voltage	Open emitter	600	V
V_{CEO}	Collector-emitter voltage	Open base	300	V
V_{EBO}	Emitter-base voltage	Open collector	7	V
I_C	Collector current		15	A
P_T	Total power dissipation	$T_{mb}=25?$	150	W
T_j	Junction temperature		200	?
T_{stg}	Storage temperature		-65~200	?

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-mb}$	Thermal resistance from junction to mounting base	1.0	?/W

Silicon NPN Power Transistors

2SC1141

CHARACTERISTICS

T_j=25? unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	I _C =0.1A ; I _B =0	300			V
V _{(BR)EBO}	Emitter-base breakdown voltage	I _E =1mA ; I _C =0	7			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =8A; I _B =1.6A			1.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =8A; I _B =1.6A			1.6	V
I _{CBO}	Collector cut-off current	V _{CB} =600V; I _E =0			0.1	mA
I _{EBO}	Emitter cut-off current	V _{EB} =7V; I _C =0			0.1	mA
h _{FE-1}	DC current gain	I _C =1A ; V _{CE} =5V	15		50	
h _{FE-2}	DC current gain	I _C =7.5A ; V _{CE} =5V	10		25	
f _T	Transition frequency	I _C =1A ; V _{CE} =5V		10		MHz

Silicon NPN Power Transistors

2SC1141

PACKAGE OUTLINE

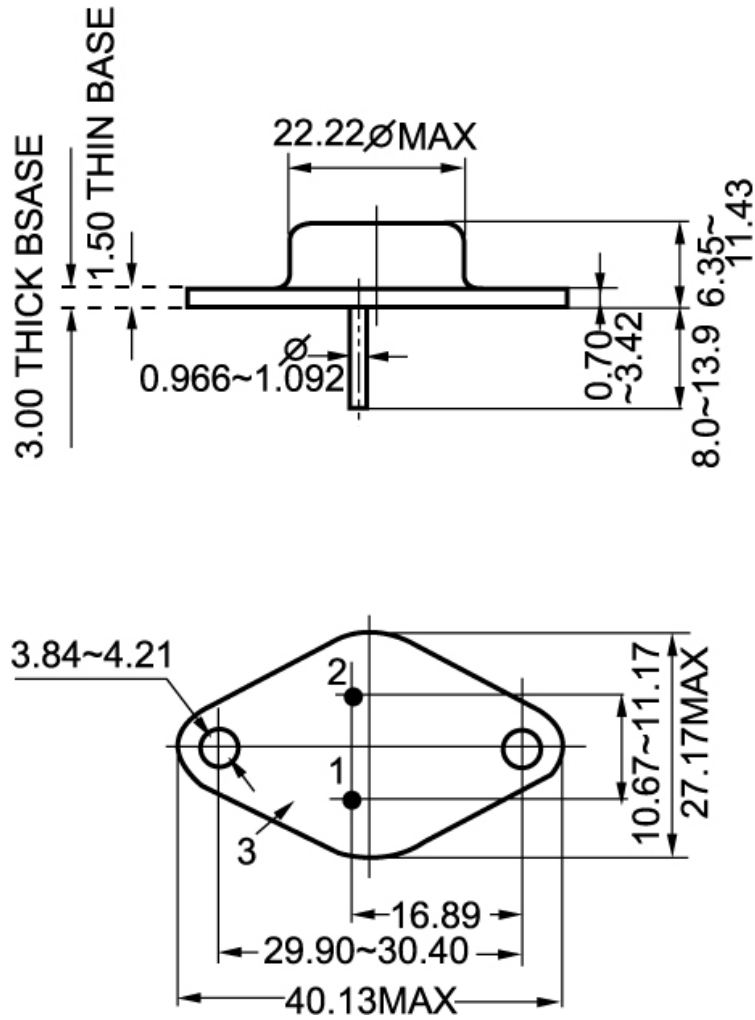


Fig.2 Outline dimensions