

Silicon NPN Power Transistors

2SD687

DESCRIPTION


- With TO-220C package
- Low collector saturation voltage
- DARLINGTON
- High DC current gain

APPLICATIONS

- Switching applications
- Hammer drive,pulse motor drive
- Power amplifier applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

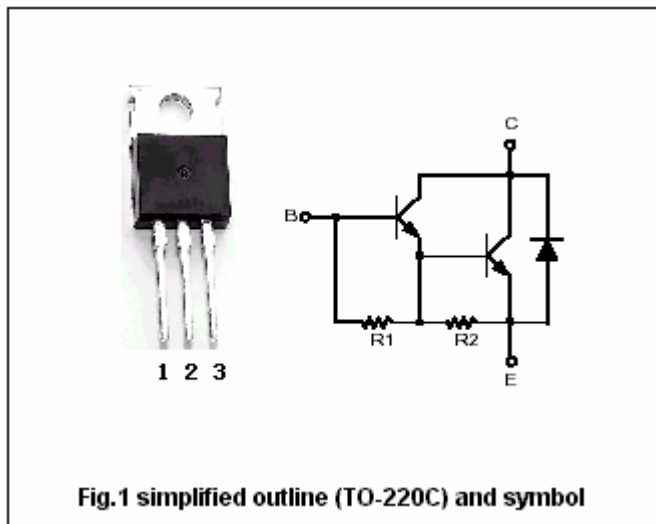

Maximum absolute ratings(Ta=25℃)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	60	V
V _{CEO}	Collector-emitter voltage	Open base	40	V
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		3	A
P _C	Collector power dissipation	T _C =25℃	25	W
T _j	Junction temperature		150	℃
T _{stg}	Storage temperature		-50~150	℃

Silicon NPN Power Transistors

2SD687

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =25mA; I _B =0	40			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =2A; I _B =4mA			1.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =2A; I _B =4mA			2.0	V
I _{CBO}	Collector cut-off current	V _{CB} =60V; I _E =0			20	μA
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			2.5	mA
h _{FE-1}	DC current gain	I _C =1A; V _{CE} =2V	2000			
h _{FE-2}	DC current gain	I _C =3A; V _{CE} =2V	1000			

Switching times

t _{on}	Turn-on time	I _{B1} =-I _{B2} =6mA V _{CC} =30V; R _L =10Ω		0.1		μs
t _s	Storage time			1.0		μs
t _f	Fall time			0.2		μs

