


# 1SS379

## ■ Features

- Low forward voltage : $V_F=1.0V$ (Typ.)
- Low reverse current:  $I_R=0.1nA$ (Typ.)
- Small total capacitance:  $C_T=3.0pF$  (Typ.)

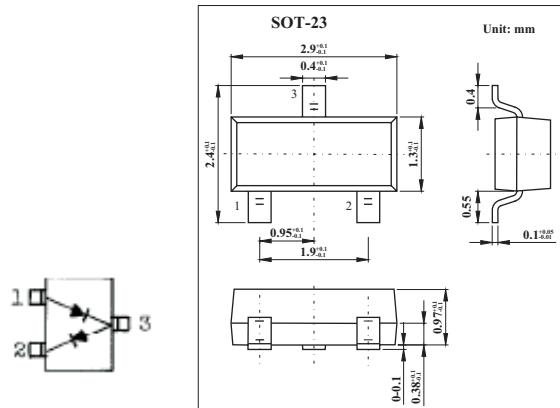

## ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Maximum (peak) reverse voltage	$V_{RM}$	85	V
Reverse voltage	$V_R$	80	V
Average forward current *	$I_O$	100	mA
Maximum (peak) forward current *	$I_{FM}$	300	mA
Surge current (10 ms) *	$I_{FSM}$	2	A
Power dissipation	$P$	150	mW
Junction Temperature	$T_j$	125	°C
Storage Temperature	$T_{stg}$	-55 + 125	°C

\* Unit Rating. Total Rating=Unit Rating X0.7

## ■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F(1)$	$I_F = 100mA$		1.0	1.3	V
Reverse current	$I_R$	$V_R = 80V$		0.1	10	$\mu A$
Total capacitance	$C_T$	$V_R = 0, f = 1.0 \text{ MHz}$		3.0	6.0	pF

## ■ Marking

Marking	P9
---------	----