


## RB400D

### ■ Features

- Small frequency rectification type.(SMD3)
- Low IR.(IR = 1  $\mu$  A Typ.)
- High reliability.

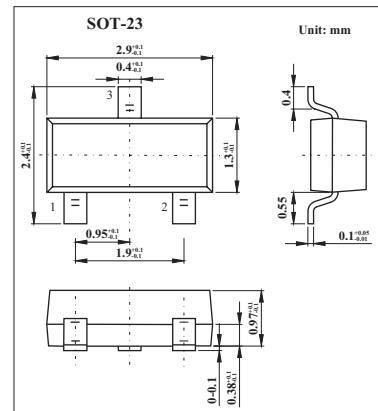

### ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Limits	Unit
Peak reverse voltage	V <sub>RM</sub>	40	V
DC reverse voltage	V <sub>R</sub>	40	V
Mean rectifying current	I <sub>o</sub>	0.5	A
Peak forward surge current	I <sub>FSM</sub>	3	A
Junction temperature	T <sub>j</sub>	125	°C
Storage temperature range	T <sub>st g</sub>	-40 to + 125	°C

### ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V <sub>F</sub>	I <sub>R</sub> = 0.5 $\mu$ A			0.55	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 30 V			50	$\mu$ A
		V <sub>R</sub> = 10 V			30	
Capacitance between terminals	C <sub>T</sub>	V <sub>R</sub> = 0, f = 1.0 MHz		125		pF
		V <sub>R</sub> = 10 V, f = 1.0 MHz		20		ns

### ■ Marking

Marking	D3A
---------	-----