


RB706D-40

■ Features

- Small mold type.(SMD3)
- Low IR
- High reliability

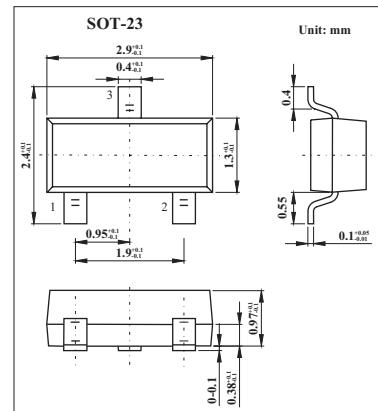

■ Absolute Maximum Ratings Ta = 25°C

| Parameter | Symbol | Limits | Unit |
|--|------------------|--------------|------|
| Reverse voltage (repetitive peak) | V _{RM} | 40 | V |
| DC reverse voltage | V _R | 40 | V |
| Average rectified forward current *1 | I _o | 30 | mA |
| Forward current surge peak (60 Hz 1cyc) *1 | I _{FSM} | 200 | mA |
| Junction temperature | T _j | 125 | °C |
| Storage temperature | T _{stg} | -40 to + 125 | °C |

*1 Rating of per diode : I_o/2

■ Electrical Characteristics Ta = 25°C

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|-------------------------------|----------------|---------------------------------|-----|-----|------|------|
| Forward voltage | V _F | I _F = 1 mA | | | 0.37 | V |
| Reverse current | I _R | V _R = 10 V | | | 1 | µA |
| Capacitance between terminals | C _T | V _R = 1 V, f = 1 MHz | | 2 | | pF |

■ Marking

| | |
|---------|-----|
| Marking | D3J |
|---------|-----|