


# 1SV288

### ■ Features

- High Capacitance Ratio:  $C_{2V}/C_{25V} = 16$  (Typ.)
- Low Series Resistance:  $r_s = 0.92 \Omega$  (Typ.)
- Excellent C-V Characteristics, and Small Tracking Error.
- Useful for small size Tuner.

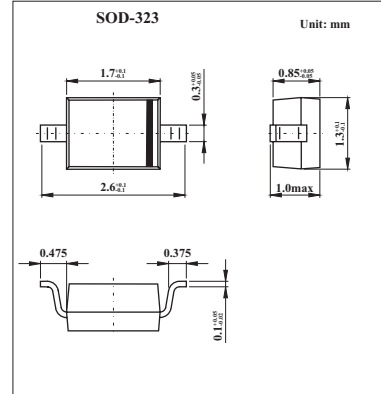

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	30	V
Peak Reverse Voltage	$V_{RM}$	35 ( $R_L = 10 \text{ K } \Omega$ )	V
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +125	$^\circ\text{C}$

### ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_R$	$I_R = 1 \mu\text{A}$	30			V
Reverse Current	$I_R$	$V_R = 28 \text{ V}$			10	nA
Capacitance	$C_{2V}$	$f = 1 \text{ MHz}; V_R = 2 \text{ V}$	41		49.5	pF
	$C_{25V}$	$f = 1 \text{ MHz}; V_R = 25 \text{ V}$	2.5		3.2	
Capacitance Ratio	$C_{2V}/C_{25V}$		15	16		
Series Resistance	$r_s$	$V_R = 5 \text{ V}, f = 470 \text{ MHz}$		0.92	1.05	$\Omega$

Note :

Available in matched group for capacitance to 2.5%.

$$\frac{C(\text{Max.}) - C(\text{Min.})}{C(\text{Min.})} \leq 0.025$$

( $V_R = 2 \sim 25 \text{ V}$ )

### ■ Marking

Marking	TJ
---------	----