


# KDV262

## ■ Features

- High Capacitance Ratio :  $C_{2V}/C_{25V}=12.5(\text{Typ.})$
- Low Series Resistance :  $r_s=0.6 \Omega (\text{Typ.})$
- Excellent C-V Characteristics, and Small Tracking Error.
- Useful for Small Size Tuner.

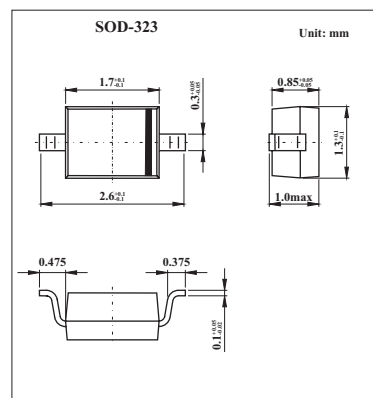

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	34	V
Peak Reverse Voltage	$V_{RM}$	35 ( $R_L=10K \Omega$ )	V
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +125	$^\circ\text{C}$

## ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_R$	$I_R = 1 \mu\text{A}$	34			V
Reverse Current	$I_R$	$V_R = 28 \text{V}$			10	nA
Capacitance	$C_{2V}$	$f = 1 \text{MHz}; V_R = 2 \text{V}$	33	35.5	38	pF
	$C_{25V}$	$f = 1 \text{MHz}; V_R = 25 \text{V}$	2.6	2.85	3.0	
Capacitance Ratio	$C_{2V}/C_{25V}$		12	12.5		
	$C_{25V}/C_{28V}$		1.03			
Series Resistance	$r_s$	$V_R = 5\text{V}, f = 470 \text{MHz}$		0.6	0.8	$\Omega$

Note :

Available in matched group for capacitance to 2.0%.

$$\frac{C(\text{Max.})-C(\text{Min.})}{C(\text{Min.})} \leq 0.02$$

( $V_R=2\sim 25\text{V}$ )

## ■ Marking

Marking	UQ
---------	----