


# **1SS356**

## ■ Features

- Small mold type. (UMD2)
- High reliability.

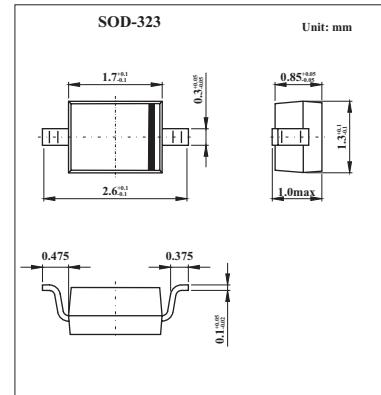

## ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Limits	Unit
Forward current (DC)	I <sub>F</sub>	100	mA
Reverse voltage (DC)	V <sub>R</sub>	35	V
Junction temperature	T <sub>J</sub>	125	°C
Storage temperature range	T <sub>stg</sub>	-55 to +125	°C

## ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA			1.0	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 25 V			10	nA
Capacitance between terminals	C <sub>t</sub>	V <sub>R</sub> = 6 V, f = 1 MHz			1.2	pF
Forward operating resistance	r <sub>f</sub>	I <sub>F</sub> = 2 mA, f = 100 MHz			0.9	Ω