


FEATURES

- RoHS Compliant Product
- Small Surface Mounting Type
- Low Reverse Current and Low Forward Voltage
- High Reliability
- High Speed Switching
- **Pb-Free package is available**
 RoHS product for packing code suffix "G"
 Halogen free product for packing code suffix "H"
- **Moisture Sensitivity Level 1**
- **Polarity:** Color band denotes cathode end

MECHANICAL DATA

- Case: Molded Plastic, JEDEC SOD-323(SC-76)
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Indicated by Cathode Band
- Mounting Position: Any
- Weight : 0.000159 ounce, 0.0045 gram

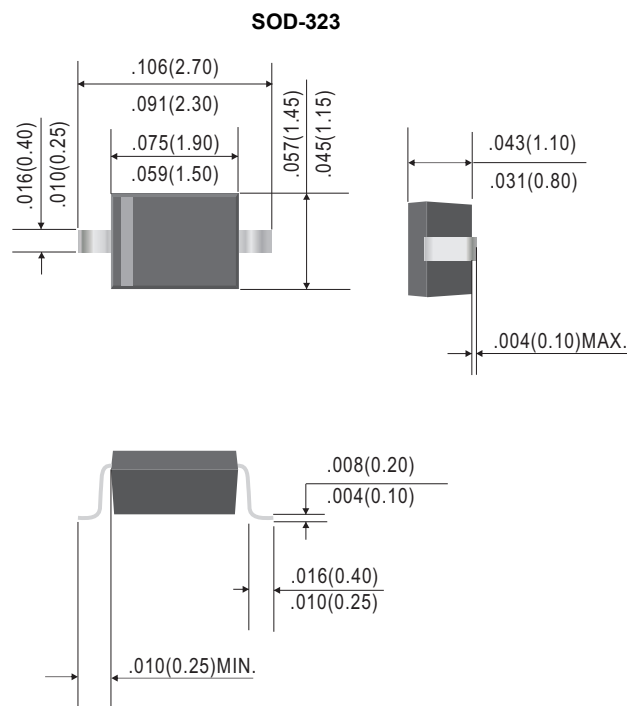

Dimensions in inches and (millimeters)

Marking Code: JVor 5 or 5E

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	CONDITIONS	SYMBOL	Min.	Typ.	Max.	UNITS
Repetitive Peak Reverse Voltage		V_{RM}			40	V
Continuous Reverse Voltage		V_R			30	V
Forward Voltage	$I_F = 1\text{mA DC}$	V_F			0.37	V
Reverse Current	$V_R = 30\text{V DC}$	I_R			0.5	μA
Mean Rectifying Current		I_O			30	mA
Forward Surge Current	8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}		200		mA
Capacitance between terminals	$V_R = 1\text{V}, f = 1\text{MHz}$	C_T		2.0		pF
Operating Temperature		T_J		125		°C
Storage Temperature		T_{STG}	-40		+125	°C



● RATING AND CHARACTERISTICS CURVES

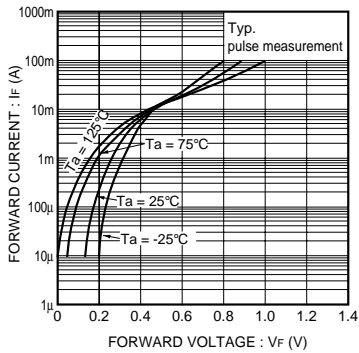


Fig. 1 Forward characteristics

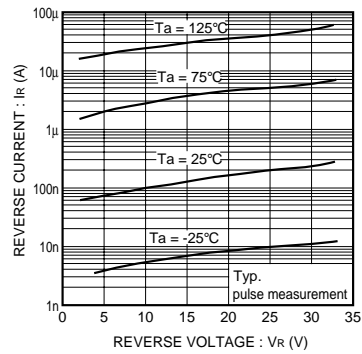


Fig. 2 Reverse characteristics

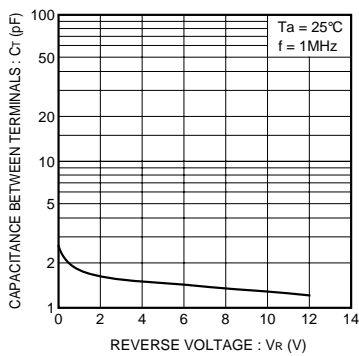


Fig. 3 Capacitance between terminals characteristics



Ordering Information:

Device PN	Packing
SCS751V -T ⁽¹⁾ G ⁽²⁾ -WS	Tape&Reel: 3 Kpcs/Reel

Note: (1) Packing code, Tape & Reel Packing

(2) RoHS product for packing code suffix "G" ; Halogen free product for packing code suffix "H"

*****Disclaimer*****

WILLAS reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. WILLAS or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on WILLAS data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. WILLAS does not assume any liability arising out of the application or use of any product or circuit.

WILLAS products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of WILLAS. Customers using or selling WILLAS components for use in such applications do so at their own risk and shall agree to fully indemnify WILLAS Inc and its subsidiaries harmless against all claims, damages and expenditures.