


N-channel Enhancement-mode Power MOSFET

PRODUCT SUMMARY

BV _{DSS}	25V
R _{DS(ON)}	12mΩ
I _D	11.8A

 Pb-free; RoHS-compliant SO-8

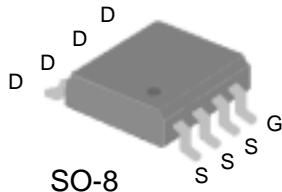

DESCRIPTION

The SSM7811GM achieves fast switching performance with low gate charge without a complex drive circuit. It is suitable for low voltage applications such as DC/DC converters and general load-switching circuits.

The SSM7811GM is supplied in an RoHS-compliant SO-8 package, which is widely used for medium power commercial and industrial surface mount applications.

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Units
V _{DS}	Drain-source voltage	25	V
V _{GS}	Gate-source voltage	±12	V
I _D	Continuous drain current, T _C = 25°C T _C = 70°C	11.8 9.4	A
I _{DM}	Pulsed drain current ¹	30	A
P _D	Total power dissipation, T _C = 25°C Linear derating factor	2.5 0.02	W W/°C
T _{STG}	Storage temperature range	-55 to 150	°C
T _J	Operating junction temperature range	-55 to 150	°C

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Units
R _{θJA}	Maximum thermal resistance, junction-ambient ³	50	°C/W

Notes:

- 1.Pulse width must be limited to avoid exceeding the maximum junction temperature of 150°C.
- 2.Pulse width <300us, duty cycle <2%.
- 3.Mounted on a square inch of copper pad on FR4 board ; 125°C/W when mounted on the minimum pad area required for soldering.

ELECTRICAL CHARACTERISTICS (at $T_j = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-source breakdown voltage	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	25	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown voltage temperature coefficient	Reference to 25°C , $I_D=1\text{mA}$	-	0.1	-	$\text{V}/^\circ\text{C}$
$R_{DS(\text{ON})}$	Static drain-source on-resistance ²	$V_{GS}=4.5\text{V}$, $I_D=11.8\text{A}$	-	10	12	$\text{m}\Omega$
$V_{GS(\text{th})}$	Gate threshold voltage	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	0.5	-	1.2	V
g_{fs}	Forward transconductance	$V_{DS}=15\text{V}$, $I_D=11.8\text{A}$	-	30	-	S
I_{DSS}	Drain-source leakage current	$V_{DS}=25\text{V}$, $V_{GS}=0\text{V}$ $V_{DS}=20\text{V}$, $V_{GS}=0\text{V}$, $T_j = 70^\circ\text{C}$	-	-	1	uA
I_{GSS}	Gate-source leakage current	$V_{GS}=\pm 12\text{V}$	-	-	± 100	nA
Q_g	Total gate charge ²	$I_D=11.8\text{A}$	-	32	-	nC
Q_{gs}	Gate-source charge	$V_{DS}=20\text{V}$	-	2.6	-	nC
Q_{gd}	Gate-drain ("Miller") charge	$V_{GS}=5\text{V}$	-	15.5	-	nC
$t_{d(\text{on})}$	Turn-on delay time ²	$V_{DS}=15\text{V}$	-	12	-	ns
t_r	Rise time	$I_D=1.5\text{A}$	-	28	-	ns
$t_{d(\text{off})}$	Turn-off delay time	$R_G=3.3\Omega$, $V_{GS}=5\text{V}$	-	41	-	ns
t_f	Fall time	$R_D=10\Omega$	-	40	-	ns
C_{iss}	Input capacitance	$V_{GS}=0\text{V}$	-	800	-	pF
C_{oss}	Output capacitance	$V_{DS}=25\text{V}$	-	460	-	pF
C_{rss}	Reverse transfer capacitance	f=1.0MHz	-	215	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward voltage ²	$I_S=2.3\text{A}$, $V_{GS}=0\text{V}$	-	-	1.2	V
I_{SD}	Continuous Source Current (Body Diode)	$V_D=V_G=0\text{V}$, $V_S=1.2\text{V}$	-	-	2.08	A

Notes:

1. Pulse width must be limited to avoid exceeding the maximum junction temperature of 150°C .
2. Pulse width <300us, duty cycle <2%.

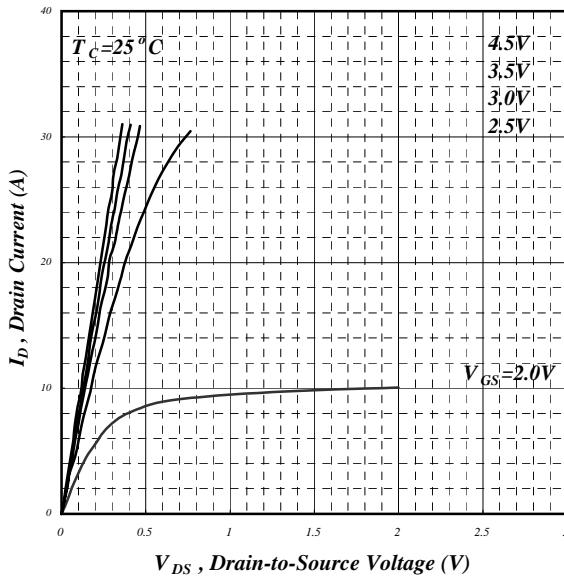


Fig 1. Typical Output Characteristics

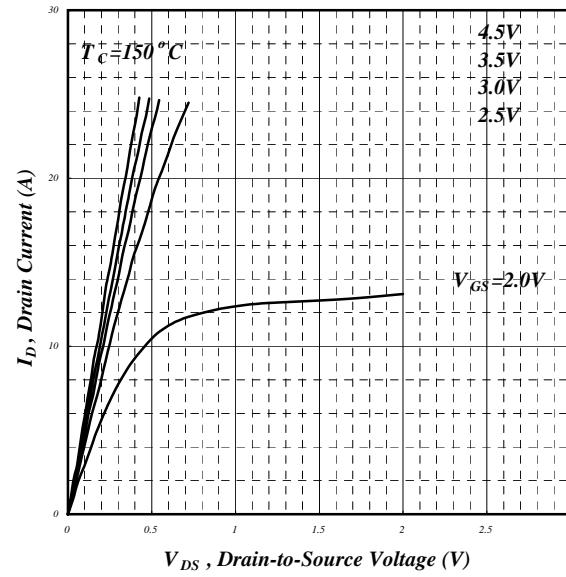


Fig 2. Typical Output Characteristics

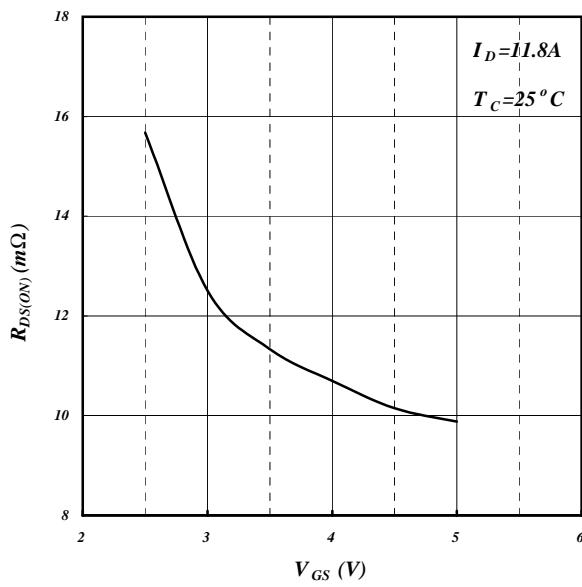


Fig 3. On-Resistance vs. Gate Voltage

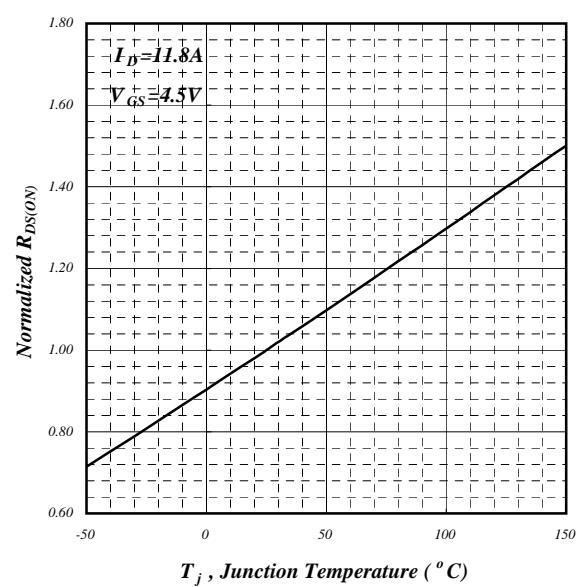


Fig 4. Normalized On-Resistance vs. Junction Temperature

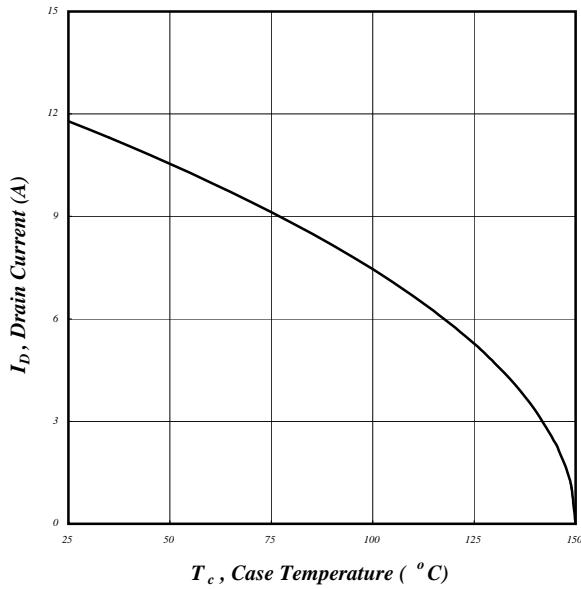


Fig 5. Maximum Drain Current vs.
Case Temperature

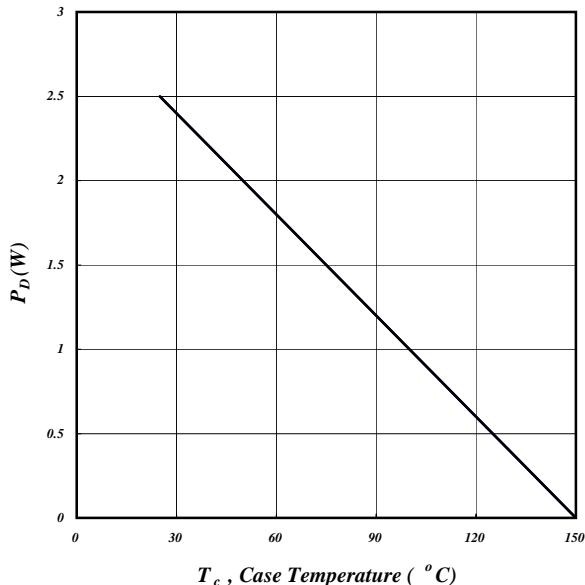


Fig 6. Typical Power Dissipation

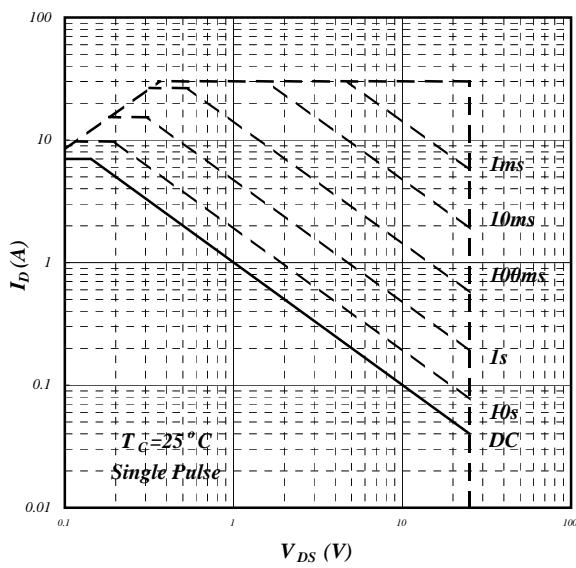


Fig 7. Maximum Safe Operating Area

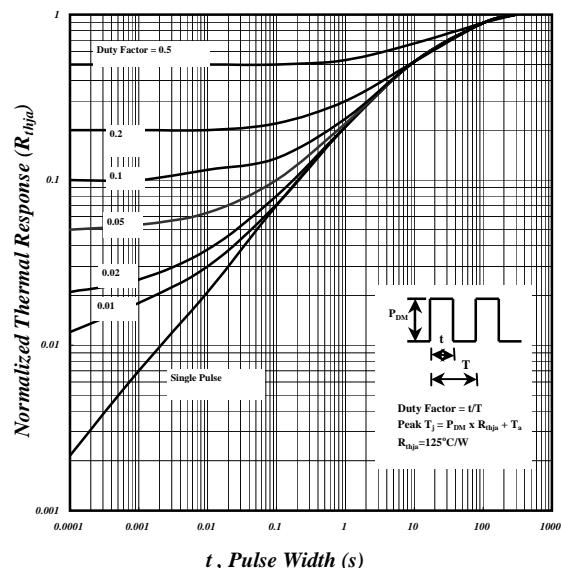


Fig 8. Effective Transient Thermal Impedance

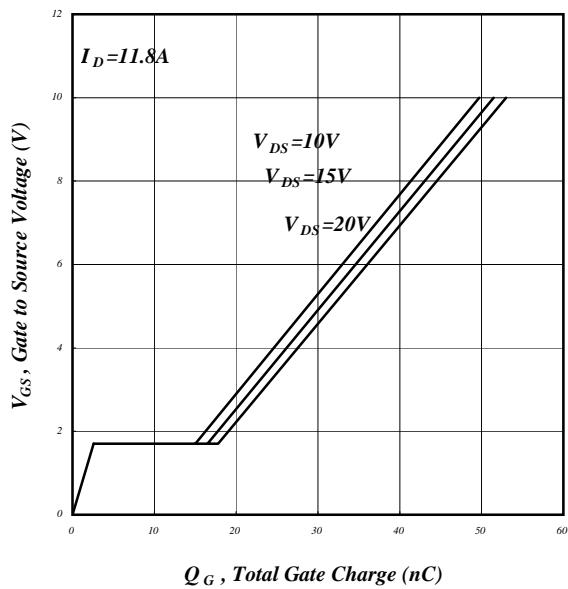


Fig 9. Gate Charge Characteristics

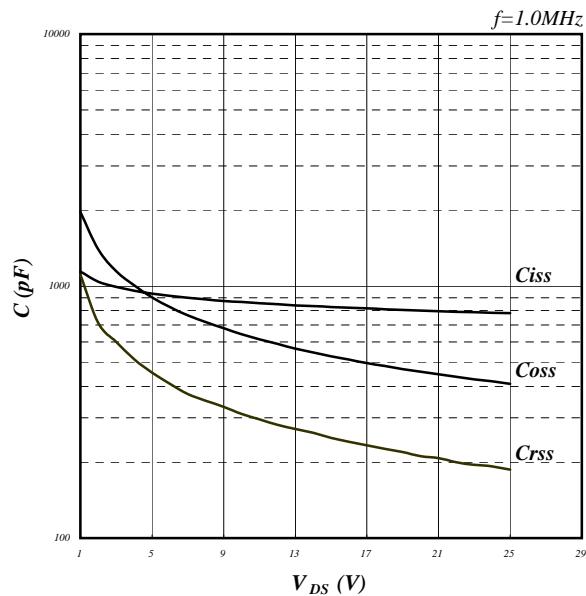
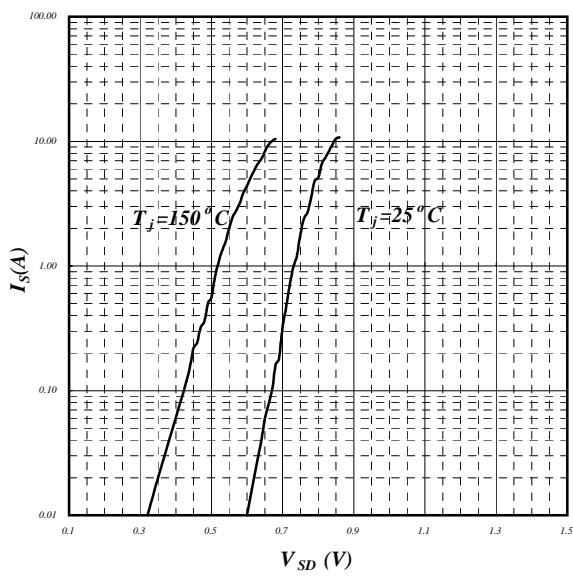
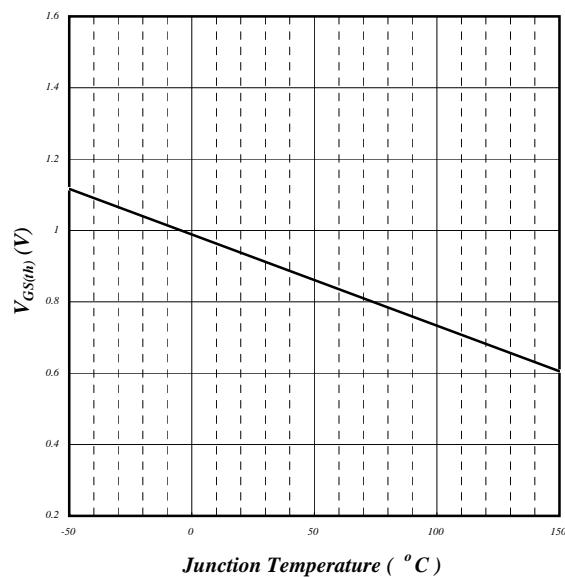


Fig 10. Typical Capacitance Characteristics


 Fig 11. Forward Characteristic of
Reverse Diode

 Fig 12. Gate Threshold Voltage vs.
Junction Temperature

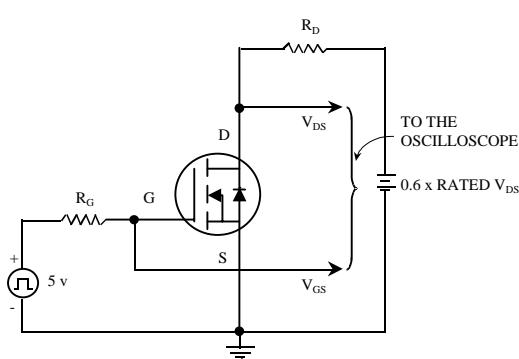


Fig 13. Switching Time Circuit

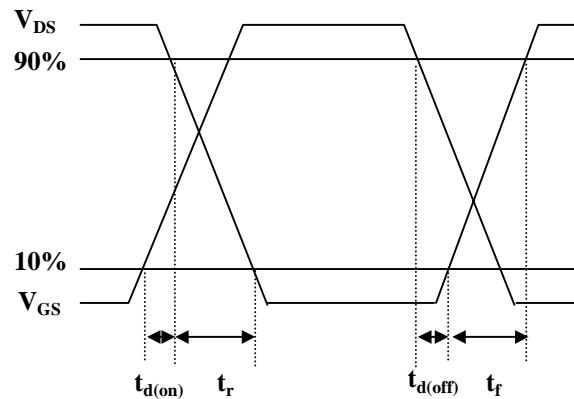


Fig 14. Switching Time Waveform

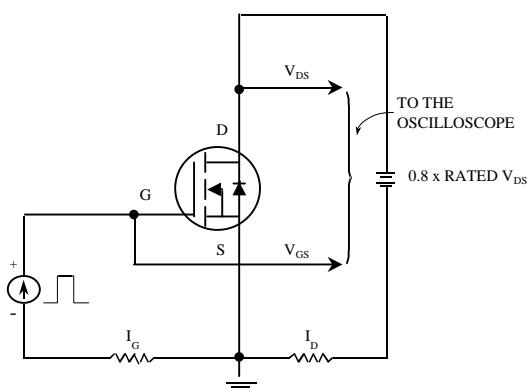


Fig 15. Gate Charge Circuit


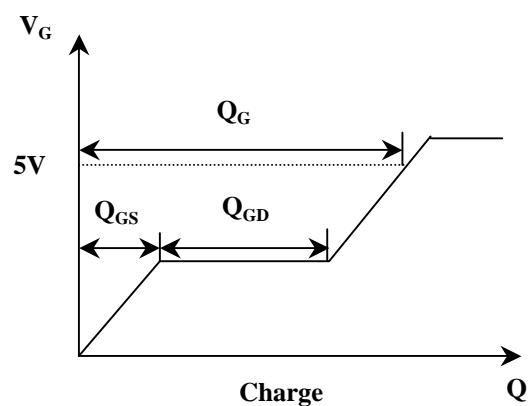


Fig 16. Gate Charge Waveform

PHYSICAL DIMENSIONS

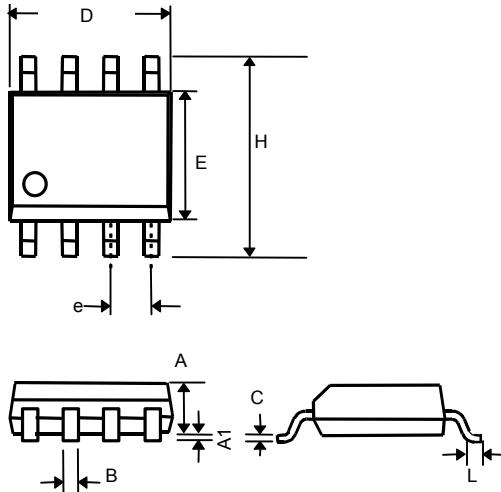


SYMBOL	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27(TYP)	
H	5.80	6.50
L	0.38	1.27

All dimensions in millimeters.

Dimensions do not include mold protrusions.

PART MARKING

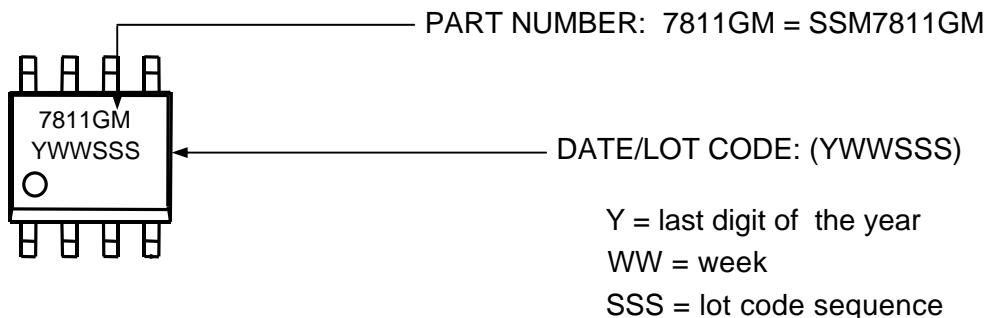

PACKING:

Moisture sensitivity level MSL3

3000 pcs in antistatic tape on a 13 inch (330mm) reel packed in a moisture barrier bag (MBB).

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, express or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.