

5A Avg.

80 Volts


SBD

50PHSA08

■最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	$V_{RRM}$	80	V
平均整流電流 Average Rectified Forward Current	$I_O$	$T_a=27^{\circ}\text{C}^{*1}$ $V_{RM}=40\text{V}$	2.2
		50Hz、正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load $T_l=116^{\circ}\text{C}$ $V_{RM}=40\text{V}$ ( $T_l$ :Lead Temperature)	5.0
実効順電流 R.M.S. Forward Current	$I_F(\text{RMS})$	7.85	A
サージ順電流 Surge Forward Current	$I_{FSM}$	120 50Hz正弦半波、1サイクル、非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	$T_{jw}$	-40~+150	$^{\circ}\text{C}$
保存温度範囲 Storage Temperature Range	$T_{stg}$	-40~+150	$^{\circ}\text{C}$

■OUTLINE DRAWING(mm)

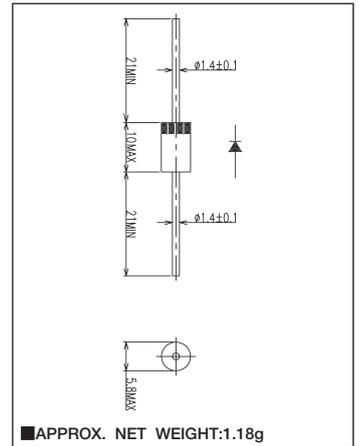

■電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	$I_{RM}$	$T_j=25^{\circ}\text{C}$ , $V_{RM}=80\text{V}$	—	—	100	$\mu\text{A}$
ピーク順電圧 Peak Forward Voltage	$V_{FM}$	$T_j=25^{\circ}\text{C}$ , $I_{FM}=5\text{A}$	—	—	0.70	V
熱抵抗 Thermal Resistance	$R_{th(j-l)}$	接合部・リード間 Junction to Lead	—	—	8	$^{\circ}\text{C}/\text{W}$
	$R_{th(j-a)}$	接合部・周囲間 Junction to Ambient	*1 (単体フィン無し)		80	$^{\circ}\text{C}/\text{W}$

\*1: 単体フィン無し / Without Fin or P.C. Board

■定格・特性曲線

