


PNP Transistors

BC856~BC858 (KC856~KC858)

■ Features

- Ideally suited for automatic insertion
- For Switching and AF Amplifier Applications

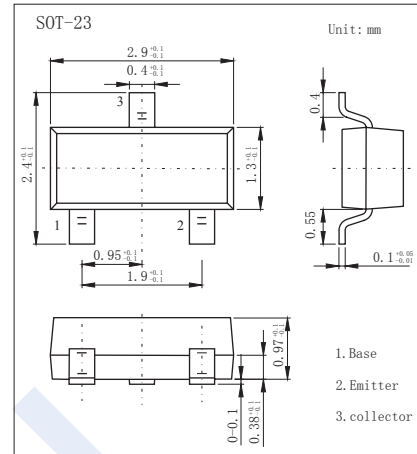

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	BC856	BC857	BC858	Unit
Collector - Base Voltage	V_{CBO}	-80	-50	-30	V
Collector - Emitter Voltage	V_{CEO}	-65	-45	-30	
Emitter - Base Voltage	V_{EBO}	-5			
Collector Current - Continuous	I_C	-100			mA
Collector Power Dissipation	P_C	200			mW
Junction Temperature	T_J	150			$^\circ\text{C}$
Storage Temperature range	T_{stg}	-55 to 150			

PNP Transistors

BC856~BC858 (KC856~KC858)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Collector- base breakdown voltage	BC856	$I_C = -100 \mu A, I_E = 0$	-80			V	
	BC857		-50				
	BC858		-30				
Collector- emitter breakdown voltage	BC856	$I_C = -1mA, I_B = 0$	-65			V	
	BC857		-45				
	BC858		-30				
Emitter - base breakdown voltage	V_{EBO}	$I_E = -100 \mu A, I_C = 0$	-5				
Collector-base cut-off current	BC856	I_{CBO}	$V_{CB} = -70 V, I_E = 0$			nA	
	BC857		$V_{CB} = -45 V, I_E = 0$				
	BC858		$V_{CB} = -25 V, I_E = 0$				
Collector- emitter cut-off current	BC856	I_{CEO}	$V_{CE} = -55 V, I_E = 0$			uA	
	BC857		$V_{CE} = -40 V, I_E = 0$				
	BC858		$V_{CE} = -25 V, I_E = 0$				
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-100	nA	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100 mA, I_B = -5mA$			-0.5	V	
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = -100 mA, I_B = -5mA$			-1.1		
DC current gain	BC856A,857A,858A	h_{FE}	$V_{CE} = -5V, I_C = -2mA$	125		250	
	BC856B,857B,858B			220		475	
	BC857C,858C			420		800	
Collector output capacitance	C_{ob}	$V_{CB} = -10V, f = 1MHz$			4.5	pF	
Transition frequency	f_T	$V_{CE} = -5V, I_C = -10mA, f = 100MHz$	100			MHz	

■ Classification of hfe

Type	BC856A	BC856B	BC857A	BC857B	BC857C	BC858A	BC858B	BC858C
Range	125-250	220-475	125-250	220-475	420-800	125-250	220-475	420-800
Marking	3A	3B	3E	3F	3G	3J	3K	3L

PNP Transistors

BC856~BC858 (KC856~KC858)

■ Typical Characteristics

