


CJD2955 PNP
CJD3055 NPN

**SURFACE MOUNT SILICON
COMPLEMENTARY
POWER TRANSISTORS**



www.centrasemi.com

DPAK
POWER!



DPAK CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CJD2955 and CJD3055 are complementary silicon power transistors manufactured by the epitaxial base process, mounted in a surface mount package, and designed for high current amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL		UNITS
Collector-Base Voltage	V_{CBO}	70	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	5.0	V
Continuous Collector Current	I_C	10	A
Continuous Base Current	I_B	6.0	A
Power Dissipation	P_D	20	W
Power Dissipation ($T_A=25^\circ\text{C}$)	P_D	1.75	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	θ_{JC}	6.25	$^\circ\text{C/W}$
Thermal Resistance	θ_{JA}	71.4	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CEO}	$V_{CE}=30\text{V}$		50	μA
I_{CEV}	$V_{CE}=70\text{V}, V_{BE(\text{off})}=1.5\text{V}$		20	μA
I_{CEV}	$V_{CE}=70\text{V}, V_{BE(\text{off})}=1.5\text{V}, T_C=150^\circ\text{C}$		2.0	mA
I_{CBO}	$V_{CB}=70\text{V}$		20	μA
I_{CBO}	$V_{CB}=70\text{V}, T_C=150^\circ\text{C}$		2.0	mA
I_{EBO}	$V_{EB}=5.0\text{V}$		500	μA
BV_{CEO}	$I_C=30\text{mA}$	60		V
$V_{CE(\text{SAT})}$	$I_C=4.0\text{A}, I_B=400\text{mA}$		1.1	V
$V_{CE(\text{SAT})}$	$I_C=10\text{A}, I_B=3.3\text{A}$		8.0	V
$V_{BE(\text{ON})}$	$V_{CE}=4.0\text{V}, I_C=4.0\text{A}$		1.8	V
h_{FE}	$V_{CE}=4.0\text{V}, I_C=4.0\text{A}$	20	100	
h_{FE}	$V_{CE}=4.0\text{V}, I_C=10\text{A}$	5.0		
f_T	$V_{CE}=10\text{V}, I_C=500\text{mA}, f=1.0\text{MHz}$	2.0		MHz


R4 (21-January 2013)

CJD2955 PNP
CJD3055 NPN



**SURFACE MOUNT SILICON
COMPLEMENTARY
POWER TRANSISTORS**

DPAK CASE - MECHANICAL OUTLINE

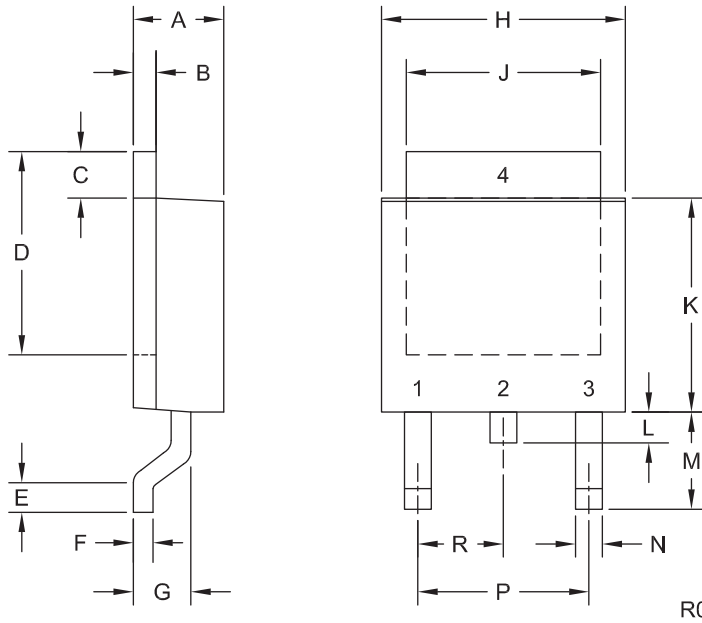

LEAD CODE:

- 1) Base
- 2) Collector
- 3) Emitter
- 4) Collector

MARKING:

FULL PART NUMBER

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.083	0.108	2.10	2.75
B	0.016	0.032	0.40	0.81
C	0.035	0.063	0.89	1.60
D	0.203	0.228	5.15	5.79
E	0.020	-	0.51	-
F	0.018	0.024	0.45	0.60
G	0.051	0.071	1.30	1.80
H	0.248	0.268	6.30	6.81
J	0.197	0.217	5.00	5.50
K	0.209	0.245	5.30	6.22
L	0.025	0.040	0.64	1.02
M	0.090	0.115	2.30	2.91
N	0.012	0.045	0.30	1.14
P	0.180		4.60	
R	0.090		2.30	

DPAK (REV: R0)

R4 (21-January 2013)