



**CHENMKO ENTERPRISE CO.,LTD**

*Halogens free devices*

**SURFACE MOUNT**  
**Low Ferquency NPN Transistor**  
**VOLTAGE 12 Volts CURRENT 0.5 Ampere**




**2SC5663TGP**

**APPLICATION**  
 \* For switching,for muting.

**FEATURE**  
 \* Small surface mounting type. (SC-75/SOT-416)  
 \* High current  
 \* Collector saturation voltage is low.  
 $V_{CE(sat)} \leq 250\text{mA}$   
 At  $I_C=200\text{mA}/I_B=10\text{mA}$

**CONSTRUCTION**  
 \* NPN Silicon Transistor

**MARKING**  
 \* BX

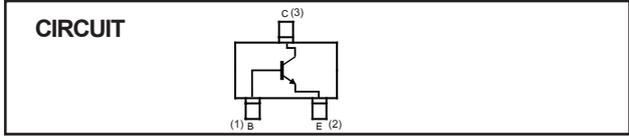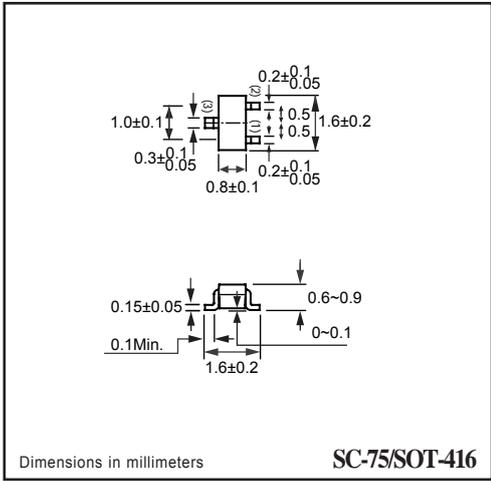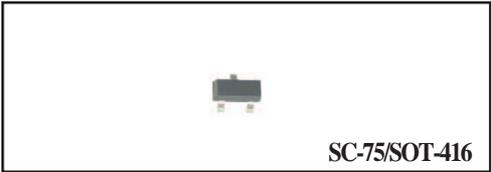

**MAXIMUM RATINGS** ( At  $T_A = 25^\circ\text{C}$  unless otherwise noted )

RATINGS	CONDITION	SYMBOL	MIN.	MAX.	UNITS
Collector - Base Voltage	Open Emitter	$V_{CBO}$	-	15	Volts
Collector - Emitter Voltage	Open Base	$V_{CEO}$	-	12	Volts
Collector Current DC		$I_C$	-	500	mAmps
Peak Collector Current		$I_{CM}$	-	1000	mAmps
Total Power Dissipation	$T_A \leq 25^\circ\text{C}$ ; Note 1	$P_{TOT}$	-	150	mW
Storage Temperature		$T_{STG}$	-55	+150	$^\circ\text{C}$
Junction Temperature		$T_J$	-	+150	$^\circ\text{C}$
Operating Ambient Temperature		$T_{AMB}$	-55	+150	$^\circ\text{C}$

**Note**

2007-06

1. Transistor mounted on ceramic substrate 50mmX50mmX0.8t.

## RATING CHARACTERISTICS ( 2SC5663TGP )

### THERMAL CHARACTERISTICS CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise

SYMBOL	PARAMETER	CONDITIONS	MIN.	Typ.	MAX.	UNIT
$I_{CBO}$	collector cut-off current	$V_{CB}=15V$	–	–	0.1	$\mu A$
$BV_{CBO}$	collector-base breakdown voltage	$I_C = 10\mu A$	15	–	–	V
$BV_{CEO}$	collector-emitter breakdown voltage	$I_C = 1mA$	12	–	–	V
$BV_{EBO}$	emitter-base breakdown voltage	$I_E = 10\mu A$	6	–	–	V
$h_{FE}$	DC current transfer ratio	$V_{CE}=2V, I_C=10mA$	270	–	680	
$V_{CEsat}$	collector-emitter saturation voltage	$I_C/I_B=200mA/10mA$	–	90	250	mV
$C_{ob}$	collector output capacitance	$I_E = 0; V_{CB} = 10V; f = 1\text{ MHz}$	–	7.5	–	pF
$f_T$	transition frequency	$I_E = -10\text{ mA}; V_{CE} = 2\text{ V}; f = 30\text{ MHz}$	–	320	–	MHz

#### Note

1. Pulse test:  $t_p \leq 300\text{ }\mu s$ ;  $\delta \leq 0.02$ .

# RATING CHARACTERISTIC CURVES ( 2SC5663TGP )

## ●Electrical characteristic curves

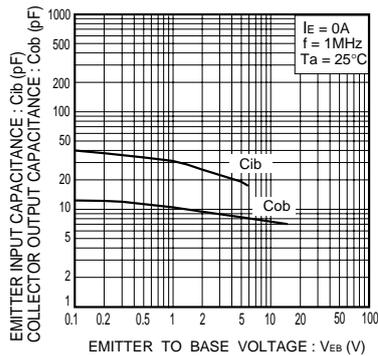
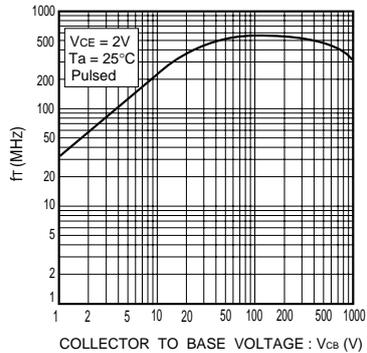
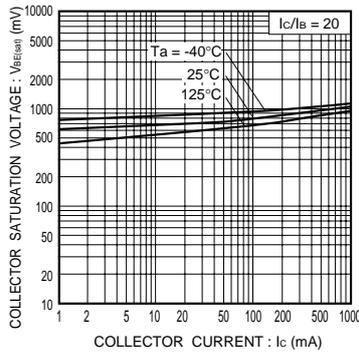
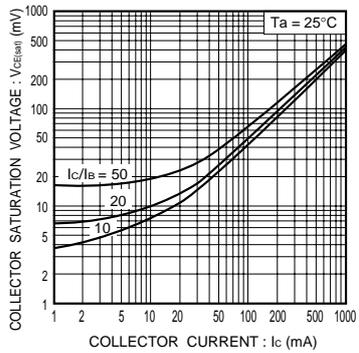
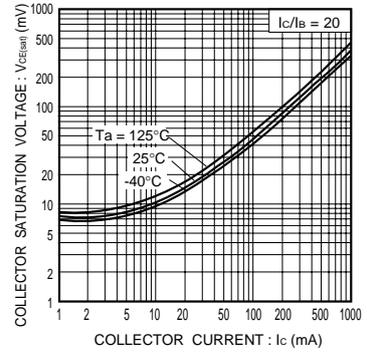
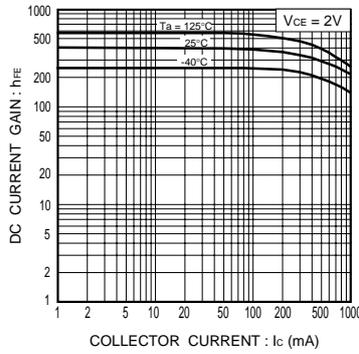
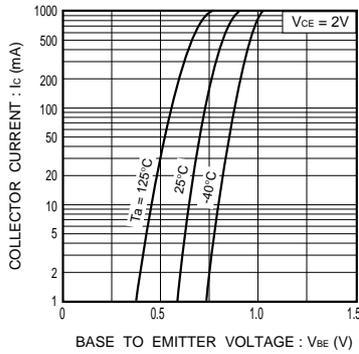


Fig.7 Collector output capacitance vs collector-base voltage  
Emitter input capacitance vs emitter-base voltage