



CHENMKO ENTERPRISE CO., LTD

SURFACE MOUNT

N-Channel Enhancement Mode Field Effect Transistor

VOLTAGE 30 Volts CURRENT 40 Ampere

CHM703ALPAGP

APPLICATION

- * Servo motor control.
- * Power MOSFET gate drivers.
- * Other switching applications.


FEATURE

- * Small package. (TO-252)
- * Super high dense cell design for extremely low R_{DS(ON)}.
- * High power and current handing capability.


CONSTRUCTION

- * N-Channel Enhancement

CIRCUIT



D-PAK(TO-252)

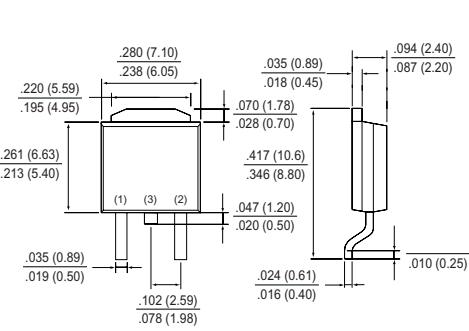

Dimensions in inches and (millimeters)

TO-252

Absolute Maximum Ratings

T_A = 25°C unless otherwise noted

| Symbol | Parameter | CHM703ALPAGP | Units |
|------------------|----------------------------------------------------|--------------|-------|
| V _{DSS} | Drain-Source Voltage | 30 | V |
| V _{GSS} | Gate-Source Voltage | ±20 | V |
| I _D | Maximum Drain Current - Continuous | 40 | A |
| | - Pulsed (Note 3) | 120 | |
| P _D | Maximum Power Dissipation at T _c = 25°C | 50 | W |
| T _J | Operating Temperature Range | -55 to 150 | °C |
| T _{STG} | Storage Temperature Range | -55 to 150 | °C |

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

Thermal characteristics

| | | | |
|------------------|--------------------------------------------------|----|------|
| R _{θJA} | Thermal Resistance, Junction-to-Ambient (Note 1) | 50 | °C/W |
|------------------|--------------------------------------------------|----|------|

2006-02

ELECTRICAL CHARACTERISTIC (CHM703ALPAGP)

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------|-----------|------------|-----|-----|-----|-------|
|--------|-----------|------------|-----|-----|-----|-------|

OFF CHARACTERISTICS

| | | | | | | |
|--------------------------|---------------------------------|-------------------------------------------------------------|----|--|------|---------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$ | 30 | | | V |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{\text{DS}} = 24 \text{ V}, V_{\text{GS}} = 0 \text{ V}$ | | | 1 | μA |
| I_{GSSF} | Gate-Body Leakage | $V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0 \text{ V}$ | | | +100 | nA |
| I_{GSSR} | Gate-Body Leakage | $V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0 \text{ V}$ | | | -100 | nA |

ON CHARACTERISTICS (Note 2)

| | | | | | | |
|---------------------|-----------------------------------|--------------------------------------------------------|---|----|----|------------------|
| $V_{\text{GS(th)}}$ | Gate Threshold Voltage | $V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$ | 1 | | 3 | V |
| $R_{\text{DS(ON)}}$ | Static Drain-Source On-Resistance | $V_{\text{GS}}=10\text{V}, I_D=25\text{A}$ | | 15 | 19 | $\text{m}\Omega$ |
| | | $V_{\text{GS}}=4.5\text{V}, I_D=10\text{A}$ | | 23 | 32 | |
| g_{FS} | Forward Transconductance | $V_{\text{DS}} = 10\text{V}, I_D = 25\text{A}$ | | 30 | | S |

SWITCHING CHARACTERISTICS (Note 4)

| | | | | | | |
|------------------|--------------------|-------------------------------------------------------------------------------------------------------------|--|-----|-----|----|
| Q_g | Total Gate Charge | $V_{\text{DS}}=10\text{V}, I_D=25\text{A}$ $V_{\text{GS}}=5\text{V}$ | | 15 | 20 | nC |
| Q_{gs} | Gate-Source Charge | | | 4 | | |
| Q_{gd} | Gate-Drain Charge | | | 6 | | |
| t_{on} | Turn-On Time | $V_{\text{DD}}= 15\text{V}$ $I_D=25\text{A}, V_{\text{GS}}= 10 \text{ V}$ $R_{\text{GEN}}= 24 \Omega$ | | 18 | 23 | nS |
| t_r | Rise Time | | | 120 | 180 | |
| t_{off} | Turn-Off Time | | | 80 | 120 | |
| t_f | Fall Time | | | 60 | 165 | |

DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

| | | | | | |
|-----------------|------------------------------------|-------------------------------------------------|--|------|---|
| I_s | Drain-Source Diode Forward Current | | | 40 | A |
| V_{SD} | Drain-Source Diode Forward Voltage | $I_s = 25\text{A}, V_{\text{GS}} = 0 \text{ V}$ | | 0.93 | V |