



# CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

## SURFACE MOUNT N-Channel Enhancement Mode Field Effect Transistor VOLTAGE 30 Volts CURRENT 65 Ampere

CHM73A3PAGP

### APPLICATION



- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.

### FEATURE


- \* Small package. (TO-252A)
- \* Super high dense cell design for extremely low  $R_{DS(ON)}$ .
- \* High power and current handling capability.

### CONSTRUCTION

- \* N-Channel Enhancement

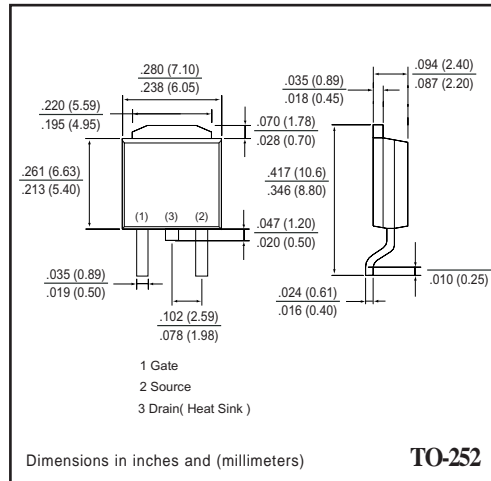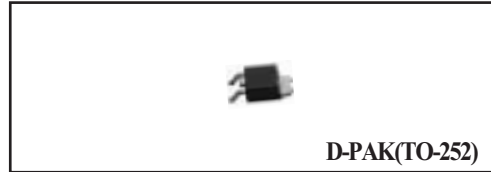

### CIRCUIT



### Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	CHM73A3PAGP	Units
$V_{DSS}$	Drain-Source Voltage	30	V
$V_{GSS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Maximum Drain Current - Continuous	65	A
	- Pulsed (Note 3)	350	
$P_D$	Maximum Power Dissipation at $T_c = 25^\circ\text{C}$	60	W
$T_J$	Operating Temperature Range	-55 to 150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$

- Note : 1. Surface Mounted on FR4 Board ,  $t \leq 10\text{sec}$   
 2. Pulse Test , Pulse width  $\leq 300\mu\text{s}$  , Duty Cycle  $\leq 2\%$   
 3. Repetitive Rating , Pulse width limited by maximum junction temperature  
 4. Guaranteed by design , not subject to production trsting

### Thermal characteristics

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	50	$^\circ\text{C/W}$
-----------------	--	----	--------------------

2006-02

## RATING CHARACTERISTIC CURVES ( CHM73A3PAGP )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

### OFF CHARACTERISTICS

$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	30			V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V}$			1	$\mu\text{A}$
$I_{GSSF}$	Gate-Body Leakage	$V_{GS} = 20\text{ V}, V_{DS} = 0\text{ V}$			+100	nA
$I_{GSSR}$	Gate-Body Leakage	$V_{GS} = -20\text{ V}, V_{DS} = 0\text{ V}$			-100	nA

### ON CHARACTERISTICS (Note 2)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$	1		3	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=30\text{A}$		7.8	9	m $\Omega$
		$V_{GS}=4.5\text{V}, I_D=30\text{A}$		10	13	
$g_{FS}$	Forward Transconductance	$V_{DS} = 10\text{V}, I_D = 15\text{A}$		20		S

### SWITCHING CHARACTERISTICS (Note 4)

$Q_g$	Total Gate Charge	$V_{DS}=15\text{V}, I_D=20\text{A}$ $V_{GS}=4.5\text{V}$		24	30	nC
$Q_{gs}$	Gate-Source Charge			9.1		
$Q_{gd}$	Gate-Drain Charge			7.5		
$t_{on}$	Turn-On Time	$V_{DD}= 15\text{V}$ $I_D=1\text{A}, V_{GS}= 10\text{ V}$ $R_{GEN}= 6\ \Omega$		19	23	nS
$t_r$	Rise Time			6.8	12	
$t_{off}$	Turn-Off Time			71	128	
$t_f$	Fall Time			12.8	17.5	

### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

$I_S$	Drain-Source Diode Forward Current			20	A
$V_{SD}$	Drain-Source Diode Forward Voltage	$I_S = 20\text{A}, V_{GS} = 0\text{ V}$		1.5	V