



**CHENMKO ENTERPRISE CO., LTD**

**SURFACE MOUNT**

**N-Channel Enhancement Mode Field Effect Transistor**

**VOLTAGE 30 Volts CURRENT 6.2 Ampere**

**CHM9436AJGP**

#### APPLICATION

- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.


#### FEATURE

- \* Small flat package. (SO-8 )
- \* High density cell design for extremely low R<sub>DSON</sub>.
- \* Rugged and reliable.
- \* High saturation current capability.


#### CONSTRUCTION

- \* N-Channel Enhancement

#### CIRCUIT



**SO-8**

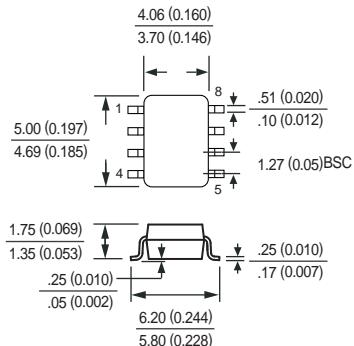

Dimensions in millimeters

**SO-8**

#### Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	CHM9436AJGP	Units
V <sub>DSS</sub>	Drain-Source Voltage	30	V
V <sub>GSS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub>	Maximum Drain Current - Continuous	6.2	A
	- Pulsed (Note 3)	25	
P <sub>D</sub>	Maximum Power Dissipation	2500	mW
T <sub>J</sub>	Operating Temperature Range	-55 to 150	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to 150	°C

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

#### Thermal characteristics

R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient (Note 1)	50	°C/W
2008-01			

## ELECTRICAL CHARACTERISTIC ( CHM9436AJGP )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

### OFF CHARACTERISTICS

$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30			V
$I_{\text{DS}(\text{SS})}$	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 24 \text{ V}, V_{\text{GS}} = 0 \text{ V}$			1	$\mu\text{A}$
$I_{\text{GSSF}}$	Gate-Body Leakage	$V_{\text{GS}} = 20\text{V}, V_{\text{DS}} = 0 \text{ V}$			+100	nA
$I_{\text{GSSR}}$	Gate-Body Leakage	$V_{\text{GS}} = -20\text{V}, V_{\text{DS}} = 0 \text{ V}$			-100	nA

### ON CHARACTERISTICS (Note 2)

$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250 \mu\text{A}$	1		3	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}, I_D=6.2\text{A}$		30	38	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_D=5.6\text{A}$		40	52	
$g_{\text{FS}}$	Forward Transconductance	$V_{\text{DS}} = 10\text{V}, I_D = 6.2\text{A}$		7.0		S

### Dynamic Characteristics

$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		400		pF
$C_{\text{oss}}$	Output Capacitance			180		
$C_{\text{rss}}$	Reverse Transfer Capacitance			55		

### SWITCHING CHARACTERISTICS (Note 4)

$Q_g$	Total Gate Charge	$V_{\text{DS}}=15\text{V}, I_D=6.2\text{A}$ $V_{\text{GS}}=10\text{V}$		12	17	nC
$Q_{\text{gs}}$	Gate-Source Charge			2		
$Q_{\text{gd}}$	Gate-Drain Charge			3		
$t_{\text{on}}$	Turn-On Time	$V_{\text{DD}}= 10\text{V}$ $I_D = 1.0\text{A}, V_{\text{GS}} = 10 \text{ V}$ $R_{\text{GEN}}= 6 \Omega$		23	45	nS
$t_r$	Rise Time			14	35	
$t_{\text{off}}$	Turn-Off Time			45	90	
$t_f$	Fall Time			10	30	


### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

$I_s$	Drain-Source Diode Forward Current	(Note 1)			2.5	A
$V_{\text{SD}}$	Drain-Source Diode Forward Voltage	$I_s = 2.5\text{A}, V_{\text{GS}} = 0 \text{ V}$ (Note 2)			1.3	V


## RATING CHARACTERISTIC CURVES ( CHM9436AJGP )

### Typical Electrical Characteristics


**Figure 1. Output Characteristics**

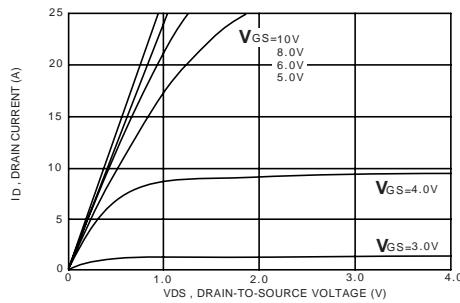


**Figure 2. Transfer Characteristics**

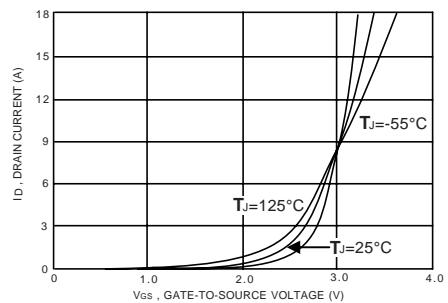

**Figure 3. Gate Charge**

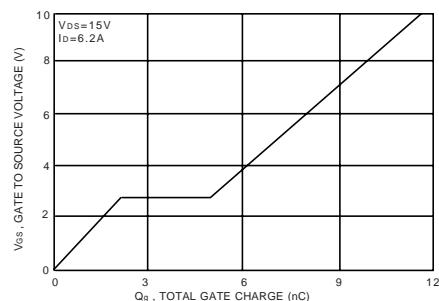

**Figure 4. On-Resistance Variation with Temperature**

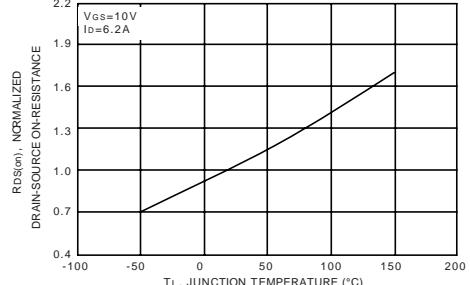

**Figure 5. Gate Threshold Variation with Temperature**

