



PNP BD132

SILICON PLANAR EPITAXIAL POWER TRANSISTORS

The BD132 are PNP transistors mounted in Jedec TO-126 plastic package.
 Medium power applications.
 PNP complements are BD131
 Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit
$-V_{CEO}$	Collector-Emitter Voltage	45	V
$-V_{CBO}$	Collector-Base Voltage	45	V
$-V_{EBO}$	Emitter-Base Voltage	4	V
I_C	Collector Current	$-I_C$	3
		$-I_{CM}$	6
I_B	Base current (peak value)	$-I_{BM}$	0.5
	Reverse base current (peak value)	$-I_{BM}$	0.5
P_T	Total power Dissipation	@ $T_{mb} = 60^\circ\text{C}$	15
T_J	Junction Temperature		150
T_{Stg}	Storage Temperature		-65 to +150

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJ-mb}	Thermal Resistance, Junction to mounting base	6	K/W

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit
$-I_{CBO}$	Collector cut-off current	$I_E=0, -V_{CB}=40\text{ V}$	-	-	5	μA
		$I_E=0, -V_{CB}=40\text{ V}, T_J=150^\circ\text{C}$	-	-	500	
$-I_{EBO}$	Emitter cut-off current	$I_C=0, -V_{EB}=3\text{ V}$	-	-	5	μA
$-V_{CE(SAT)}$	Collector-Emitter saturation Voltage	$-I_C=0.5\text{ A}, -I_B=50\text{ mA}$	-	-	0.3	V
		$-I_C=2.0\text{ A}, -I_B=200\text{ mA}$	-	-	1.2	
$-V_{BE(SAT)}$	Base-Emitter saturation Voltage	$-I_C=0.5\text{ A}, -I_B=50\text{ mA}$	-	-	0.7	V
		$-I_C=2.0\text{ A}, -I_B=200\text{ mA}$	-	-	1,5	
h_{FE}	DC Current Gain	$-V_{CE}=12\text{ V}, -I_C=500\text{ mA}$	40	-	-	
		$-V_{CE}=1\text{ V}, -I_C=2\text{ A}$	20	-	-	

PNP BD132

MECHANICAL DATA CASE TO-126

	DIMENSIONS	
	min	max
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 typ.	
F	0.49	0.75
G	4.4 typ.	
L	15.7 typ.	
M	1.27 typ.	
N	3.75 typ.	
P	3.0	3.2
S	2.54 typ.	

Pin 1 :	Emitter
Pin 2 :	Collector
Pin 3 :	Base

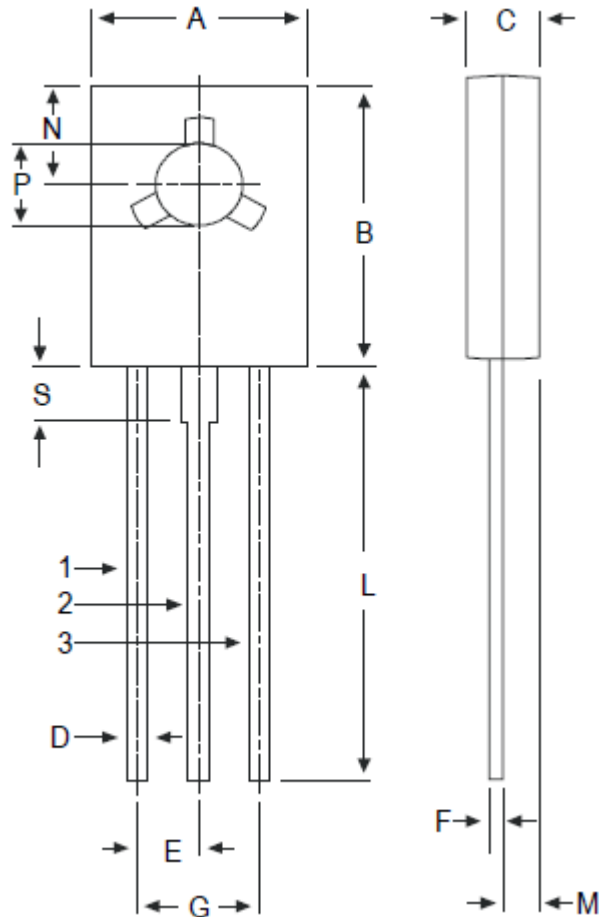

Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.