

PNP TIP34-A-B-C

SILICON POWER TRANSISTORS

They are PNP power transistors mounted in jedec TO-3PN. They are intended for use in general purpose power amplifier and switching applications.

NPN complements are TIP33-A-B-C

Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit	
V_{CBO}	Collector-Base Voltage	TIP34	-40	V
		TIP34A	-60	
		TIP34B	-80	
		TIP34C	-100	
V_{CEO}	Collector-Emitter Voltage	TIP34	-40	V
		TIP34A	-60	
		TIP34B	-80	
		TIP34C	-100	
V_{EBO}	Emitter-Base Voltage	TIP34	-5	V
		TIP34A		
		TIP34B		
		TIP34C		
I_C	Collector Current	TIP34	-10	A
		TIP34A		
		TIP34B		
		TIP34C		
I_{CM}	Collector Peak Current	TIP34	-15	A
		TIP34A		
		TIP34B		
		TIP34C		

PNP TIP34-A-B-C

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
I_B	Base Current	TIP34	-3	A
		TIP34A		
		TIP34B		
		TIP34C		
P_c	Power Dissipation	@ $T_c < 25^\circ$	80	Watts
		TIP34		
		TIP34A		
		TIP34B		
		TIP34C		
		@ $T_a < 25^\circ$	3.5	
		TIP34		
		TIP34A		
TIP34B				
TIP34C				
T_J	Junction Temperature	TIP34	150	$^\circ\text{C}$
		TIP34A		
		TIP34B		
		TIP34C		
T_s	Storage Temperature range	TIP34	-65 to +150	$^\circ\text{C}$
		TIP34A		
		TIP34B		
		TIP34C		

THERMAL CHARACTERISTICS

Symbol	Ratings		Value	Unit
R_{thJ-MB}	From junction to mounting base	TIP34	1.56	$^\circ\text{C/W}$
		TIP34A		
		TIP34B		
		TIP34C		
R_{thJ-A}	From junction to ambient in free air	TIP34	35.7	$^\circ\text{C/W}$
		TIP34A		
		TIP34B		
		TIP34C		

PNP TIP34-A-B-C

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit		
I_{CES}	Collector Cutoff Current	$I_E = 0, V_{CE} = -V_{CEO}$	TIP34	-	-	-0.4	Ma	
			TIP34A					
			TIP34B					
			TIP34C					
I_{CEO}	Collector Cutoff Current	$I_B = 0, V_{CE} = -30V$	TIP34	-	-	-0.7	mA	
			TIP34A					
		$I_B = 0, V_{CE} = -60V$	TIP34B	-	-	-0.7		
			TIP34C					
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5 V$ $I_C = 0$	TIP34	-	-	-1	mA	
			TIP34A					
			TIP34B					
			TIP34C					
V_{CEO}	Collector-Emitter Breakdown Voltage (*)	$I_C = -30 mA$ $I_B = 0$	TIP34	-40	-	-	V	
			TIP34A	-60	-	-		
			TIP34B	-80	-	-		
			TIP34C	-100	-	-		
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = -3 A$ $I_B = -300 mA$	TIP34	-	-	-1	V	
			TIP34A					
			TIP34B					
			TIP34C					
			$I_C = -10 A$ $I_B = -2.5 mA$	TIP34	-	-	-4	V
				TIP34A				
				TIP34B				
				TIP34C				
$V_{BE(on)}$	Base-Emitter Voltage (*)	$I_C = -3 A$ $V_{CE} = -4 V$	TIP34	-	-	-1.6	V	
			TIP34A					
			TIP34B					
			TIP34C					
			$I_C = -10 A$ $V_{CE} = -4 V$	TIP34	-	-	-3	V
				TIP34A				
				TIP34B				
				TIP34C				
h_{FE}	DC Current Gain (*)	$V_{CE} = -4 V$ $I_C = -1 A$	TIP34	40	-	-	-	
			TIP34A					
			TIP34B					
			TIP34C					
			$V_{CE} = -4 V$ $I_C = -3 A$	TIP34	20	-		100
				TIP34A				
				TIP34B				
				TIP34C				

(*) Pulse Width $\approx 300 \mu s$, Duty Cycle $\angle 2.0\%$

PNP TIP34-A-B-C

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
f_T	Current Gain-Bandwidth Product	$V_{CE} = -10\text{ V}$ $I_C = -0.5\text{ A}$ $f = 1\text{ kHz}$	TIP34	3	-	-	MHz
			TIP34A				
			TIP34B				
			TIP34C				

MECHANICAL DATA CASE TO3PN Non Isolated Plastic Package

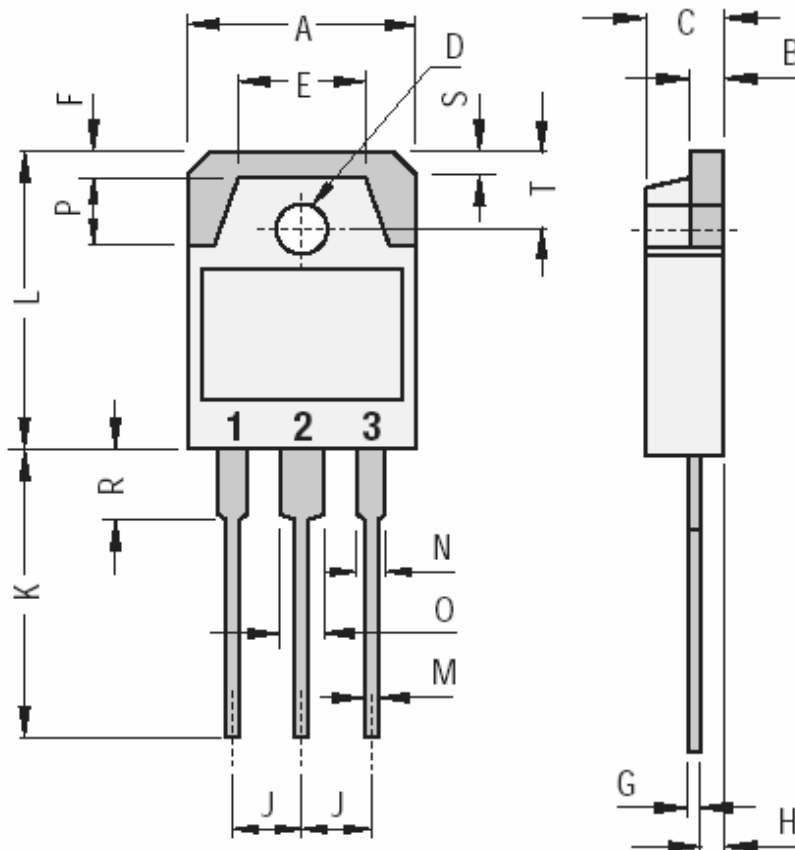

DIMENSIONS (mm)		
	Min.	Max.
A	15.20	16.00
B	1.90	2.10
C	4.60	5.00
D	3.10	3.30
E		9.60
F		2.00
G	0.35	0.55
H		1.40
J	5.35	5.55
K	20.00	
L	19.60	20.20
M	0.95	1.25
N		2.00
O		3.00
P		4.00
R		4.00
S		1.80
T	4.80	5.20

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Case :	Collector

September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.