

MSAER30N20A  
MSAFR30N20A

### Features

- Ultrafast rectifier in parallel with the body diode (MSAE type only)
- Rugged polysilicon gate cell structure
- Increased Unclamped Inductive Switching (UIS) capability
- Hermetically sealed, surface mount power package
- Low package inductance
- Very low thermal resistance
- Reverse polarity available upon request


200 Volts  
30 Amps  
85 mΩ

N-CHANNEL  
ENHANCEMENT MODE  
POWER MOSFET

### Maximum Ratings @ 25°C (unless otherwise specified)

DESCRIPTION	SYMBOL	MAX.	UNIT
Drain-to-Source Breakdown Voltage (Gate Shorted to Source) @ $T_J \geq 25^\circ\text{C}$	$BV_{DSS}$	200	Volts
Drain-to-Gate Breakdown Voltage @ $T_J \geq 25^\circ\text{C}$ , $R_{GS} = 1\text{ M}\Omega$	$BV_{DGR}$	200	Volts
Continuous Gate-to-Source Voltage	$V_{GS}$	+/-20	Volts
Transient Gate-to-Source Voltage	$V_{GSM}$	+/-30	Volts
Continuous Drain Current  100°C	$I_{D25}$ $I_{D100}$	30 19	Amps
Peak Drain Current, pulse width limited by $T_{Jmax}$	$I_{DM}$	120	Amps
Repetitive Avalanche Current	$I_{AR}$	30	Amps
Repetitive Avalanche Energy	$E_{AR}$	15	mJ
Single Pulse Avalanche Energy	$E_{AS}$	200	mJ
Voltage Rate of Change of the Recovery Diode @ $I_S \leq I_{DM}$ , $di/dt \leq 100\text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$	$dv/dt$	5.0	V/ns
Power Dissipation	$P_D$	300	Watts
Junction Temperature Range	$T_J$	-55 to +150	°C
Storage Temperature Range	$T_{stg}$	-55 to +150	°C
Continuous Source Current (Body Diode)	$I_S$	30	Amps
Pulse Source Current (Body Diode)	$I_{SM}$	120	Amps
Thermal Resistance, Junction to Case	$\theta_{JC}$	0.4	°C/W

### Mechanical Outline

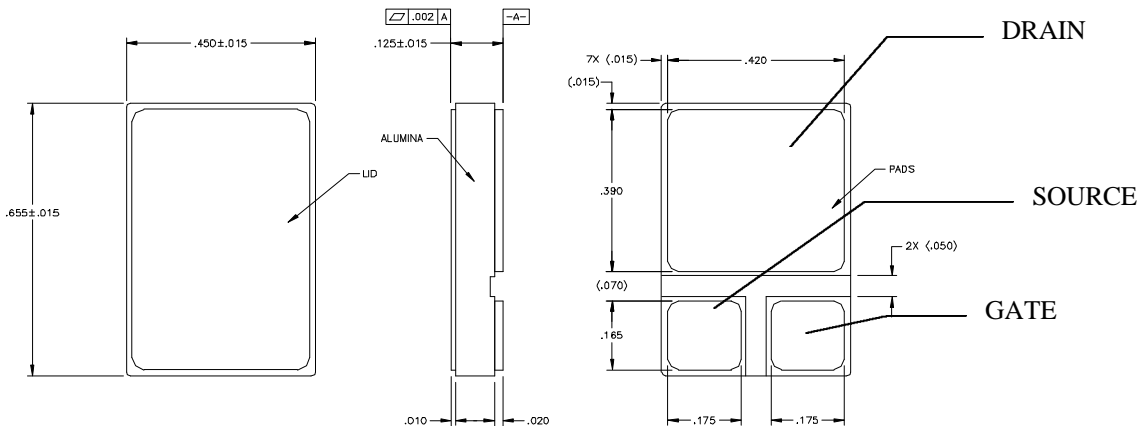

# MSAER30N20A MSAFR30N20A

## Electrical Parameters @ 25°C (unless otherwise specified)

DESCRIPTION	SYMBOL	CONDITIONS	MIN	TYP.	MAX	UNIT
Drain-to-Source Breakdown Voltage (Gate Shorted to Source)	$BV_{DSS}$	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	200			V
Temperature Coefficient of the Drain-to-Source Breakdown Voltage	$\Delta BV_{DSS}/\Delta T_J$			0.29		V/°C
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 1\ \text{mA}$	2.0		4.0	V
Gate-to-Source Leakage Current	$I_{GSS}$	$V_{GS} = \pm 20\text{V}_{DC}, V_{DS} = 0\ \text{T}_J = 25^\circ\text{C}$ $\text{T}_J = 125^\circ\text{C}$			$\pm 100$ $\pm 200$	nA
Drain-to-Source Leakage Current (Zero Gate Voltage Drain Current)	$I_{DSS}$	$V_{DS} = 0.8 \cdot BV_{DSS}\ \text{T}_J = 25^\circ\text{C}$ $V_{GS} = 0\ \text{T}_J = 125^\circ\text{C}$			25 250	$\mu\text{A}$
Static Drain-to-Source On-State Resistance (1)	$R_{DS(on)}$	$V_{GS} = 10\text{V}, I_D = 20\text{A}\ \text{T}_J = 25^\circ\text{C}$ $I_D = 30\text{A}\ \text{T}_J = 25^\circ\text{C}$ $I_D = 20\text{A}\ \text{T}_J = 125^\circ\text{C}$		1.5	0.085 0.090	$\Omega$
Forward Transconductance (1)	$g_{fs}$	$V_{DS} \geq 15\ \text{V}; I_D = 20\ \text{A}$	9			S
Input Capacitance Output Capacitance Reverse Transfer Capacitance	$C_{iss}$ $C_{oss}$ $C_{rss}$	$V_{GS} = 0\ \text{V}, V_{DS} = 25\ \text{V}, f = 1\ \text{MHz}$		3500 700 110		pF
Turn-on Delay Time Rise Time Turn-off Delay Time Fall Time	$T_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$	$V_{GS} = 10\ \text{V}, V_{DS} = 100\ \text{V},$ $I_D = 30\ \text{A}, R_G = 2.35\ \Omega$			35 190 170 130	ns
Total Gate Charge Gate-to-Source Charge Gate-to-Drain (Miller) Charge	$Q_{g(on)}$ $Q_{gs}$ $Q_{gd}$	$V_{GS} = 10\ \text{V}, V_{DS} = 100\text{V}, I_D = 30\text{A}$	55 8 30		115 22 60	nC
Body Diode Forward Voltage (1)	$V_{SD}$	$I_F = I_S, V_{GS} = 0\ \text{V}$			1.2 1.9	V
Reverse Recovery Time (Body Diode)	$t_{rr}$	$I_F = 10\ \text{A},$ $-di/dt = 100\ \text{A}/\mu\text{s},$			50 950	ns
Reverse Recovery Charge	$Q_{rr}$	$I_F = 10\ \text{A},$ $di/dt = 100\ \text{A}/\mu\text{s},$			tbd 9	$\mu\text{C}$

### Notes

- (1) Pulse test,  $t \leq 300\ \mu\text{s}$ , duty cycle  $\delta \leq 2\%$
- (2) Microsemi Corp. does not manufacture the mosfet die; contact company for details.

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**