

# BZD27-CxxA Series


## VOLTAGE REGULATOR DIODES

### FEATURES :

- \* High maximum operating temperature
- \* Low leakage current
- \* Excellent stability
- \* Zener working voltage range: 3.6 to 270 V for 46 types
- \* Transient suppressor stand-off voltage range: 6.2 to 430 V for 45 types
- \* **Pb / RoHS Free**

### MECHANICAL DATA :

- \* Case : SMA Molded plastic
- \* Epoxy : UL94V-0 rate flame retardant
- \* Lead : Lead Formed for Surface Mount
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.067 gram

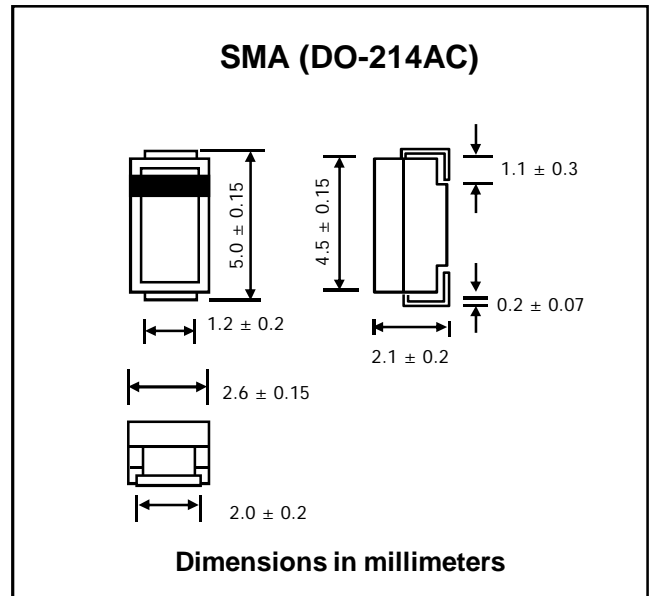

### MAXIMUM RATINGS

Parameter	Symbol	Condition	Min.	Max.	Unit
Total Power dissipation BZD27-C3V6A to BZD27-C6V8A BZD27-C7V5A to BZD27-C510A	$P_{tot}$	$T_{tp} = 105\text{ }^{\circ}\text{C}$ ; see Fig. 1 and 2	-	1.7 2.3	W
Total Power dissipation BZD27-C3V6A to BZD27-C6V8A BZD27-C7V5A to BZD27-C510A	$P_{tot}$	PCB mounted $T_{amb} = 60\text{ }^{\circ}\text{C}$ , see Fig. 1 $T_{amb} = 55\text{ }^{\circ}\text{C}$ , see Fig. 2	-	0.8 0.8	W
Non-repetitive peak reverse power dissipation	$P_{ZSM}$	$t_p = 100\text{ }\mu\text{s}$ ; square pulse; $T_j = 25\text{ }^{\circ}\text{C}$ prior to surge; see Fig. 5	-	300	W
Non-repetitive peak reverse power dissipation (BZD27-C7V5A to -C510A)	$P_{RSM}$	10/1000 $\mu\text{s}$ exponential pulse (see Fig. 5) $T_j = 25\text{ }^{\circ}\text{C}$ prior to surge	-	150	W
Forward voltage BZD27-C3V6A to BZD27-C220A ; see Fig. 3 BZD27-C240A to BZD27-C510A	$V_F$	$I_F = 0.2\text{ A}$ ; $T_j = 25\text{ }^{\circ}\text{C}$	- -	1.2 2.2	V
Junction and Storage Temperature Range BZD27-C3V6A to BZD27-C6V8A BZD27-C7V5A to BZD27-C510A	$T_J, T_{STG}$		-65 -65	+175 +150	$^{\circ}\text{C}$

### THERMAL CHARACTERISTICS

Parameter	Symbol	Condition	Value	Unit
Thermal resistance from junction to tie-point BZD27-C3V6A to BZD27-C6V8A BZD27-C7V5A to BZD27-C510A	$\bar{R}_{th\ j-tp}$		41 20	K/W
Thermal resistance from junction to ambient BZD27-C3V6A to BZD27-C6V8A BZD27-C7V5A to BZD27-C510A	$R_{th\ j-a}$	Note 1	144 119	K/W

Note : (1) Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer  $\geq 40\text{ }\mu\text{m}$  on an must space.



## ELECTRICAL CHARACTERISTICS

### Per type when used as voltage regulator diodes

Rating at Tj = 25 °C unless otherwise specified

Type No.	Working Voltage			Differential Resistance		Temperature Coefficient		Test Current	Maximum Reverse Leakage Current	
	V <sub>Z</sub> @ I <sub>Z</sub>			r <sub>diff</sub> (Ω) at I <sub>Z</sub>		S <sub>Z</sub> (%/K) at I <sub>Z</sub>		I <sub>Z</sub>	I <sub>R</sub> @ V <sub>R</sub>	
	Min.	Nom.	Max.	Typ.	Max.	Min.	Max.	(mA)	(μA)	(V)
BZD27-C3V6A	3.4	3.6	3.8	4	8	-0.14	-0.04	100	100	1.0
BZD27-C3V9A	3.7	3.9	4.1	4	8	-0.14	-0.04	100	50	1.0
BZD27-C4V3A	4.0	4.3	4.6	4	7	-0.12	-0.02	100	25	1.0
BZD27-C4V7A	4.4	4.7	5.0	3	7	-0.10	0.00	100	10	1.0
BZD27-C5V1A	4.8	5.1	5.4	3	6	-0.08	-0.02	100	5	1.0
BZD27-C5V6A	5.2	5.6	6.0	2	4	-0.04	0.04	100	10	2.0
BZD27-C6V2A	5.8	6.2	6.6	2	3	-0.01	0.06	100	5	2.0
BZD27-C6V8A	6.4	6.8	7.2	1	3	0.00	0.07	100	10	3.0
BZD27-C7V5A	7.0	7.5	7.9	1	2	0.00	0.07	100	50	3.0
BZD27-C8V2A	7.7	8.2	8.7	1	2	0.03	0.08	100	10	3.0
BZD27-C9V1A	8.5	9.1	9.6	2	4	0.03	0.08	50	10	5.0
BZD27-C10A	9.4	10	10.6	2	4	0.05	0.09	50	7	7.5
BZD27-C11A	10.4	11	11.6	4	7	0.05	0.10	50	4	8.2
BZD27-C12A	11.4	12	12.7	4	7	0.05	0.10	50	3	9.1
BZD27-C13A	12.4	13	14.1	5	10	0.05	0.10	50	2	10
BZD27-C15A	13.8	15	15.6	5	10	0.05	0.10	50	1	11
BZD27-C16A	15.3	16	17.1	6	15	0.05	0.11	25	1	12
BZD27-C18A	16.8	18	19.1	6	15	0.06	0.11	25	1	13
BZD27-C20A	18.8	20	21.2	6	15	0.06	0.11	25	1	15
BZD27-C22A	20.8	22	23.3	6	15	0.06	0.11	25	1	16
BZD27-C24A	22.8	24	25.6	7	15	0.06	0.11	25	1	18
BZD27-C27A	25.1	27	28.9	7	15	0.06	0.11	25	1	20
BZD27-C30A	28	30	32	8	15	0.06	0.11	25	1	22
BZD27-C33A	31	33	35	8	15	0.06	0.11	25	1	24
BZD27-C36A	34	36	38	21	40	0.06	0.11	10	1	27
BZD27-C39A	37	39	41	21	40	0.06	0.11	10	1	30
BZD27-C43A	40	43	46	24	45	0.07	0.12	10	1	33
BZD27-C47A	44	47	50	24	45	0.07	0.12	10	1	36
BZD27-C51A	48	51	54	25	60	0.07	0.12	10	1	39
BZD27-C56A	52	56	60	25	60	0.07	0.12	10	1	43
BZD27-C62A	58	62	66	25	80	0.08	0.13	10	1	47
BZD27-C68A	64	68	72	25	80	0.08	0.13	10	1	51
BZD27-C75A	70	75	79	30	100	0.08	0.13	10	1	56
BZD27-C82A	77	82	87	30	100	0.08	0.13	10	1	62
BZD27-C91A	85	91	96	60	200	0.09	0.13	5	1	68
BZD27-C100A	94	100	106	60	200	0.09	0.13	5	1	75
BZD27-C110A	104	110	116	80	250	0.09	0.13	5	1	82
BZD27-C120A	114	120	127	80	250	0.09	0.13	5	1	91
BZD27-C130A	124	130	141	110	300	0.09	0.13	5	1	100
BZD27-C150A	138	150	156	130	300	0.09	0.13	5	1	110
BZD27-C160A	153	160	171	150	350	0.09	0.13	5	1	120
BZD27-C180A	168	180	191	180	400	0.09	0.13	5	1	130
BZD27-C200A	188	200	212	200	500	0.09	0.13	5	1	150
BZD27-C220A	208	220	233	350	750	0.09	0.13	2	1	160
BZD27-C240A	228	240	256	400	850	0.09	0.13	2	1	180
BZD27-C270A	251	270	289	450	1000	0.09	0.13	2	1	200



## ELECTRICAL CHARACTERISTICS


### Per type when used as Transient suppressor diodes

Rating at Tj = 25 °C unless otherwise specified

Type No.	Reverse Breakdown Voltage	Temperature Coefficient		Test Current	Clamping Voltage		Maximum Reverse Leakage Current	
	$V_{(BR)R} @ I_{test}$ (V)	$S_Z$ (%/K) at $I_{test}$		$I_{test}$	$V_{(CL)R}$ (V)	at $I_{RSM}$	$I_R @ V_R$	
	Min.	Min.	Max.	(mA)	Max.	(A)	( $\mu$ A)	(V)
BZD27-C7V5A	7.0	0.00	0.07	100	11.3	13.3	1500	6.2
BZD27-C8V2A	7.7	0.03	0.08	100	12.3	12.2	1200	6.8
BZD27-C9V1A	8.5	0.03	0.08	50	13.3	11.3	100	7.5
BZD27-C10A	9.4	0.05	0.09	50	14.8	10.1	20	8.2
BZD27-C11A	10.4	0.05	0.10	50	15.7	9.6	5	9.1
BZD27-C12A	11.4	0.05	0.10	50	17.0	8.8	5	10
BZD27-C13A	12.4	0.05	0.10	50	18.9	7.9	5	11
BZD27-C15A	13.8	0.05	0.10	50	20.9	7.2	5	12
BZD27-C16A	15.3	0.06	0.11	25	22.9	6.6	5	13
BZD27-C18A	16.8	0.06	0.11	25	25.6	5.9	5	15
BZD27-C20A	18.8	0.06	0.11	25	28.9	5.3	5	16
BZD27-C22A	20.8	0.06	0.11	25	31.0	4.8	5	18
BZD27-C24A	22.8	0.06	0.11	25	33.8	4.4	5	20
BZD27-C27A	25.1	0.06	0.11	25	38.1	3.9	5	22
BZD27-C30A	28	0.06	0.11	25	42.2	3.6	5	24
BZD27-C33A	31	0.06	0.11	25	46.2	3.2	5	27
BZD27-C36A	34	0.06	0.11	10	50.1	3.0	5	30
BZD27-C39A	37	0.06	0.11	10	54.1	2.8	5	33
BZD27-C43A	40	0.07	0.12	10	60.7	2.5	5	36
BZD27-C47A	44	0.07	0.12	10	65.5	2.6	5	39
BZD27-C51A	48	0.07	0.12	10	70.8	2.1	5	43
BZD27-C56A	52	0.07	0.12	10	78.6	1.9	5	47
BZD27-C62A	58	0.08	0.13	10	86.5	1.7	5	51
BZD27-C68A	64	0.08	0.13	10	94.4	1.6	5	56
BZD27-C75A	70	0.08	0.13	10	103.5	1.5	5	62
BZD27-C82A	77	0.08	0.13	10	114.0	1.3	5	68
BZD27-C91A	85	0.09	0.13	5	126	1.2	5	75
BZD27-C100A	94	0.09	0.13	5	139	1.1	5	82
BZD27-C110A	104	0.09	0.13	5	152	1.0	5	91
BZD27-C120A	114	0.09	0.13	5	167	0.90	5	100
BZD27-C130A	124	0.09	0.13	5	185	0.81	5	110
BZD27-C150A	138	0.09	0.13	5	204	0.73	5	120
BZD27-C160A	153	0.09	0.13	5	224	0.67	5	130
BZD27-C180A	168	0.09	0.13	5	249	0.60	5	150
BZD27-C200A	188	0.09	0.13	5	276	0.54	5	160
BZD27-C220A	208	0.09	0.13	2	305	0.50	5	180
BZD27-C240A	228	0.09	0.13	2	336	0.45	5	200
BZD27-C270A	251	0.09	0.13	2	380	0.40	5	220
BZD27-C300A	280	0.09	0.13	2	419	0.36	5	240
BZD27-C330A	310	0.09	0.13	2	459	0.33	5	270
BZD27-C360A	340	0.09	0.13	2	498	0.30	5	300
BZD27-C390A	370	0.09	0.13	2	537	0.28	5	330
BZD27-C430A	400	0.09	0.13	2	603	0.25	5	360
BZD27-C470A	440	0.09	0.13	2	655	0.23	5	390
BZD27-C510A	480	0.09	0.13	2	707	0.21	5	430


**RATING AND CHARACTERISTIC CURVES ( BZD27-CxxA Series )**

**Fig.1 - Maximum total power dissipation as a function of temperature.**

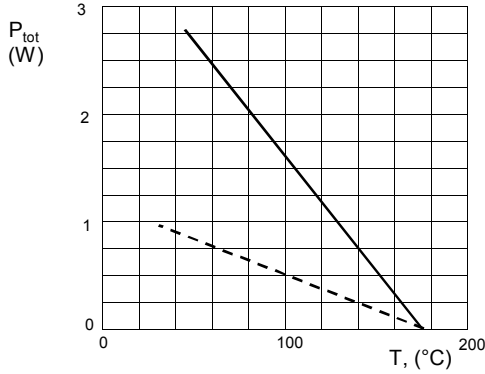


Types : BZD27-C3V6A to BZD27-C6V8A  
 Solid line: tie-point temperature  
 Dotted line: ambient temperature

**Fig.2 - Maximum total power dissipation as a function of temperature.**

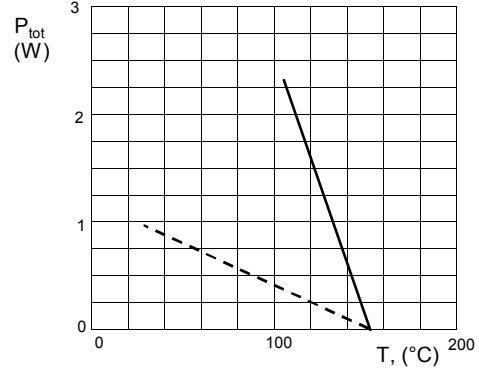


Types : BZD27-C7V5A to BZD27-C510A  
 Solid line: tie-point temperature  
 Dotted line: ambient temperature

**Fig. 3 - Forward current as a function of forward voltage; typical values.**

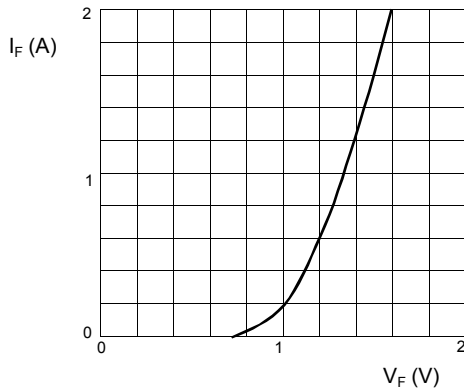

**Fig.4 - Non-Repetitive peak reverse current pulse definition**

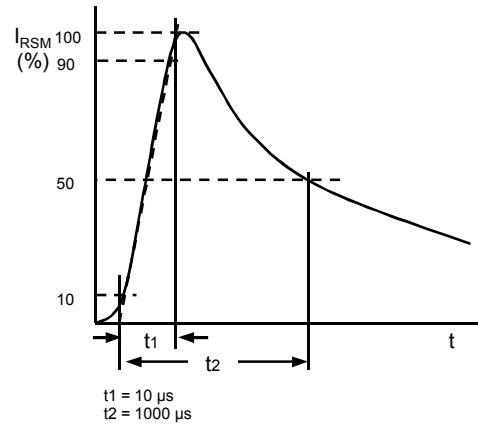

**Fig.5 - Maximum non-repetitive peak reverse power dissipation as a function of pulse duration (square pulse).**

