


**BTB04 TRIAC**

**MAIN FEATURES**

Symbol	value	unit
$I_{T(RMS)}$	4	A
$V_{DRM}/V_{RRM}$	BTB04-400	BTB04-600
	400	600
$I_{GT}$	5 to 25	mA

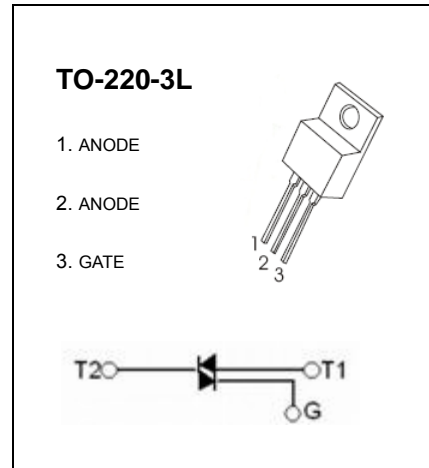

**DESCRIPTION**

The BTB04 triac family are high performance glass passivated PNP devices. These parts are suitable for general purpose applications where gate high sensitivity is required. Application on 4Q such as phase control and static switching.

**ABSOLUTE RATINGS (limiting values)**


Symbol	Parameter	Value	Unit
$I_{T(RMS)}$	RMS on-state current (360° conduction angle)	$T_C=95^{\circ}C$ 4	A
$I_{TSM}$	Non repetitive surge peak on-state current ( $T_j$ initial=25°C)	$tp=8.3ms$	42
		$tp=10ms$	40
$P_D$	Power dissipation	2	W
$R_{th\ j-a}$	Thermal Resistance. Junction to Ambient Air	62.5	°C/W
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state/reverse voltage	BTB04-400	BTB04-600
		400	600
$T_{stg} / T_j$	Storage and operating junction temperature range	-40 ~ +150	°C

**ELECTRICAL CHARACTERISTICS ( $T_a=25^{\circ}C$  unless otherwise specified)**

Symbol	Parameter	Test conditions	T	D	S	A	Unit
$I_{GT}$	Gate trigger current	$V_D=12V(DC), R_L=33\Omega$	MAX	5	5	10	10
			MAX	5	10	10	25
$V_{GT}$	Gate trigger voltage	$V_D=12V(DC), R_L=33\Omega$	MAX	1.5			V
$I_{H^*}$	Holding current	$I_T=100mA, \text{Gate open}$	MAX	15	15	25	25
$V_{TM^*}$	On-state voltage	$I_{TM}=5.5A, tp=380\mu s$	MAX	1.65			V
$I_{DRM}$ $I_{RRM}$	Rated repetitive peak off-state current	$V_{DRM}$ rated $V_{RRM}$ rated	MAX	0.01			mA

\*For either polarity of electrode  $A_2$  voltage with reference to electrode  $A_1$ .

# TO-220-3L Package Outline Dimensions

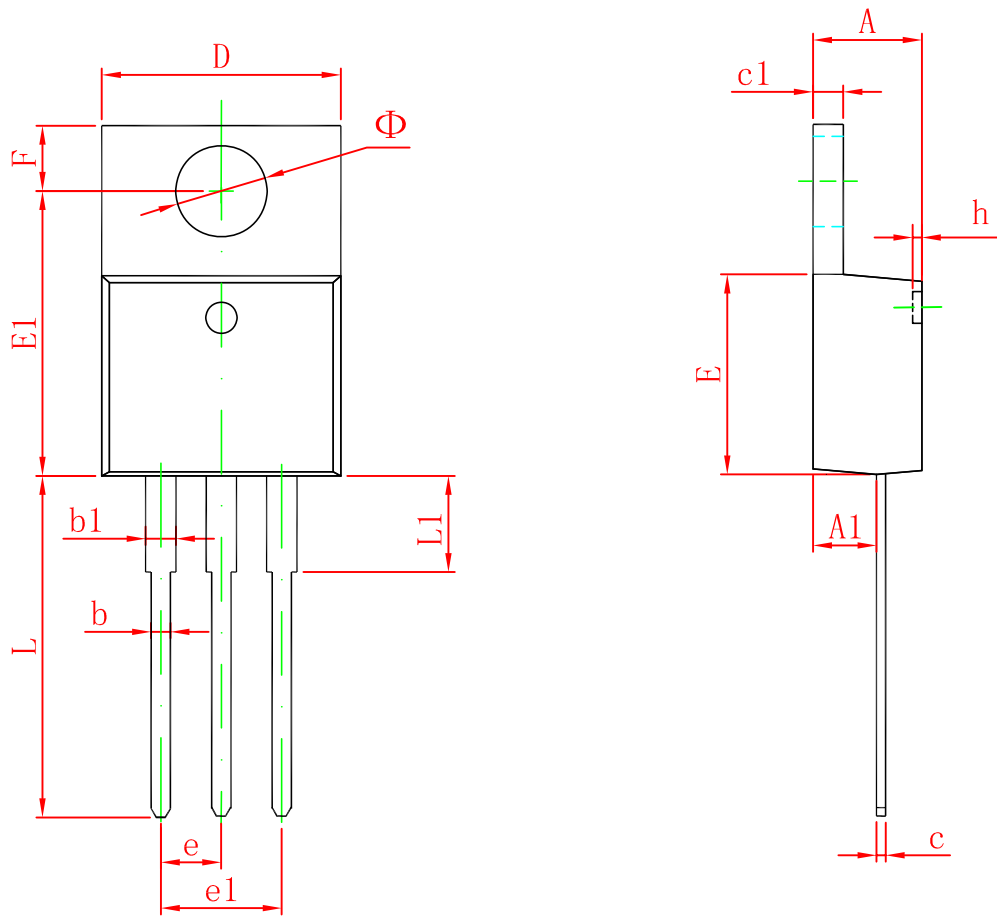

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
$\Phi$	3.735	3.935	0.147	0.155