



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

SURFACE MOUNT ZENER
SILICON PLANAR POWER ZENER DIODES
VOLTAGE RANGE 6.8V

CHEZ6V8BDWGP


FEATURE

- * High temperature soldering type.
- * ESD rating of class 3(>16 kV) per human body model.
- * Silicon planar zener diodes.
- * Silicon-oxide passivated junction.
- * Low temperature coefficient voltage
- * 380 mW Rating on FR-5 Board(1.0x0.75x0.062 in)


MECHANICAL

- * Void-free, Transfer-molded, Thermosetting plastic case
- * SC-88/SOT-363 Packaging.
- * Mounting position: Any.

CIRCUIT



SC-88/SOT-363



Dimensions in millimeters

SC-88/SOT-363

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	VALUE	UNITS
Zener Current (see Table "Characteristics")	-	-	-
Max. Steady State Power Dissipation @ TA=25°C	P _D	380	mW
Max. Operating Temperature Range	T _J	-65 to +150	°C
Storage Temperature Range	T _{STG}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS
Thermal Resistance Junction to Ambient	R _{θJA}	-	-	300	°C/W
Max. Instantaneous Forward Voltage at I _F = 10mA	V _F	-	-	0.9	Volts

NOTES : 1. The JEDEC type numbers listed have a standard tolerance on the normal zener voltage of ±10%, Suffix B=±5%.

2006-07

2. The zener impedance is derived from 1KHz AC voltage, which results when an AC current having an RMS value equal to 10% of DC zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve to eliminate unstable units.
3. Valid provided that electrodes at distance of 10mm from case are kept ambient temperature.
4. Measured under thermal equilibrium and DC test conditions.
5. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, I_{ZT}, per JEDEC registration.

ELECTRICAL CHARACTERISTICS (CHEZ6V8BDWGP)

TYPE	Zener voltage Vz (V) @ IzT			Test current IzT (mA)	Maximum Zener impedance			Maximum reverse leakage current		Type temperature coefficient at TA= 25°C θ_{VZ} (%/°C)	Maximum regulator current IzM (mA)
	Min	Nom	Max		ZzT at IzT (Ω)	Zzk (Ω)	at Izk (mA)	IR (uA)	at VR (V)		
	Volts	Volts	Volts								
CHEZ6V8BDWGP	6.400	6.8	7.200	5	30	300	0.5	1.0	5	+0.050	67

RATING CHARACTERISTIC CURVES (CHEZ6V8BDWGP)

FIG. 1 - TEMPERATURE COEFFICIENTS)
(TEMPERATURE RANGE 55°C TO +150°C)

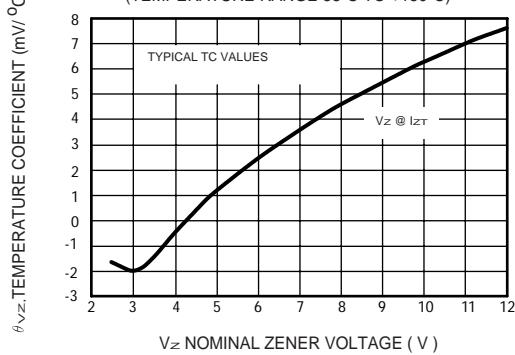


FIG. 2 - TEMPERATURE COEFFICIENTS)
(TEMPERATURE RANGE 55°C TO +150°C)

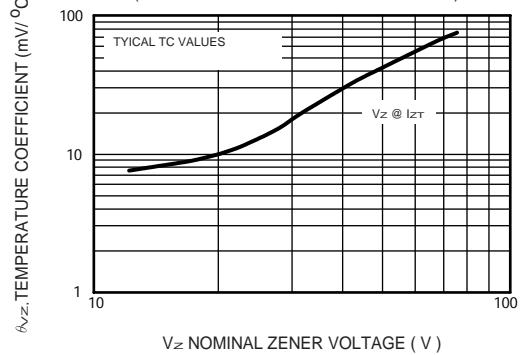


FIG. 3 - EFFECT OF ZENER VOLTAGE ON
ZENER IMPEDANCE

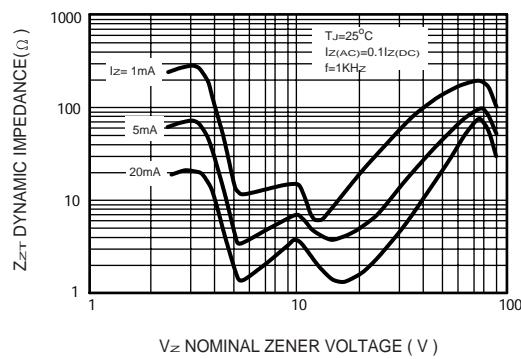


FIG. 4 - TYPICAL LEAKAGE CURRENT

