



MMBD101/MMBD352/MMBD354/MMBD355

SURFACE MOUNT HIGH FREQUENCY SCHOTTKY DIODE

VOLTAGE 7 Volt **POWER** 250 mWatt


SOT-23 Unit : inch(mm)

FEATURES

- Low Capacitance, Minimizing Insertion Losses in VHF Applications
- Low V_F : 0.5V (Typ) at $I_F = 10\text{mA}$
- Extremely Fast Switching Speed
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOT-23 plastic case.
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0003 ounces, 0.0084 grams

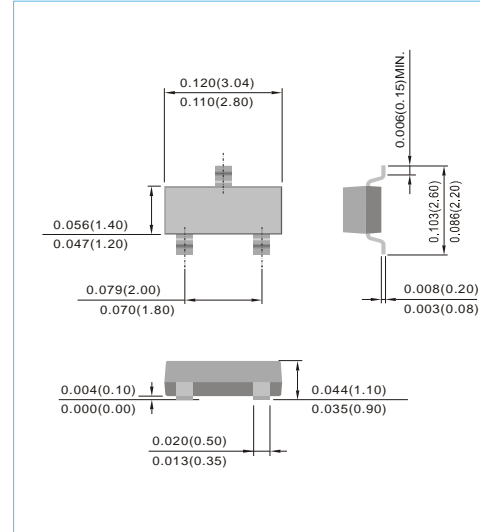

MAXIMUM RATINGS

Parameter	Symbol	MMBD101	MMBD352	MMBD354	MMBD355	Units
Marking Code	-	101	352	354	355	-
Reverse Voltage	V_R	7				V
Forward Power Dissipation	P_F	250				mW
Junction Temperature Range	T_J	-55 to +125				°C
Storage Temperature Range	T_{STG}	-55 to +150				°C
Circuit Figure	-	SINGLE	SERIES	COMMON CATHODE	COMMON ANODE	-

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	400	°C/W

NOTE :

1. FR-5 Board = 1X0.75X0.062 in.




Fig.14




Fig.17




Fig.16




Fig.15



MMBD101/MMBD352/MMBD354/MMBD355

ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=10\mu\text{A}$	7.0	10	-	V
Reverse Leakage Current	I_R	$V_R=3.0\text{V}$	-	-	0.25	μA
Forward Voltage	V_F	$I_F=10\text{mA}$	-	0.5	0.6	V
Total Capacitance	C_J	$f=1.0\text{MHz}$, $V_R=0\text{V}$	-	0.88	1.0	pF

ELECTRICAL CHARACTERISTICS CURVES

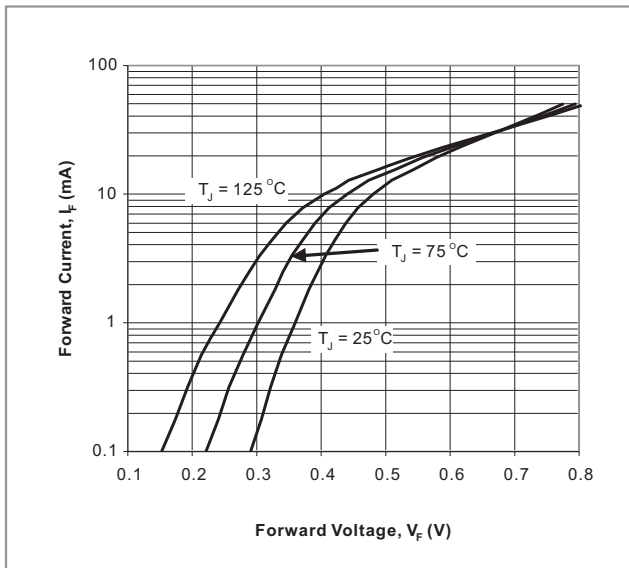


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

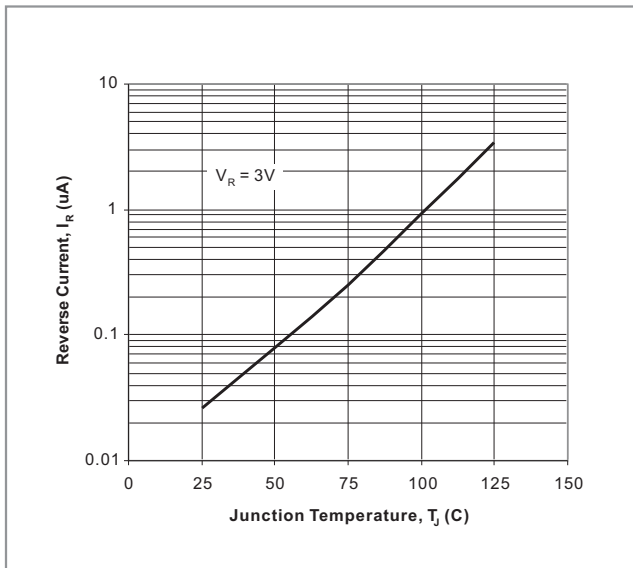


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

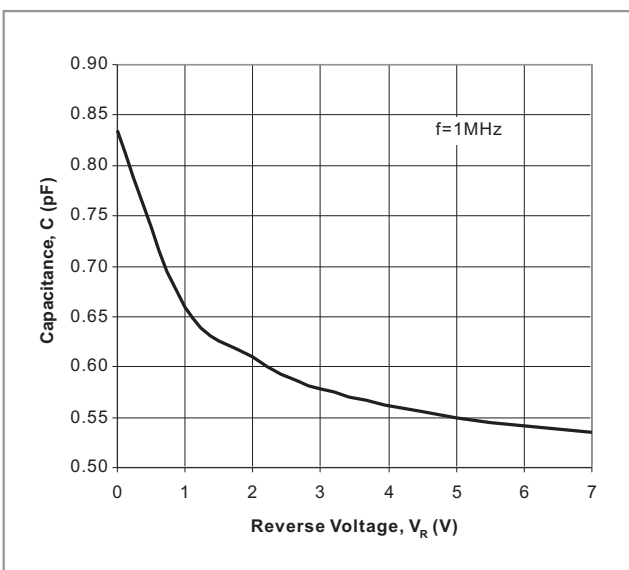


FIG. 3 TYPICAL TOTAL CAPACITANCE




MMBD101/MMBD352/MMBD354/MMBD355

MOUNTING PAD LAYOUT

SOT-23

Unit : inch(mm)

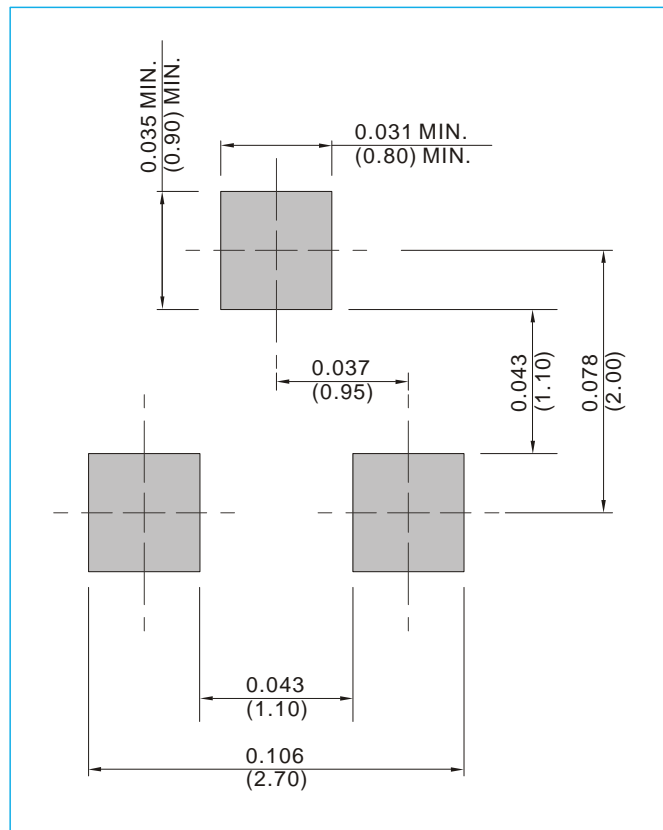

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel



MMBD101/MMBD352/MMBD354/MMBD355


Part No_packing code_Version

MMBD101_R1_00001

MMBD101_R2_00001

For example :

RB500V-40_R2_00001

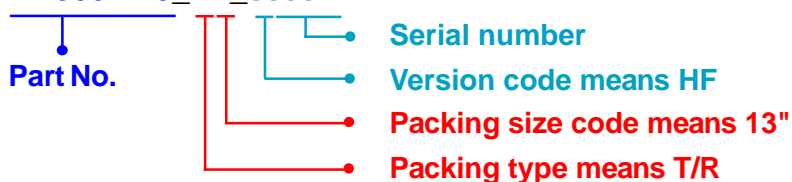

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMBD101/MMBD352/MMBD354/MMBD355

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.