



CBD2060LFCT

LOW VF SCHOTTKY RECTIFIER

VOLTAGE 60 Volts **CURRENT** 20 Amperes

FEATURES


- Low forward voltage drop, low power losses
- High efficiency operation
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case : ITO-220AB, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight: 0.055 ounces, 1.5615 grams.

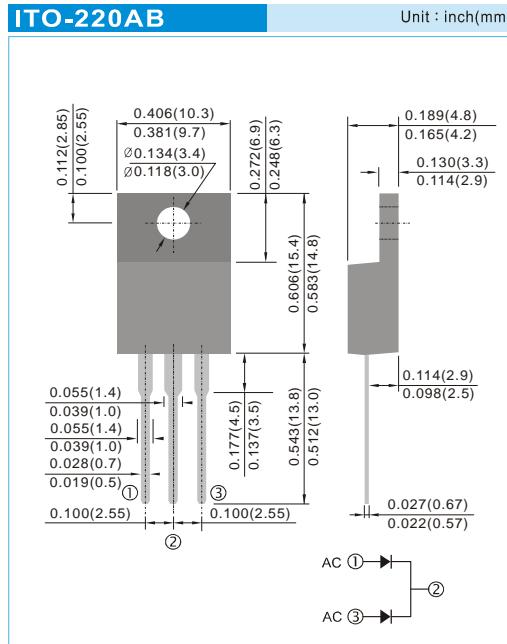

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	60	V
Maximum rms voltage	V_{RMS}	42	V
Maximum average forward rectified current per device per diode	$I_{F(AV)}$	20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200	A
Typical thermal resistance per diode (Note 1)	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Operating junction temperature range	T_J	-55 to + 150	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to + 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage per diode	V_{BR}	$I_R=1.0\text{mA}$	60	-	-	V
Instantaneous forward voltage per diode	V_F	$I_F=3\text{A}$ $I_F=5\text{A}$ $I_F=10\text{A}$	T $J=25^\circ\text{C}$	- 0.45 0.50 0.60	- 0.64	V
		$I_F=3\text{A}$ $I_F=5\text{A}$ $I_F=10\text{A}$	T $J=125^\circ\text{C}$	- 0.36 0.43 0.56	-	V
		$V_R=48\text{V}$		9	-	μA
	I_R	$V_R=60\text{V}$	T $J=25^\circ\text{C}$	-	100	μA
			T $J=125^\circ\text{C}$	12	-	mA

Note:1.Mounted on infinite heatsink.



CBD2060LFCT

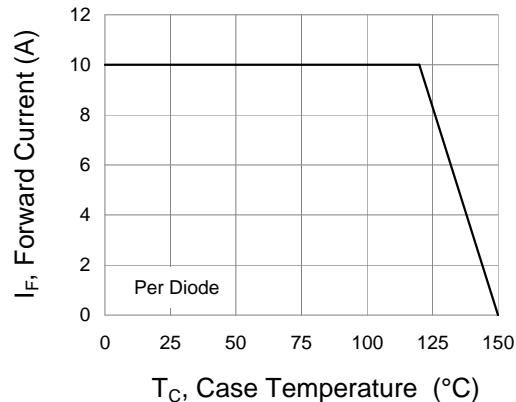


Fig.1 Forward Current Derating Curve

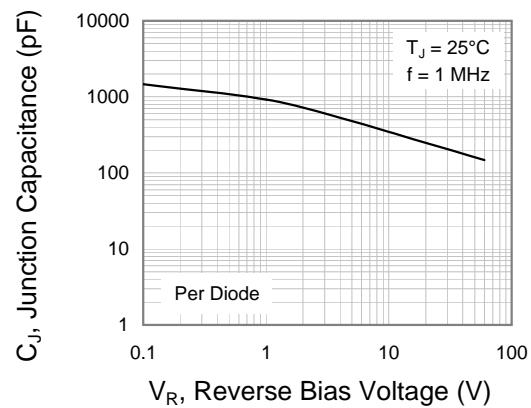


Fig.2 Typical Junction Capacitance

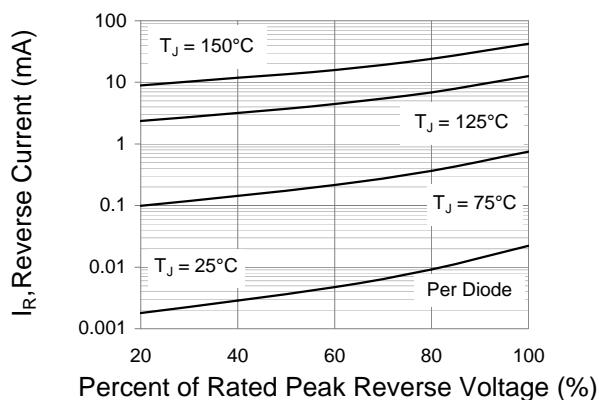


Fig.3 Typical Reverse Characteristics

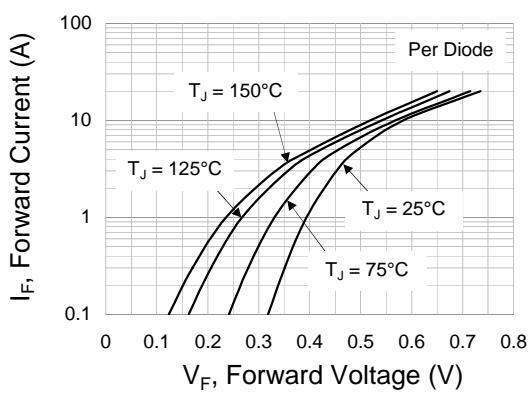


Fig.4 Typical Forward Characteristics