

GSM1073E

20V P-Channel Enhancement Mode MOSFET

Product Description

GSM1073E, P-Channel enhancement mode MOSFET, uses Advanced Trench Technology to provide excellent $R_{DS(ON)}$, low gate charge.

These devices are particularly suited for low voltage power management, such as smart phone and notebook computer, and low in-line power loss are needed in commercial industrial surface mount applications.


Features

- -20V/-0.6A, $R_{DS(ON)}=800m\Omega@V_{GS}=-4.5V$
- -20V/-0.5A, $R_{DS(ON)}=950m\Omega@V_{GS}=-2.5V$
- -20V/-0.4A, $R_{DS(ON)}=1250m\Omega@V_{GS}=-1.8V$
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Circuits
- ESD Protection (>2KV) Diode design-in
- Low Battery Voltage Operation
- SOT-723 package design


Applications

- Drivers : Relays, Solenoids, Lamps, Hammers, Displays, Memories
- Battery Operated Systems
- Power Supply Converter Circuits
- Load/Power Switching Smart Phones, Pagers

Packages & Pin Assignments

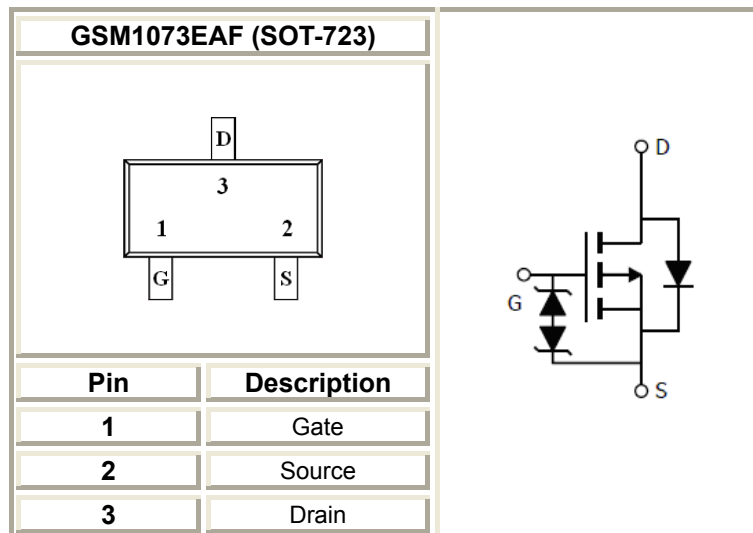


Ordering Information

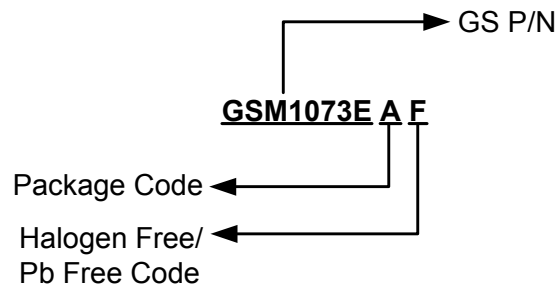

Part Number	Package	Quantity Reel
GSM1073EAF	SOT-723	8000 PCS

Marking Information



Absolute Maximum Ratings

(T_A=25°C unless otherwise noted)







Symbol	Parameter	Typical	Unit	
V _{DSS}	Drain-Source Voltage	-20	V	
V _{GSS}	Gate –Source Voltage	±12	V	
I _D	Continuous Drain Current(T _J =150°C)	T _A =25°C	-0.7	A
		T _A =70°C	-0.4	
I _{DM}	Pulsed Drain Current	-1.0	A	
I _S	Continuous Source Current(Diode Conduction)	-0.3	A	
P _D	Power Dissipation	T _A =25°C	0.27	W
		T _A =70°C	0.16	
T _J	Operating Junction Temperature	-55/150	°C	
T _{STG}	Storage Temperature Range	-55/150	°C	

Electrical Characteristics


(T_A=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	-20			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250uA	-0.4		-1.0	
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±12V			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-20V, V _{GS} =0V			-1	uA
		V _{DS} =-20V, V _{GS} =0V T _J =85°C			-5	
I _{D(on)}	On-State Drain Current	V _{DS} ≤ -5V, V _{GS} =-4.5V	-0.7			A
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =-4.5V, I _D =-0.6A		600	800	mΩ
		V _{GS} =-2.5V, I _D =-0.5A		800	950	
		V _{GS} =-1.8V, I _D =-0.4A		1000	1250	
g _{FS}	Forward Transconductance	V _{DS} =-10V, I _D =-0.4A		1		S
V _{SD}	Diode Forward Voltage	I _S =-0.15A, V _{GS} =0V		-0.65	-1.2	V
Dynamic						
C _{iss}	Input Capacitance	V _{DS} =-10V, V _{GS} =0V, f=1MHz		70	100	pF
C _{oss}	Output Capacitance			20		
C _{rss}	Reverse Transfer Capacitance			10		
Q _g	Total Gate Charge	V _{DS} =-10V, V _{GS} =-4.5V, I _D =-0.25A		1.0	1.3	nC
Q _{gs}	Gate-Source Charge			0.1		
Q _{gd}	Gate-Drain Charge			0.3		
t _{d(on)}	Turn-On Time	V _{DD} =-10V, R _L =30Ω, I _D =-0.2A, V _{GEN} =-4.5V, R _G =10Ω		10	15	ns
t _r				10	15	
t _{d(off)}	Turn-Off Time			40	60	
t _f				30	50	


Typical Performance Characteristics

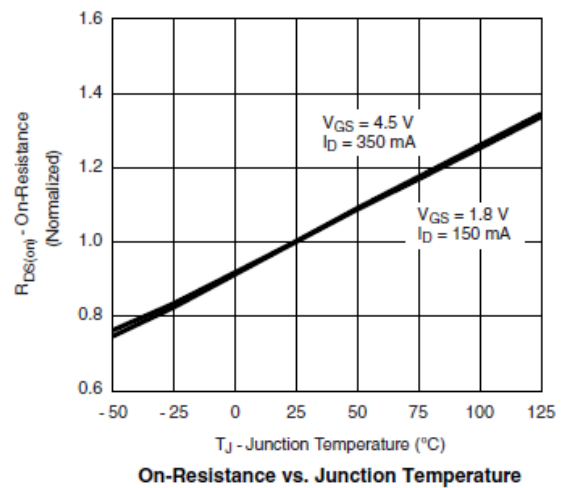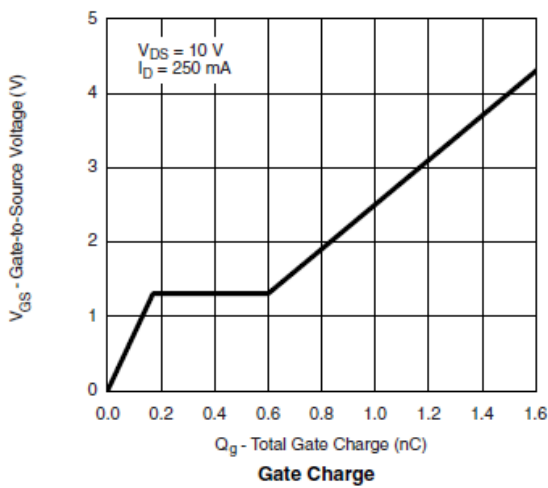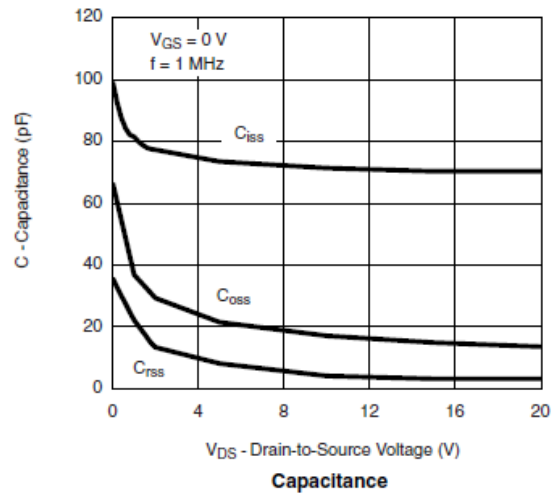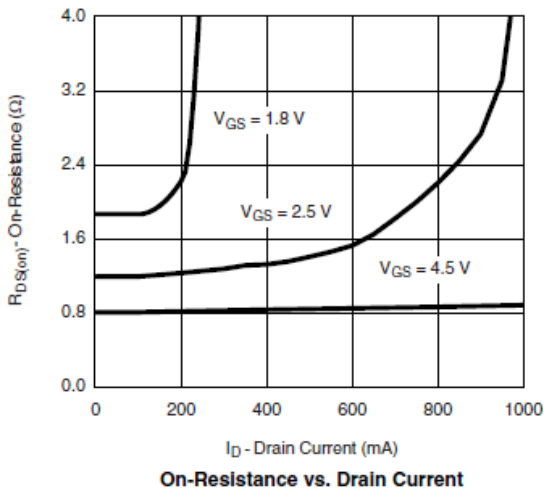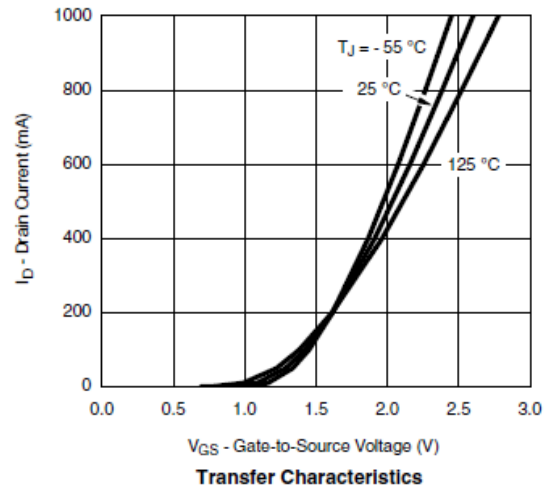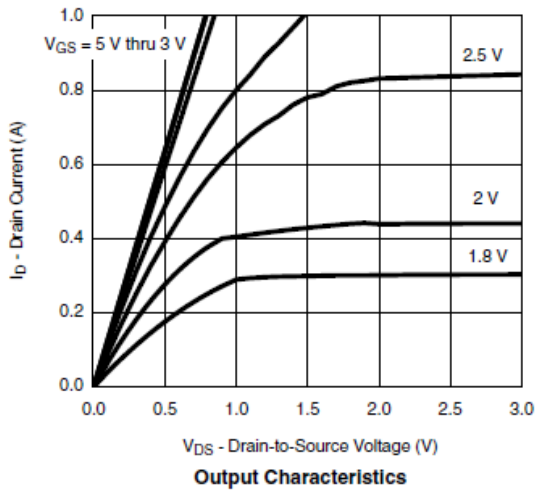


Typical Performance Characteristics (continue)

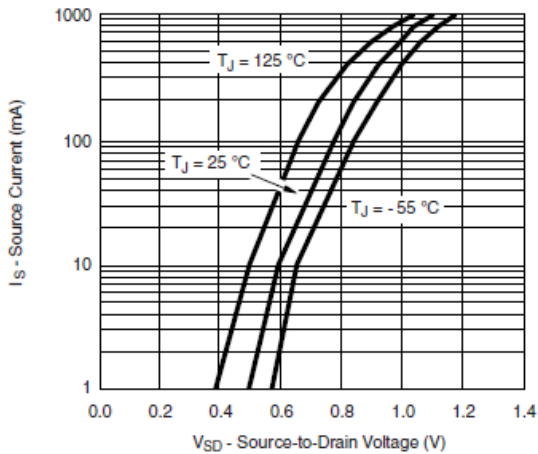


Source-Drain Diode Forward Voltage

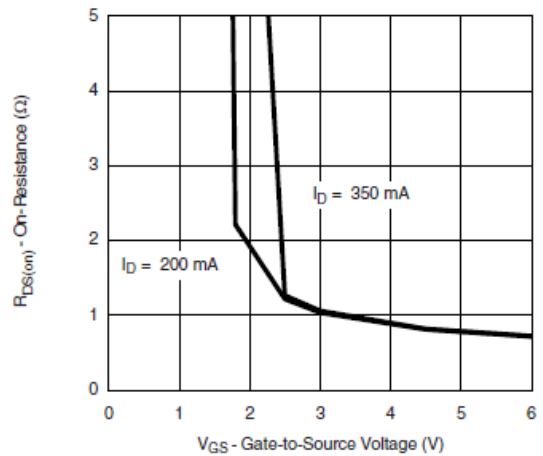


On-Resistance vs. Gate-to-Source Voltage

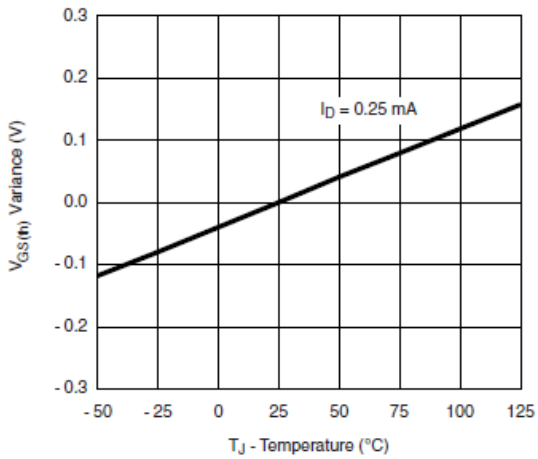

Threshold Voltage Variance vs. Temperature

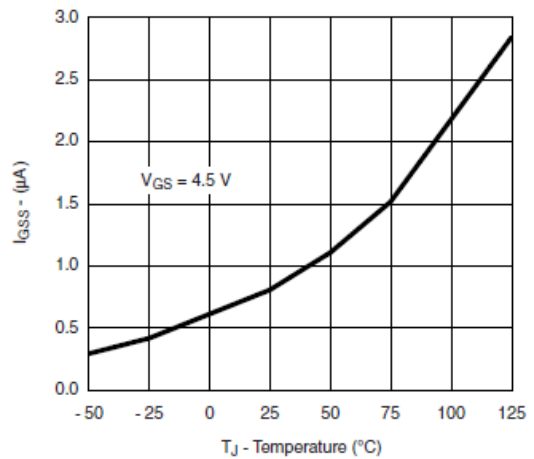


I_{GSS} vs. Temperature

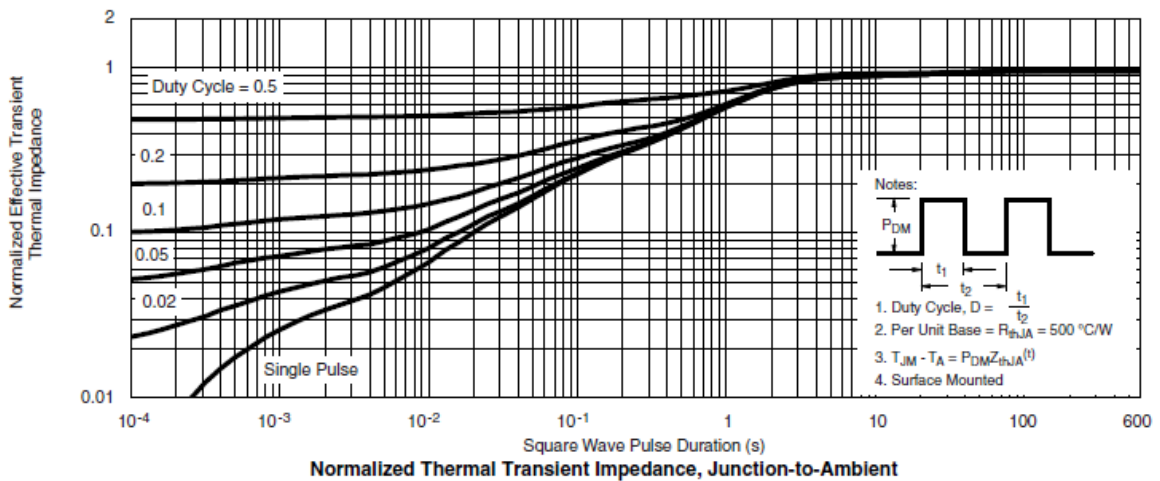


Normalized Thermal Transient Impedance, Junction-to-Ambient

Typical Performance Characteristics (continue)


Gate Charge Test Circuit & Waveform

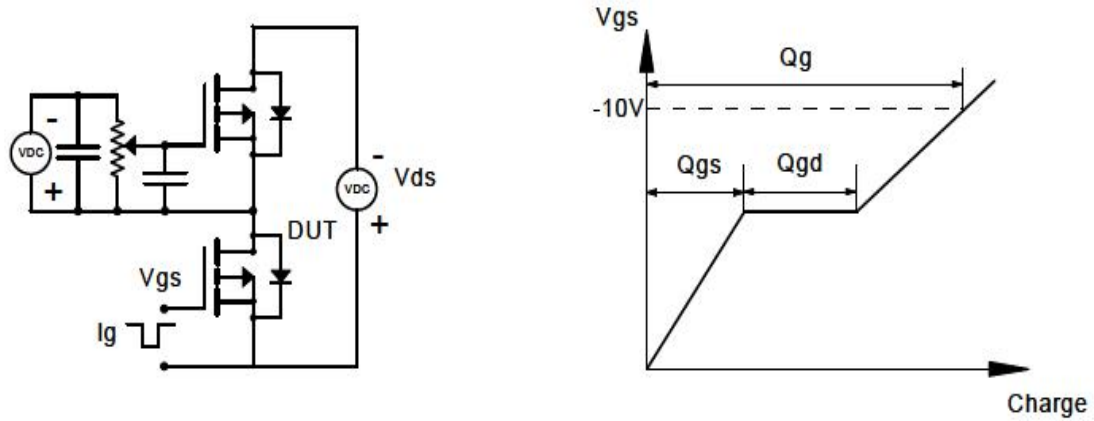

Resistive Switching Test Circuit & Waveforms

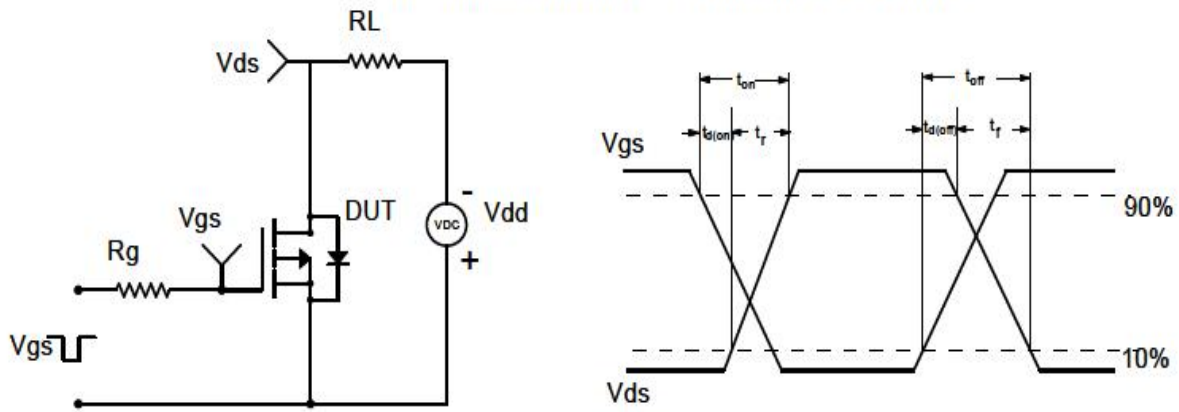


Diode Recovery Test Circuit & Waveforms

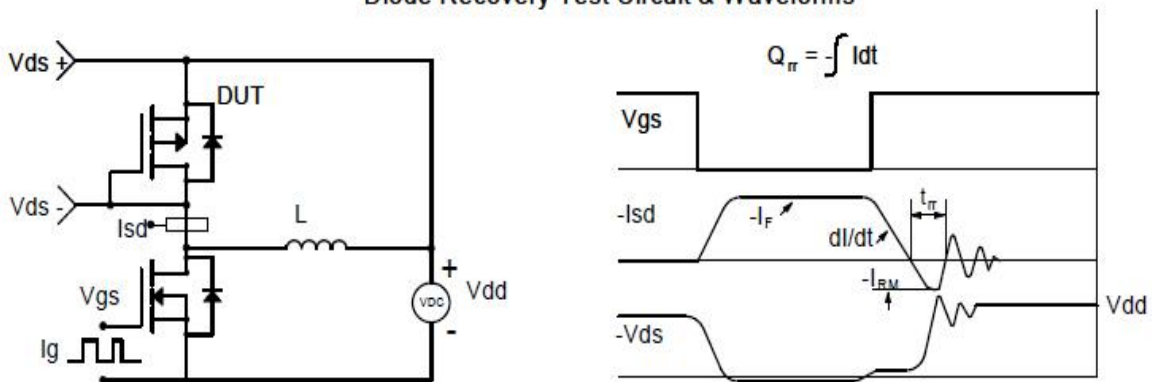

Package Dimension

SOT-723

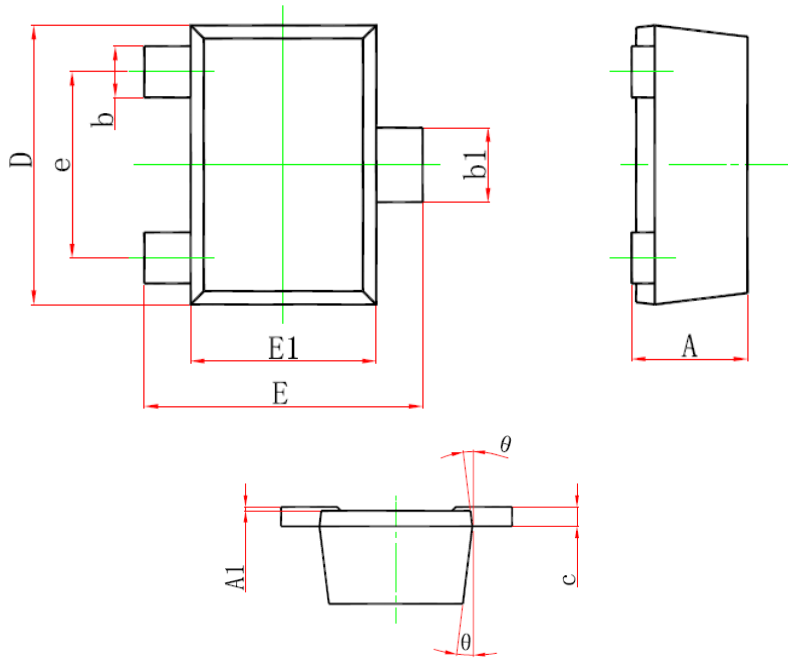









Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	-	0.500	-	0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c	-	0.150	-	0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800 TYP		0.031 TYP	
θ	7° REF		7° REF	



NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

Wu-Xi Branch	
	No.21 Changjiang Rd., WND, Wuxi, Jiangsu, China (INFO. &. TECH. Science Park Building A 210 Room)
	86-510-85217051
	86-510-85211238
	sales_cn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587