

GSTMMBT3906

PNP General Purpose Transistor


Product Description


This device is designed as a general purpose amplifier and switch.

Features

- Lead(Pb)-Free

Packages & Pin Assignments


GSTMMBT3906F(SOT-23)	
	
Pin	Description
1	Base
2	Emitter
3	Collector



Marking Information

P/N	Package	Part Marking
GSTMMBT3906F	SOT-23	2A

Ordering Information

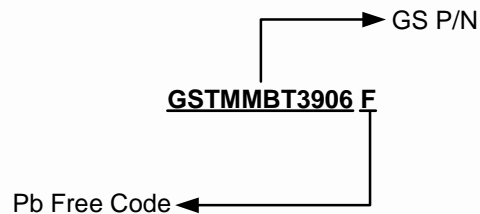

Part Number	Package	Quantity
GSTMMBT3906F	SOT-23	3000 PCS

Absolute Maximum Ratings

$T_A=25^\circ\text{C}$

Symbol	Conditions	Value	Unit
V_{CEO}	Collector-Emitter Voltage	-40	V
V_{CBO}	Collector-Base Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5.0	V
$I_{C(DC)}$	Collector Current (DC)	-200	mA
P_D	Total Device Dissipation FR-5 Board ⁽¹⁾ $T_A=25^\circ\text{C}$	225	mW
	Derate above 25°C	1.8	mW/ $^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	556	$^\circ\text{C}/\text{W}$
P_D	Total Device Dissipation Alumina Substrate ⁽²⁾ $T_A=25^\circ\text{C}$	300	mW
	Derate above 25°C	2.4	mW/ $^\circ\text{C}$
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	417	$^\circ\text{C}/\text{W}$
T_J	Junction Temperature Range	-55 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ\text{C}$

Note 1: FR-5=1.0 x 0.75 x 0.062 in

Note 2: Alumina=0.4 x 0.3 x 0.024 in. 99.5% alumina.

Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Conditions	Min	Max	Unit
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ⁽³⁾ ($I_C=-1.0\text{mA}$, $I_B=0\text{mA}$)	-40	-	V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\mu\text{A}$, $I_E=0\text{mA}$)	-40	-	V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=-10\mu\text{A}$, $I_C=0\text{mA}$)	-5.0	-	V
I_{CEX}	Collector Cutoff Current ($V_{CE}=-30\text{V}$, $V_{EB}=-3.0\text{V}$)	-	-50	nA
I_{BL}	Base Cutoff Current ($V_{CE}=-30\text{V}$, $V_{EB}=-3.0\text{V}$)	-	-50	nA
h_{FE}	DC Current Gain ($I_C=-0.1\text{mA}$, $V_{CE}=-1.0\text{V}$)	60	-	-
	DC Current Gain ($I_C=-1.0\text{mA}$, $V_{CE}=-1.0\text{V}$)	80	-	-
	DC Current Gain ($I_C=-10\text{mA}$, $V_{CE}=-1.0\text{V}$)	100	300	-
	DC Current Gain ($I_C=-50\text{mA}$, $V_{CE}=-1.0\text{V}$)	60	-	-
	DC Current Gain ($I_C=-100\text{mA}$, $V_{CE}=-1.0\text{V}$)	30	-	-

Electrical Characteristics (Continue)

(T_A=25°C unless otherwise noted)

Symbol	Conditions	Min	Max	Unit
V _{CE(sat)}	Collector-Emitter Saturation Voltage ⁽³⁾ (I _C =-10mA, I _B =-1.0mA) (I _C =-50mA, I _B =-5.0mA)	- -	-0.25 -0.4	V
V _{BE(sat)}	Base-Emitter Saturation Voltage ⁽³⁾ (I _C =-10mA, I _B =-1.0mA) (I _C =-50mA, I _B =-5.0mA)	-0.65 -	-0.85 -0.95	V
f _T	Current-Gain-Bandwidth Product ⁽⁴⁾ (I _C =-10mA, V _{CE} =-20V, f=100MHz)	250	-	MHz
C _{obo}	Output Capacitance (V _{CB} =-5V, I _E =0mA, f=1.0MHz)	-	4.5	pF
C _{ibo}	Input Capacitance (V _{EB} =-0.5V, I _C =0mA, f=1.0MHz)	-	10.0	pF
h _{ie}	Input Impedance (I _C =-1.0mA, V _{CE} =-10V, f=1.0 kHz)	2.0	12	KΩ
h _{re}	Voltage Feedback Ratio (I _C =-1.0mA, V _{CE} =-10V, f=1.0 kHz)	0.1	10.0	×10 ⁻⁴
h _{fe}	Small-Signal Current Gain (I _C =-1.0mA, V _{CE} =-10V, f=1.0 kHz)	100	400	-
h _{oe}	Output Admittance (I _C =-1.0mA, V _{CE} =-10V, f=1.0kHz)	3.0	60	umhos
NF	Noise Figure (I _C =-100μA, V _{CE} =-5V, R _S =1.0kΩ, f=1.0kHz)	-	4.0	dB
t _d	Delay Time (V _{CC} =-3.0V, V _{BE} =0.5V, I _C =-10mA, I _{B1} =-1.0mA)	-	35	ns
t _r	Rise Time (V _{CC} =-3.0V, V _{BE} =0.5V, I _C =-10mA, I _{B1} =-1.0mA)	-	35	ns
t _s	Storage Time (V _{CC} =-3.0V, I _C =-10mA, I _{B1} =I _{B2} =-1.0mA)	-	225	ns
t _f	Fall Time (V _{CC} =-3.0V, I _C =-10mA, I _{B1} =I _{B2} =-1.0mA)	-	75	ns

Note 3: Pulse Test: Pulse Width ≤ 300 us, Duty Cycle ≤ 2.0%

Note 4: f_T is defined as the frequency at which h_{fe} extrapolates to unity

Typical Application Circuit

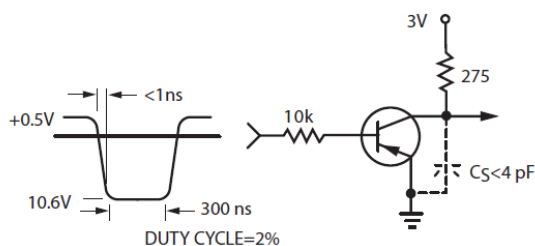


FIG.1 Delay and Rise Time
Equivalent Test Circuit

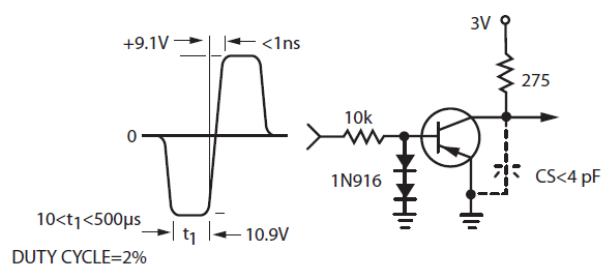


FIG.2 Storage and Fall Time
Equivalent Test Circuit

*Total shunt capacitance of test jig and connectors

Typical Performance Characteristics

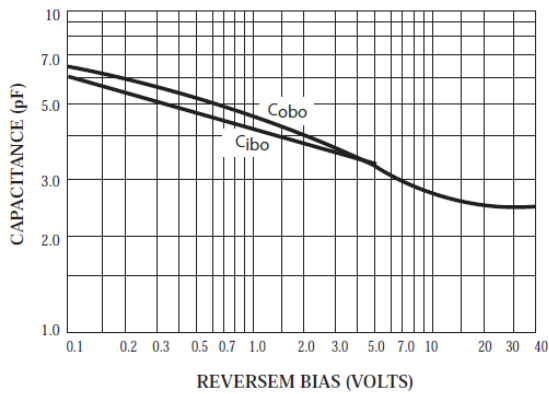


FIG.3 Capacitance

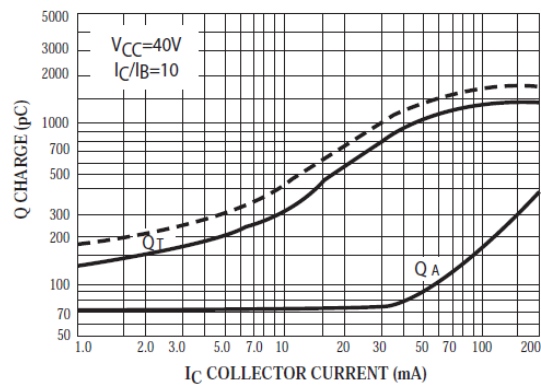


FIG.4 Charge Data

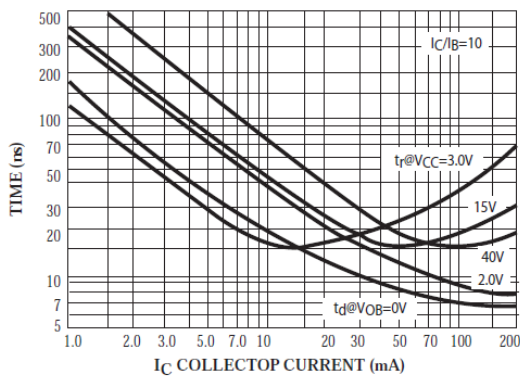


FIG.5 Turn-On Time

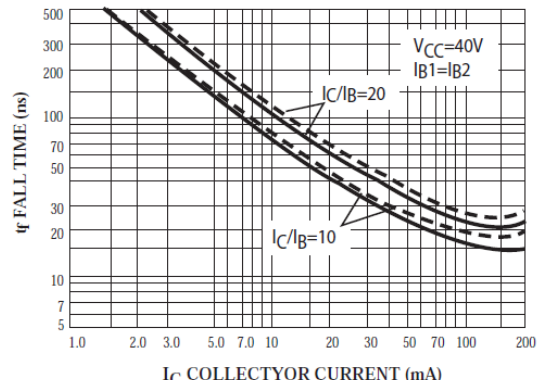


FIG.6 Fall Time

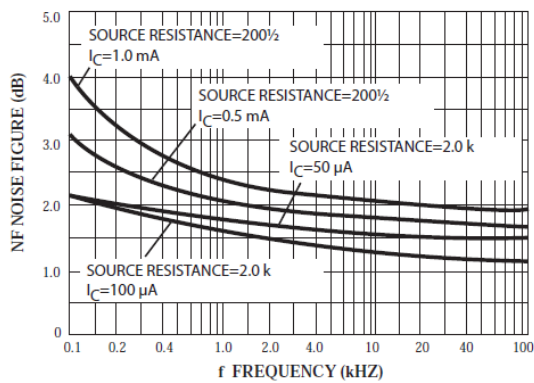


FIG.7

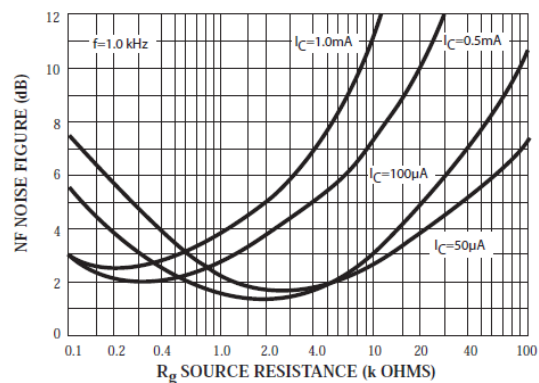


FIG.8

h PARAMETERS (VCE = -10 Vdc, f = 1.0 kHz, TA = 25°C)

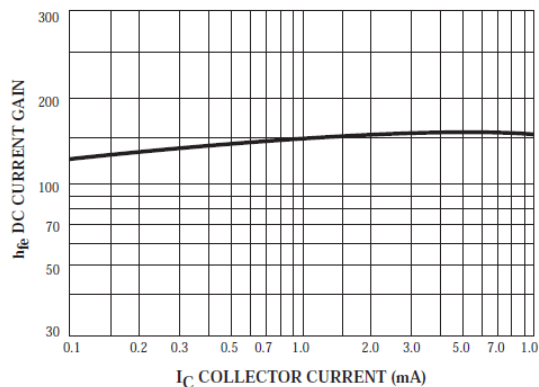


FIG.9 Current Gain

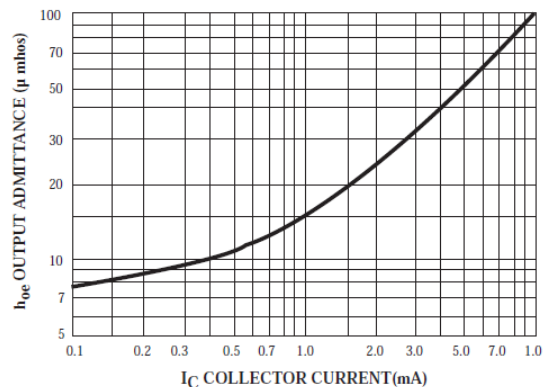


FIG.10 Input Impedance

Typical Performance Characteristics (Continue)

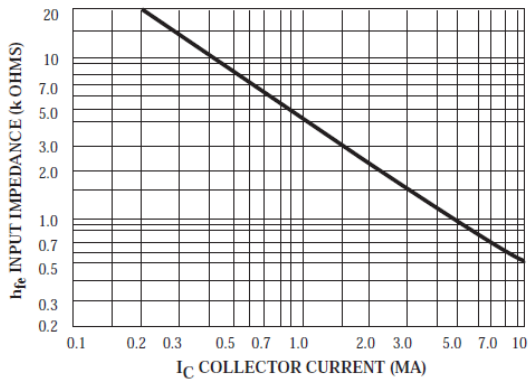


FIG.11 Input Impedance

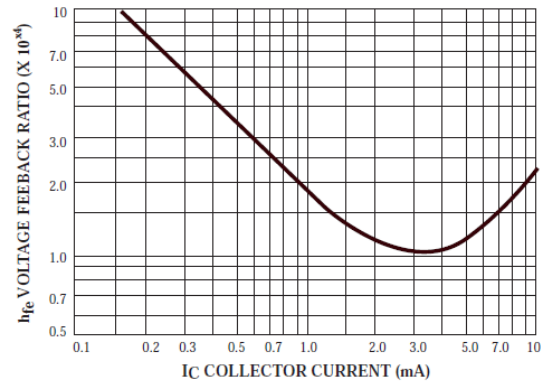


FIG.12 Voltage Feedback Ratio

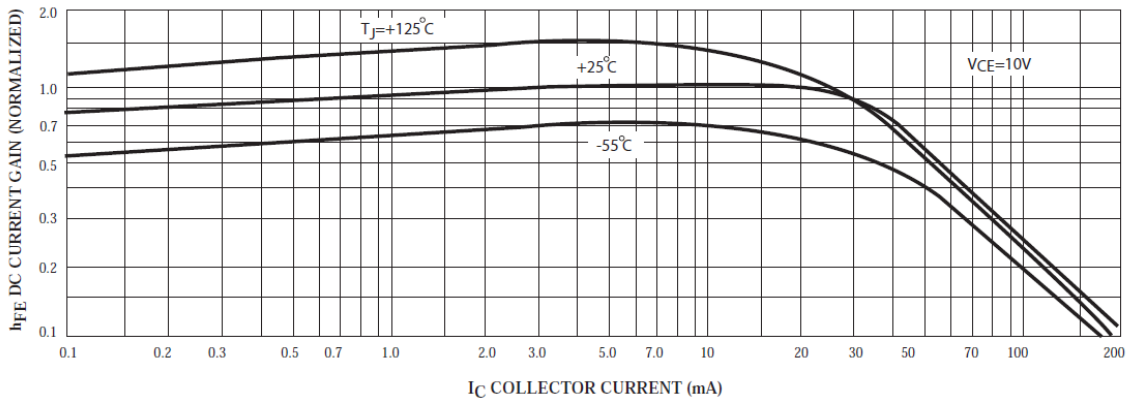


FIG.13 DC Current Gain

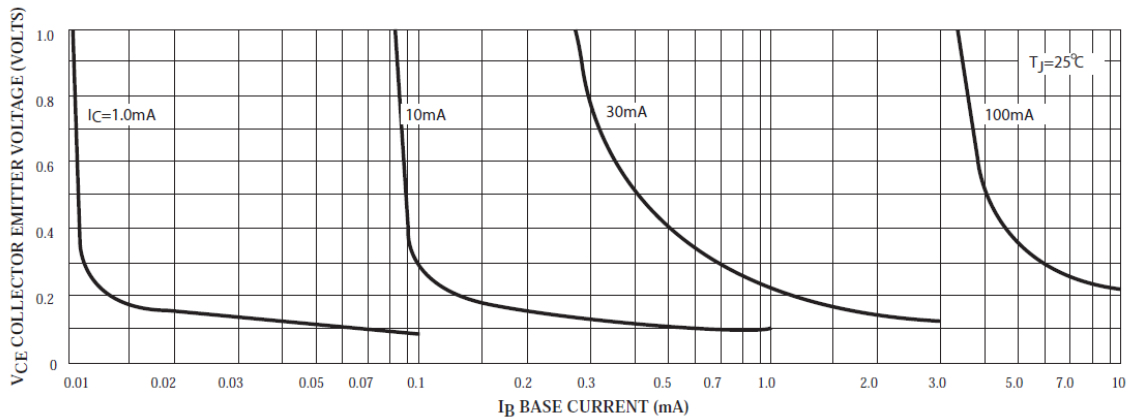


FIG.14 Collector Saturation Region

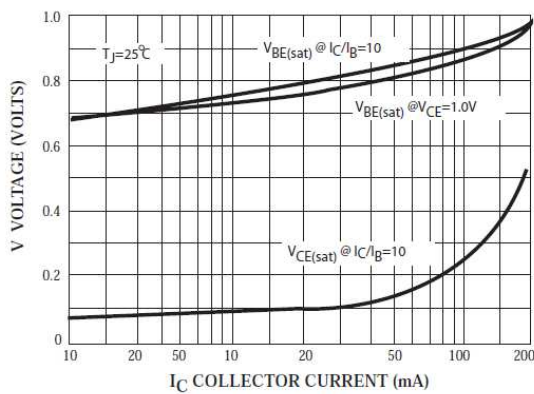


FIG.15 "ON" Voltages


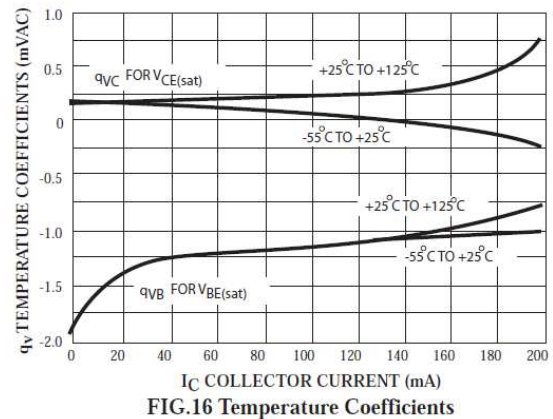


FIG.16 Temperature Coefficients

Package Dimension

SOT-23

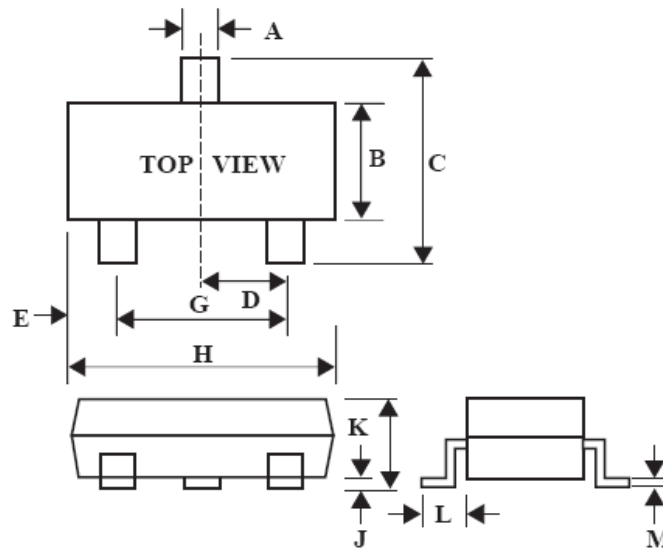









Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.35	0.51	0.014	0.020
B	1.19	1.40	0.047	0.055
C	2.10	3.00	0.083	0.118
D	0.85	1.05	0.033	0.041
E	0.46	1.00	0.018	0.039
G	1.70	2.10	0.067	0.083
H	2.70	3.10	0.106	0.122
J	0.01	0.13	0.000	0.005
K	0.89	1.10	0.035	0.043
L	0.30	0.61	0.011	0.024
M	0.076	0.25	0.002	0.010



NOTICE

Information furnished is believed to be accurate and reliable. However Globaltech Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Globaltech Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of Globaltech Semiconductor.

CONTACT US

GS Headquarter	
	4F.,No.43-1,Lane11,Sec.6,Minquan E.Rd Neihu District Taipei City 114, Taiwan (R.O.C)
	886-2-2657-9980
	886-2-2657-3630
	sales_twn@gs-power.com

Wu-Xi Branch	
	No.21 Changjiang Rd., WND, Wuxi, Jiangsu, China (INFO. & TECH. Science Park Building A 210 Room)
	86-510-85217051
	86-510-85211238
	sales_cn@gs-power.com

RD Division	
	824 Bolton Drive Milpitas. CA. 95035
	1-408-457-0587