


## SR520-HF Thru. SR5200-HF

**Forward current: 5.0A**  
**Reverse voltage: 20 to 200V**  
**RoHS Device**  
**Halogen Free**




### Features

- Axial lead type devices for through hole design.
- Low power loss, high efficiency.
- High current capability, Low forward voltage drop.
- High surge capability.
- Guardring for overvoltage protection.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.
- Lead-free part meets environmental standards of MIL-STD-19500/228

### Mechanical Data

- Case: Molded plastic, DO-201AD/DO-27
- Epoxy: UL94V-0 rate flame retardant.
- Lead: Axial lead, solderable per MIL-STD-202, Method 208 guranteed.
- Polarity: color band denoted cathode end.
- Weight: 1.10 gram (approx.).

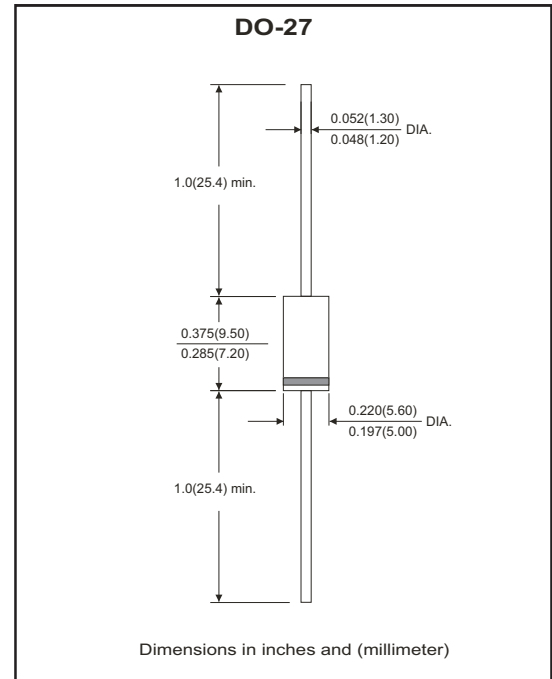

### Maximum Ratings and Electrical Characteristics

Ratings at Ta=25°C unless otherwise noted.  
 Single phase, half wave, 60Hz, resistive or inductive loaded.  
 For capacitive load, derate current by 20% .

Parameter	Symbol	SR520 -HF	SR540 -HF	SR560 -HF	SR5100 -HF	SR5150 -HF	SR5200 -HF	Unit
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	20	40	60	100	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	70	105	140	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	40	60	100	150	200	V
Maximum instantaneous forward voltage at I <sub>F</sub> =5A, T <sub>A</sub> =25°C	V <sub>F</sub>	0.50	0.55	0.75	0.81	0.87	0.90	V
Operating junction temperature range	T <sub>J</sub>	-50 ~ +150				-50 ~ +175		°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	Unit
Forward rectified current	see Fig.1	I <sub>o</sub>			5.0	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I <sub>FSM</sub>			125	A
Reverse Current	V <sub>R</sub> =V <sub>RRM</sub> T <sub>A</sub> =25°C	I <sub>R</sub>			0.5	mA
	V <sub>R</sub> =V <sub>RRM</sub> T <sub>A</sub> =100°C	I <sub>R</sub>			20	mA
Thermal Resistance	Junction to ambient	R <sub>θJA</sub>		24		°C/W
Diode Junction capacitance	f=1MHz and applied 4V DC reverse Voltage	C <sub>J</sub>		380		pF
Storage temperature		T <sub>STG</sub>	-50		+175	°C

## RATING AND CHARACTERISTIC CURVES (SR520-HF Thru. SR5200-HF)

Fig.1 - Typical Forward Current Derating Curve

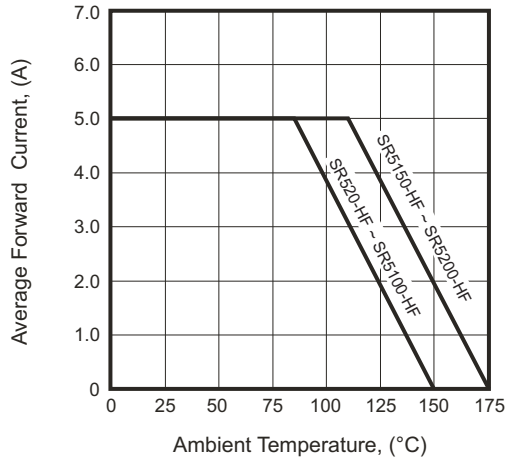


Fig.2 - Typical Forward Characteristics

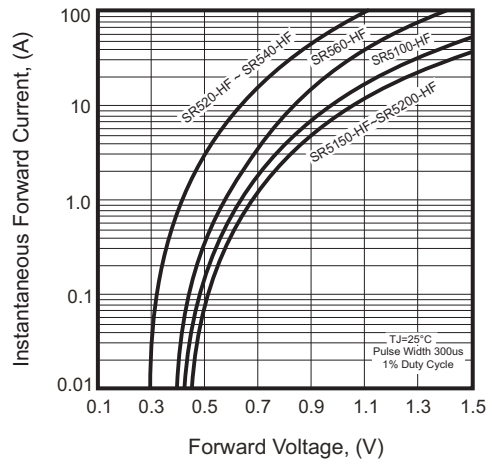


Fig.3 - Maximum Non-repetitive Forward Surge Current

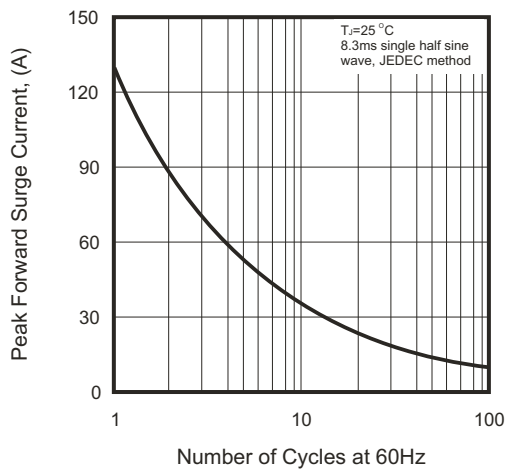


Fig.4 - Typical Junction Capacitance



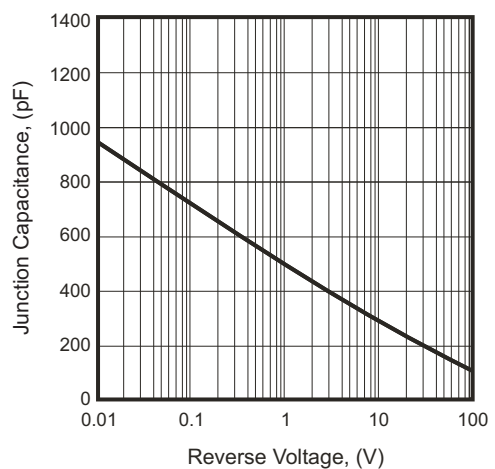


Fig.5 - Typical Reverse Characteristics

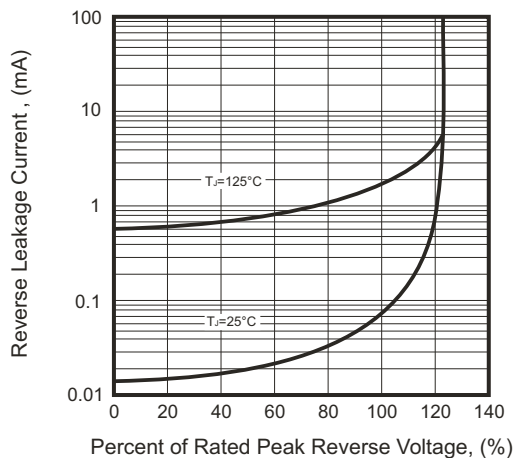

## Taping Specification For Axial Lead Diodes

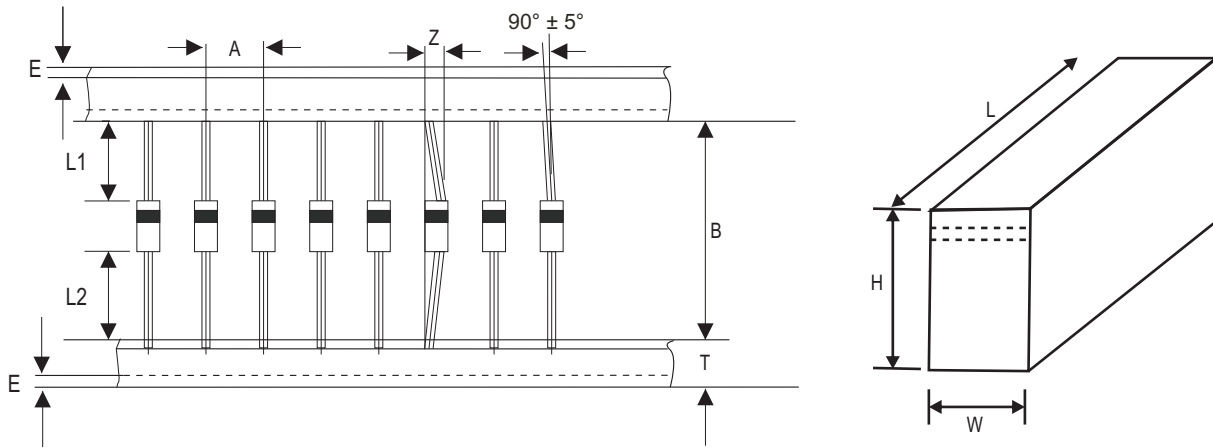


DO-27	SYMBOL	A	B	Z	T	E	L1	L2
	(mm)	9.30 ± 0.50	52.40 (max)	1.20 (max)	6.00 ± 0.40	0.80 (max)	1.00 (max)	1.00 (max)
	(inch)	0.366 ± 0.020	2.063 (max)	0.047 (max)	0.236 ± 0.016	0.031 (max)	0.039 (max)	0.039 (max)

DO-27	SYMBOL	D1	D0	D	W0	L	W	H
	(mm)	85.70 ± 0.30	16.60 ± 0.40	330.00	72.00 ± 3.00	260.00	75.00	145.00
	(inch)	3.374 ± 0.012	0.654 ± 0.016	13.000	2.835 ± 0.118	10.236	2.953	5.709

## Marking Code

Part Number	Marking Code
SR520-HF	SR52
SR540-HF	SR54
SR560-HF	SR56
SR5100-HF	SR510
SR5150-HF	SR515
SR5200-HF	SR520

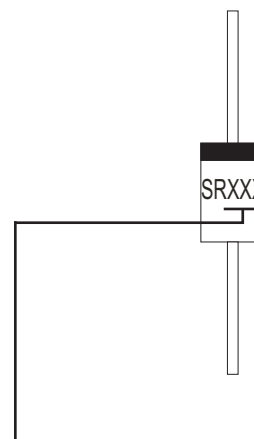

XX / XXX = Product type marking code

## Standard Packaging

Case Type	AMMO PACK	
	BOX ( pcs )	CARTON ( pcs )
DO-27	500	9,000