

Surface Mount High Current Density Schottky Rectifiers 1.0 Amp 40V


SD14

FEATURES

- Guarding protection
- Low forward voltage
- Reverse energy tested
- High current capability
- Extremely low thermal resistance

MECHANICAL DATA

- Case: SOD-123 Molded plastic
- Epoxy: UL94V-O rate flame retardant
- Lead: Lead Formed for Surface Mount
- Polarity: Color band denotes cathode end
- Mounting position: Any

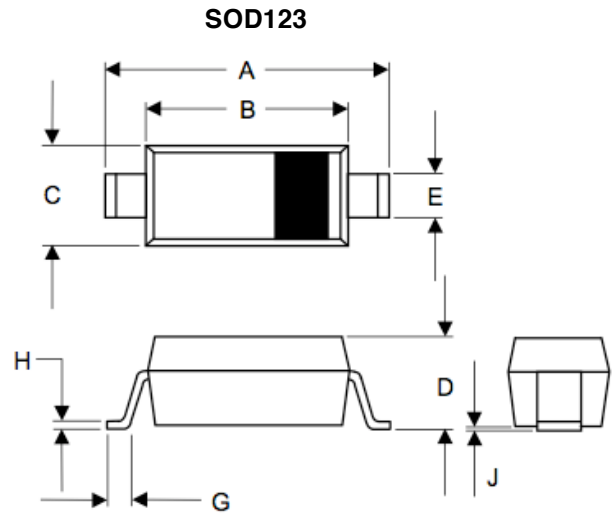

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	----	.053	----	1.35	
E	.012	.031	0.30	.78	
G	.006	----	0.15	----	
H	----	.01	----	.25	
J	----	.006	----	.15	

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	SD14	Unit
Maximum repetitive peak reverse voltage	VRRM	40	V
RMS Voltage (Max.)	VRMS	28	V
Working peak reverse voltage	VRWM	40	V
Maximum average forward rectified current	IF(AV)	1.0	A
Peak forward surge current	IFSM	30	A
8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		180	
1pulse/4S t=500us exponent wave			
Operating junction temperature range	TJ	-55 to +125	°C
Storage temperature range	TSTG	-55 to +150	°C

Electrical characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Value		Unit
		Typical	Max	
Instantaneous forward voltage at IF=1A, Tj=25°C	VF	0.48	0.50	V
Maximum reverse current at working peak reverse voltage Tj=100°C	IR	200		u'A
		20		m'A
Junction Capacitance	CJ	230		pF

Thermal characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Typical thermal resistance	RθJA	320	°C/W

Notes:

- (1) Pulse test: 300 μs pulse width, 1 % duty cycle
- (2) Pulse test: Pulse width ≤ 40 ms

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 FORWARD DERATING CURVE

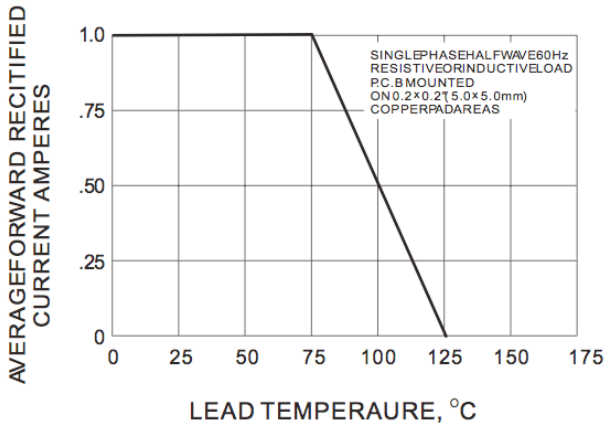


FIG. 2 TYPICAL JUNCTION CHARACTERISTIC

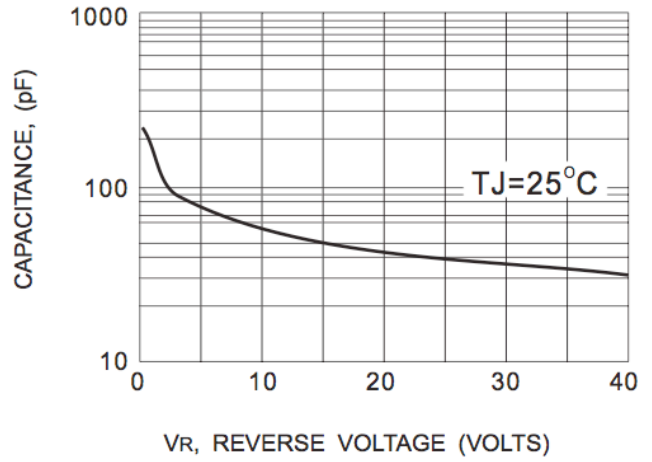


FIG. 3 TYPICAL REVERSE CHARACTERISTICS

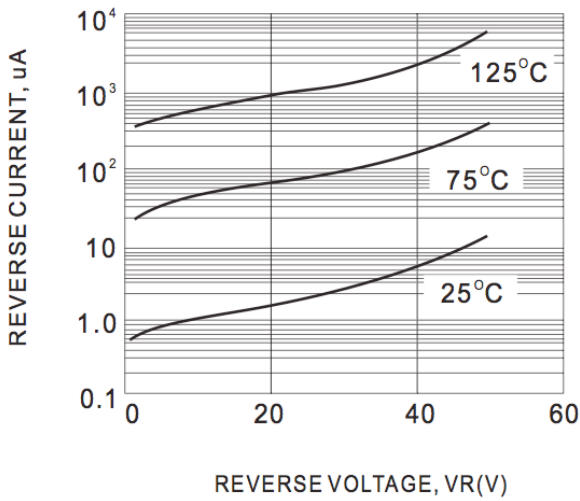


FIG. 4 TYPICAL FORWARD CHARACTERISTICS

