

MS6N80

800V N-Channel MOSFET

Description


The MS6N80 is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-220 package is universally preferred for all commercial-industrial applications

Features

- Originative New Design
- Very Low Intrinsic Capacitances
- Excellent Switching Characteristics
- Unrivalled Gate Charge : 37nC (Typ.)
- Extended Safe Operating Area
- RoHS compliant package

Application

- Adapter
- Switching Mode Power Supply

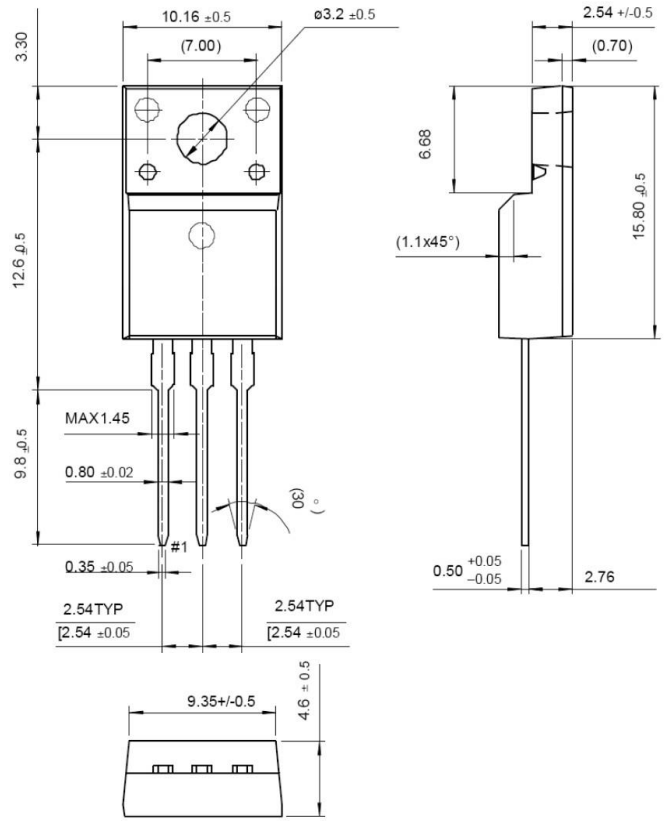


Packing & Order Information

50/Tube ; 1,000/Box



**RoHS
COMPLIANT**

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings (Tc=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit
V _{DSS}	Drain-Source Voltage	800	V
I _D	Drain Current -Continuous (TC=25°C)	36	A
	Drain Current -Continuous (TC=100°C)	4.2	A
I _{DM}	Drain Current –Pulsed	28	A
V _{GS}	Gate-Source Voltage	±30	V
E _{AS}	Single Pulsed Avalanche Energy	580	mJ
E _{AR}	Repetitive Avalanche Energy	16.7	mJ
dv/dt	Peak Diode Recovery dv/dt	5.5	V/ns
P _D	Power Dissipation (TC=25°C) - Derate above 25°C	156	W
		1.25	W/°C

MS6N80

800V N-Channel MOSFET

Absolute Maximum Ratings (Tc=25°C unless otherwise specified)

Symbol	Parameter	Value	Unit
T_J/T_{STG}	Operating and Storage Temperature Range	-55 to +150	°C
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C

- Drain current limited by maximum junction temperature

Thermal Resistance Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	0.75	°C/W
$R_{\theta JA}$	Junction-to-Ambient	--	62.5	

On Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
V_{GS}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.5	--	4.5	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS} = 10 V, I_D = 3 A$	--	1.6	2.3	Ω

Off Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 V, I_D = 250\mu A$	800	--	--	V
$\Delta BV_{DSS} / \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250\mu A$, Referenced to 25°C	--	0.6	--	V/°C
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 800 V, V_{GS} = 0 V$ $V_{DS} = 640 V, V_C = 125^\circ C$	--	--	10 100	μA
I_{GSSF}	Gate-Body Leakage Current, Forward	$V_{GS} = 30 V, V_{DS} = 0 V$	--	--	100	μA
I_{GSSR}	Gate-Body Leakage Current, Reverse	$V_{GS} = -30 V, V_{DS} = 0 V$	--	--	100	nA

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
C_{ISS}	Input Capacitance	$V_{DS} = 25 V, V_{GS} = 0 V,$ $f = 1.0 MHz$	--	1500	2010	pF
C_{OSS}	Coss Output Capacitance		--	145	190	pF
C_{RSS}	Crss Reverse Transfer Capacitance		--	13	20	pF

MS6N80

800V N-Channel MOSFET

Switching Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Time	$V_{DS} = 400\text{ V}, I_D = 6\text{ A},$ $R_G = 25\ \Omega$	--	40	--	ns
t_r	Turn-On Rise Time		--	120	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	60	--	ns
t_f	Turn-Off Fall Time		--	70	--	ns
Q_g	Total Gate Charge	$V_{DS} = 640\text{ V}, I_D = 6\text{ A},$ $V_{GS} = 7\text{ V}$	--	35	--	nC
Q_{gs}	Gate-Source Charge		--	11	--	nC
Q_{gd}	Gate-Drain Charge		--	15	--	nC

Source-Drain Diode Maximum Ratings and Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
I_S	Continuous Source-Drain Diode Forward Current		--	--	7	A
I_{SM}	ISM Pulsed Source-Drain Diode Forward Current		--	--	28	
V_{SD}	Source-Drain Diode Forward Voltage	$I_S = 6\text{ A}, V_{GS} = 0\text{ V}$	--	--	1.4	V
t_{rr}	Reverse Recovery Time	$I_S = 6\text{ A}, V_{GS} = 0\text{ V}$ $diF/dt = 100\text{ A}/\mu\text{s}$	--	650	--	ns
Q_{rr}	Reverse Recovery Charge		--	8	--	μC

Notes:

1. Repeativity rating : pulse width limited by junction temperature
2. $L = 34.0\text{mH}, I_{AS} = 6.0\text{A}, V_{DD} = 50\text{V}, R_G = 25\ \Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{SD} \leq 6.0\text{A}, di/dt \leq 200\text{A}/\mu\text{s}, V_{DD} \leq BVDSS$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially independent of operating temperature.

MS6N80

800V N-Channel MOSFET

■ Characteristics Curve

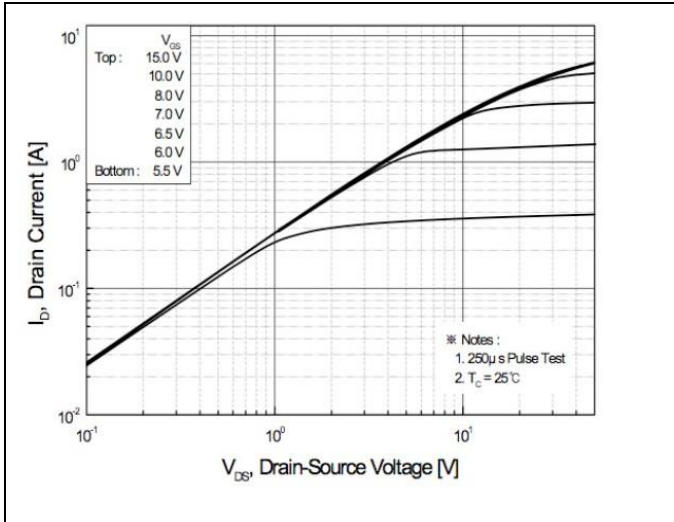


FIG.1-ON REGION CHARACTERISTICS

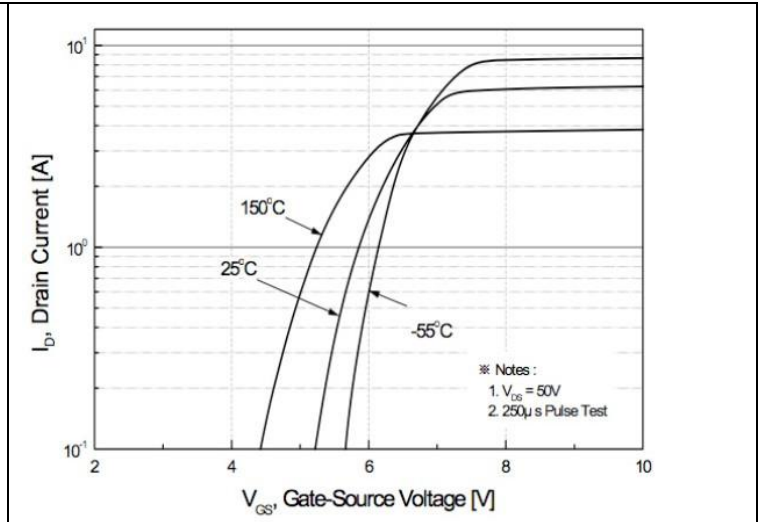


FIG.2-TRANSFER CHARACTERISTICS

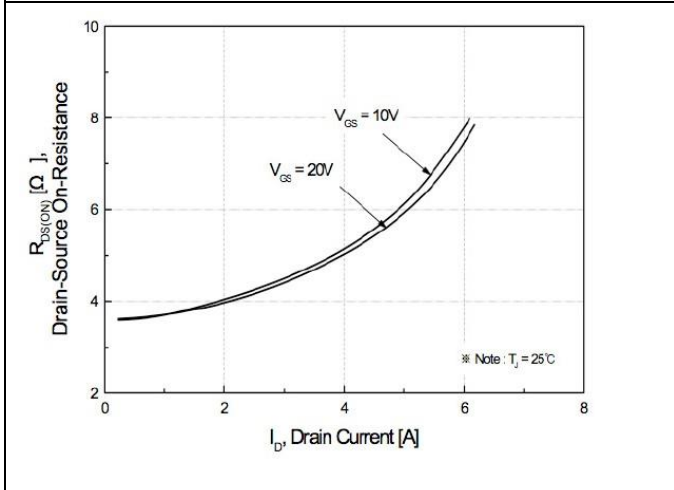


FIG.3-ON RESISTANCE VARIATION VS DRAIN CURRENT AND GATE VOLTAGE

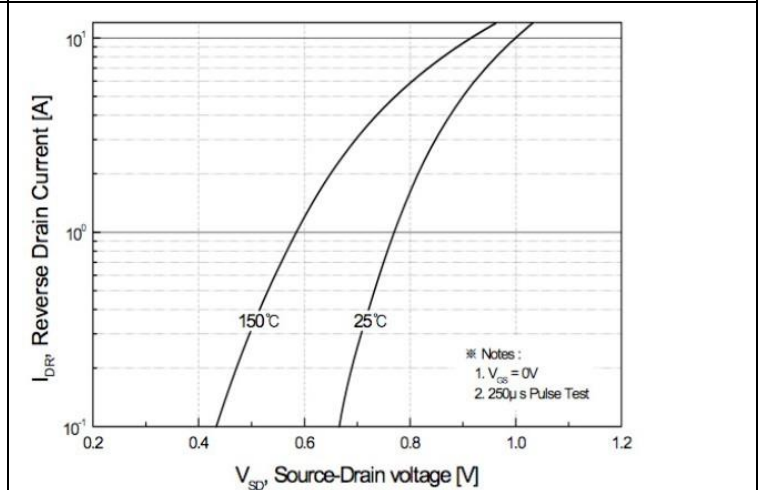


FIG.4-BODY DIODE FORWARD VOLTAGE VARIATION WITH SOURCE CURRENT AND TEMPERATURE

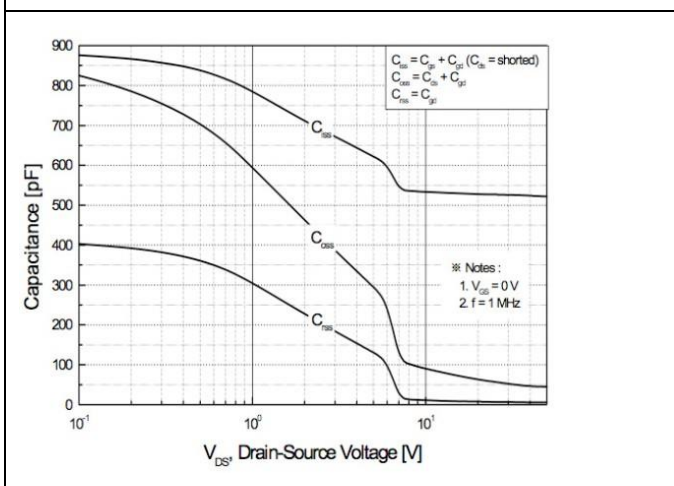


FIG.5-CAPACITANCE CHARACTERISTICS

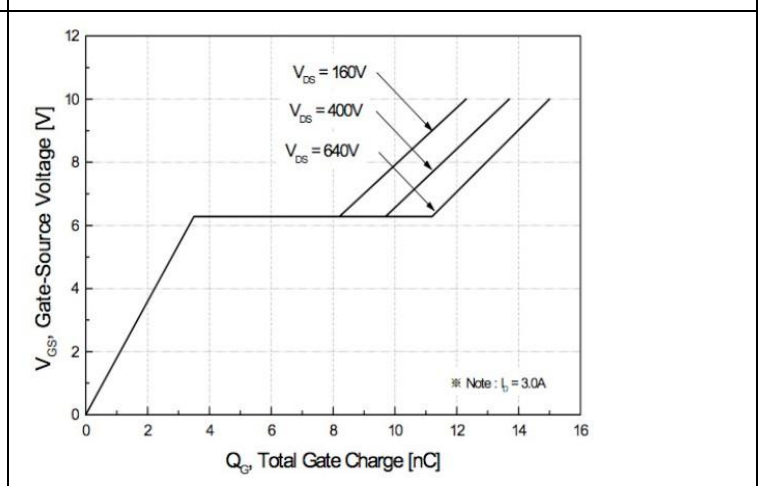


FIG.6-GATE CHARGE CHARACTERISTICS

MS6N80

800V N-Channel MOSFET

■ Characteristics Curve

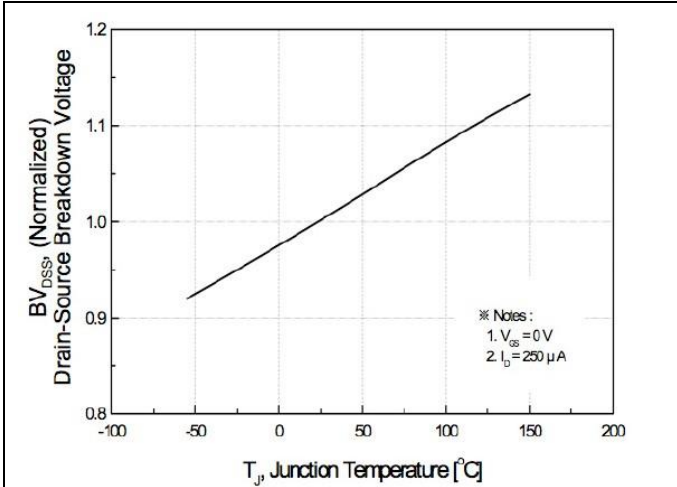


FIG.7-BREAKDOWN VOLTAGE VARIATION VS TEMPERATURE

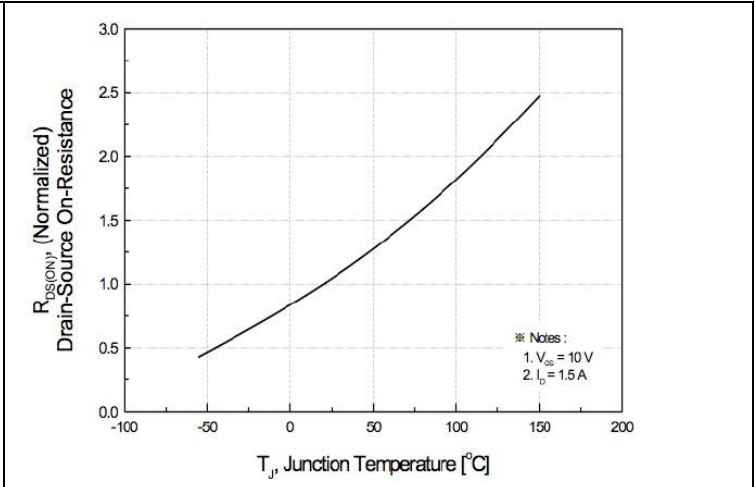


FIG.8-ON-RESISTANCE VARIATION VS TEMPERATURE

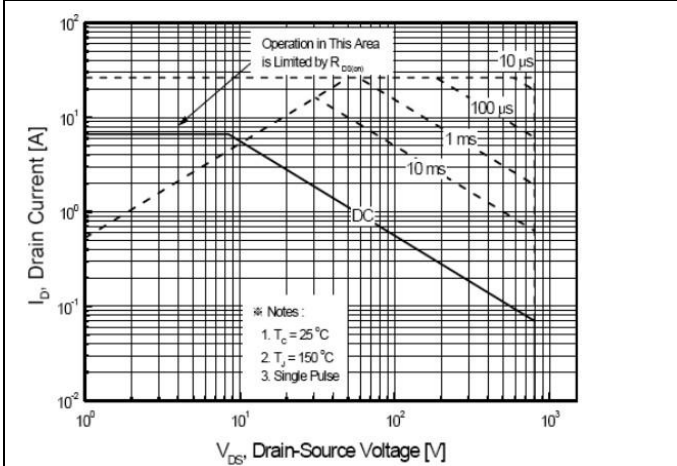


FIG.9-MAXIMUM SAFE OPERATING AREA

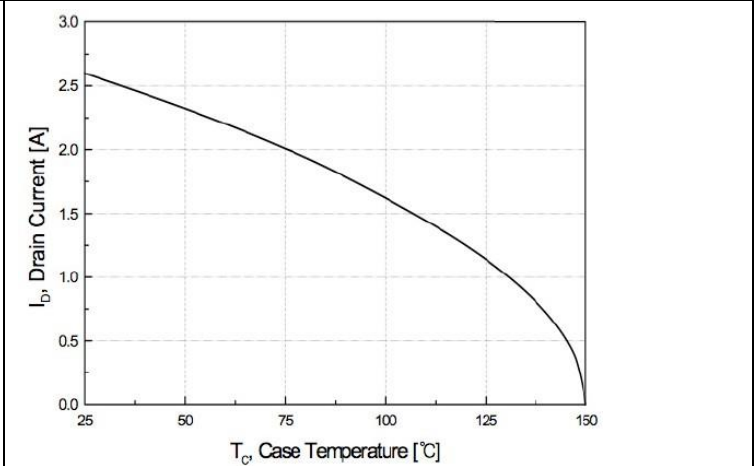


FIG.10-MAXIMUM DRAIN CURRENT VS CASE TEMPERATURE

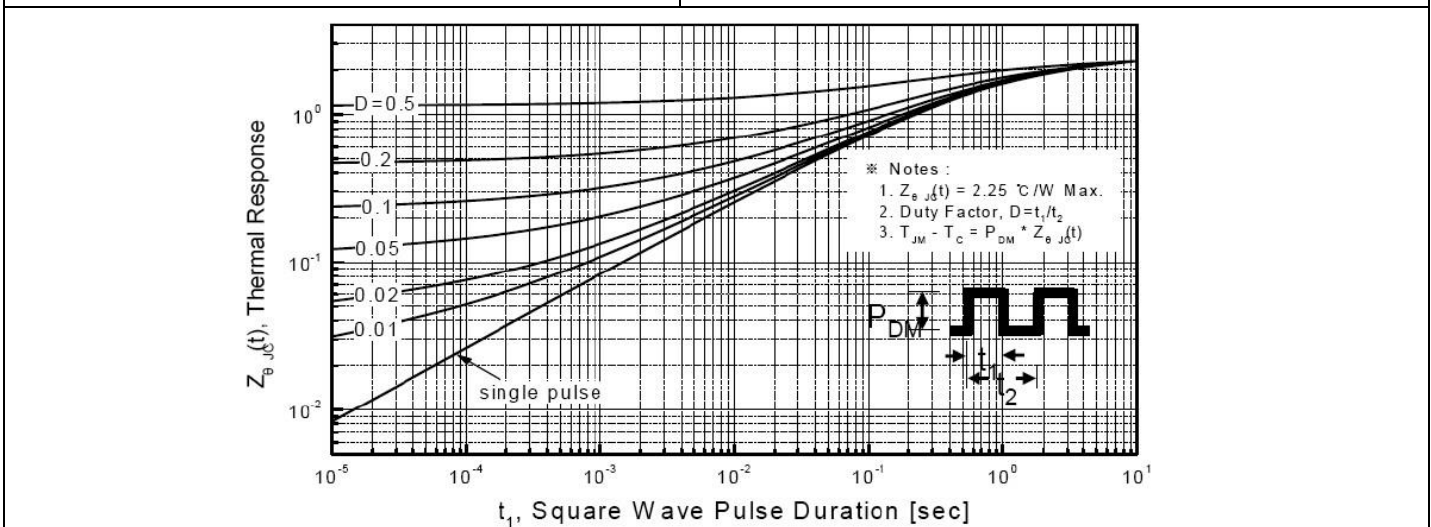


FIG.11-TRANSIENT THERMAL RESPONSE CURVE

MS6N80

800V N-Channel MOSFET

■ Characteristics Test Circuit & Waveform

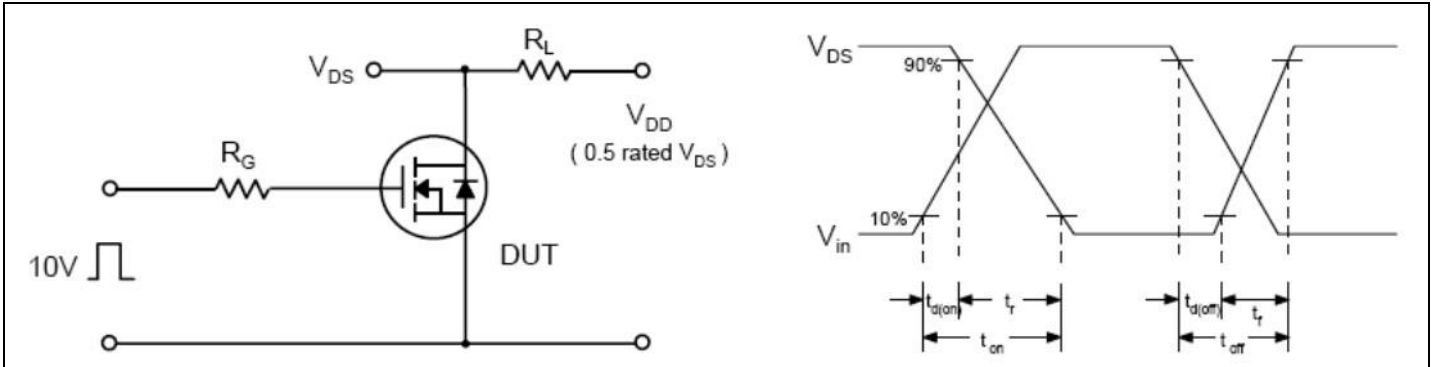


FIG.12-RESISTIVE SWITCHING TEST CIRCUIT & WAVEFORMS

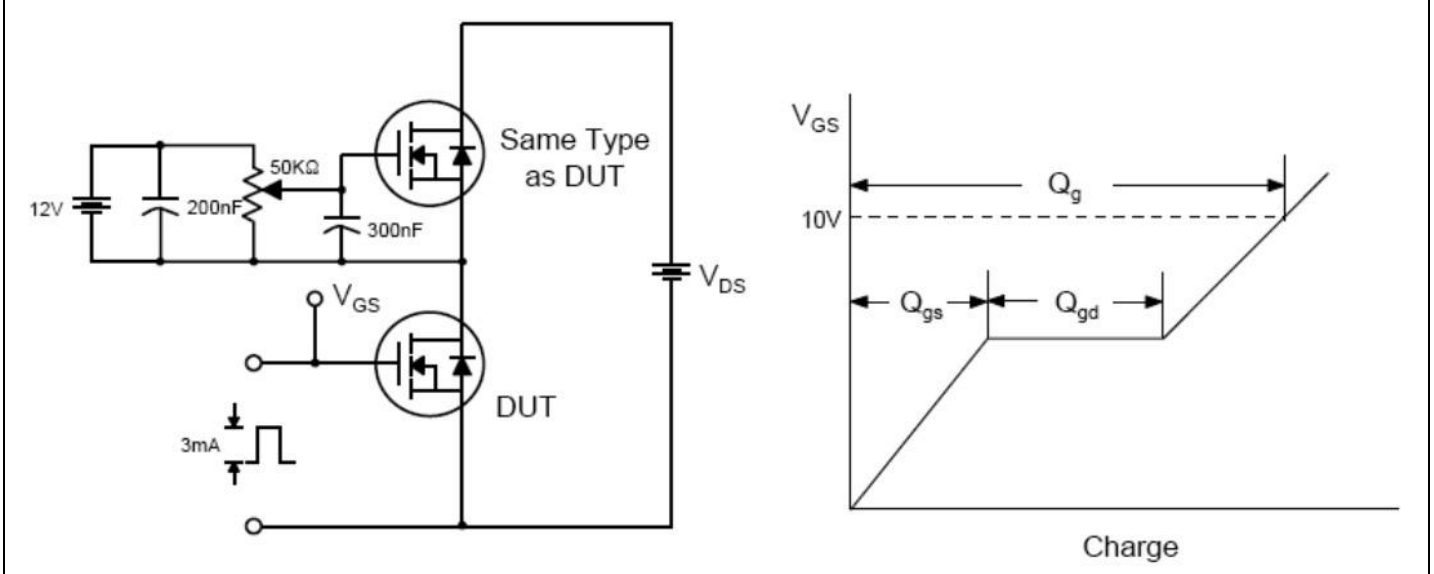


FIG.13-GATE CHARGE TEST CIRCUIT & WAVEFORM

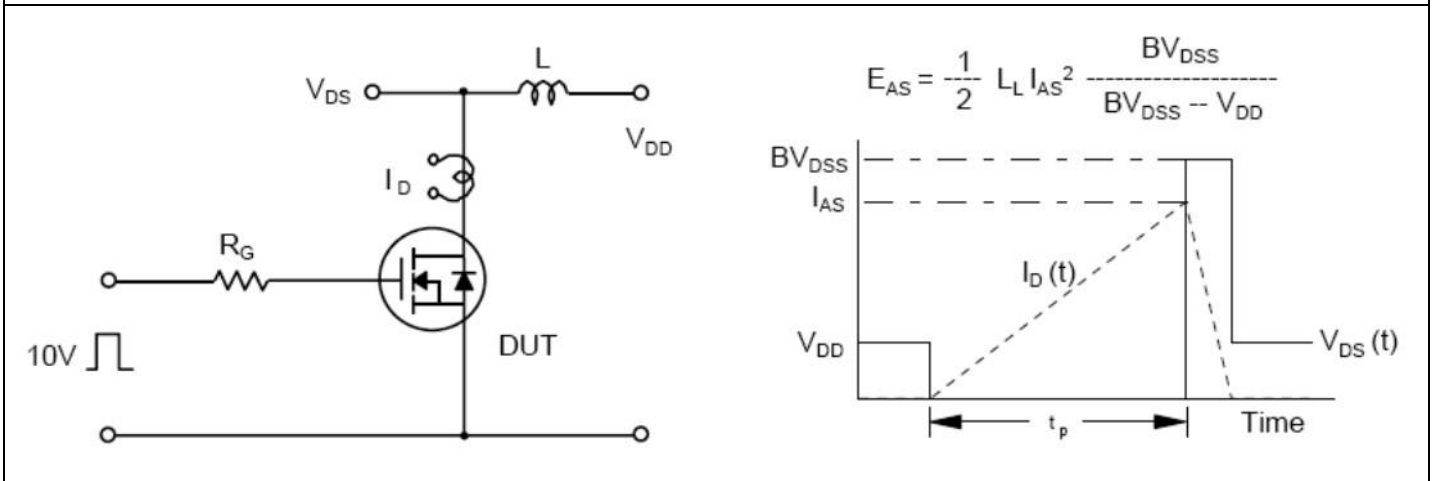


FIG.14-UNCLAMPED LINDUCTIVE SWITCHING TEST CIRCUIT & WAVEFORMS

MS6N80

800V N-Channel MOSFET

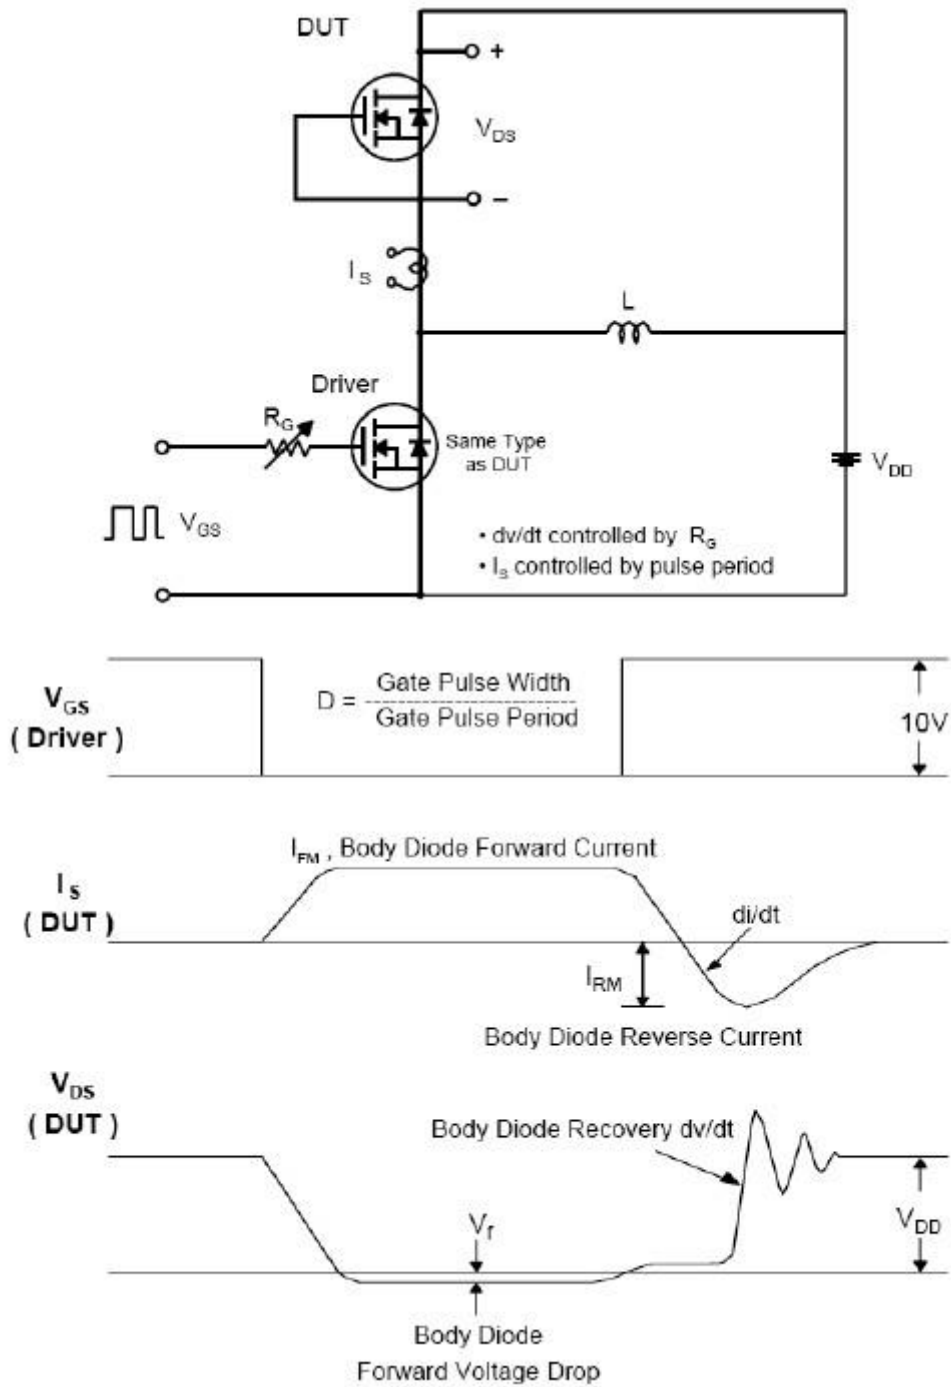


Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms

MS6N80

800V N-Channel MOSFET

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.