

Phase Control Thyristors

Features

1. 400 PT series Thyristors are designed for various power controls

2. Voltage rating up to 1800 V.

3. Typical application

- DC motor control
- Controlled DC power supplies
- AC controllers

Ordering code

400	PT	xx	A	0
(1)	(2)	(3)	(4)	(5)

(1) Maximum average on-state current , A

(2) For Phase Control Thyristor

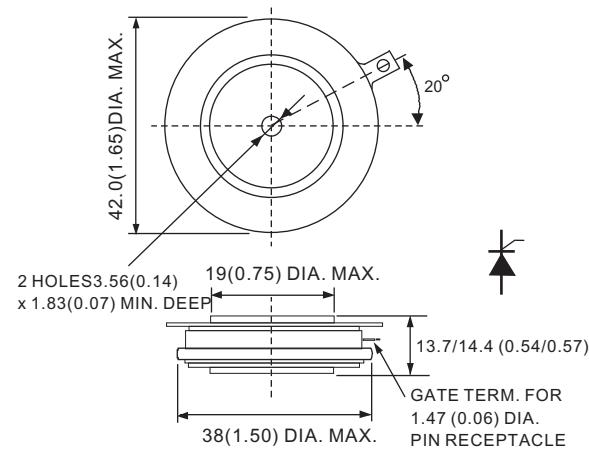
(3) Voltage code , code x 100 = V_{RRM} / V_{DRM}

(4) package style : A , B , C , D ,E for Disc Type

(5) Terminal types

0 - for eyelet

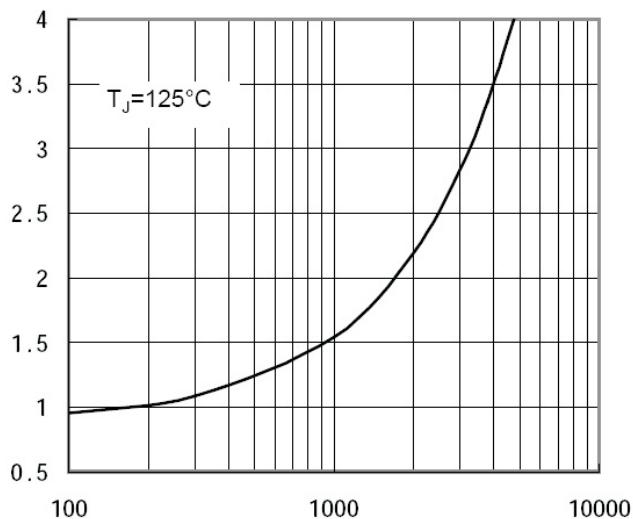
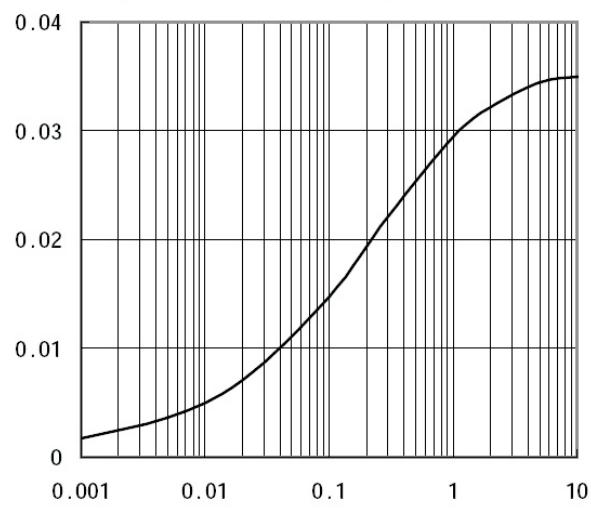
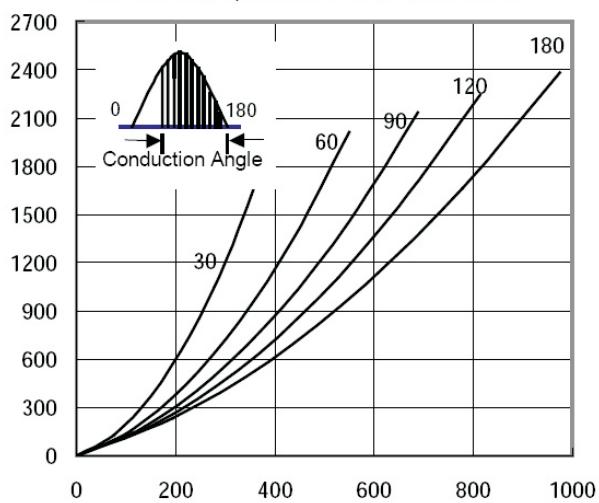
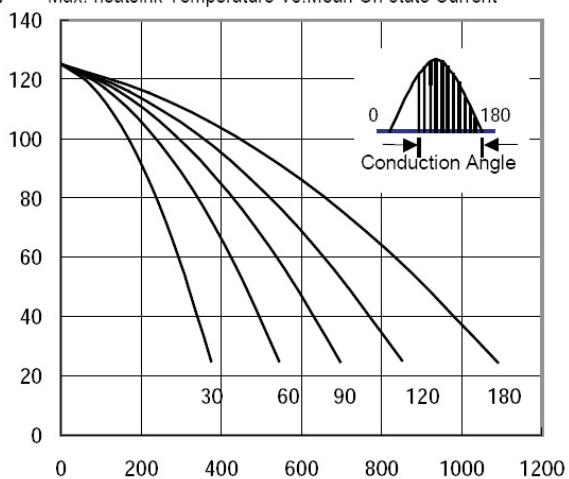
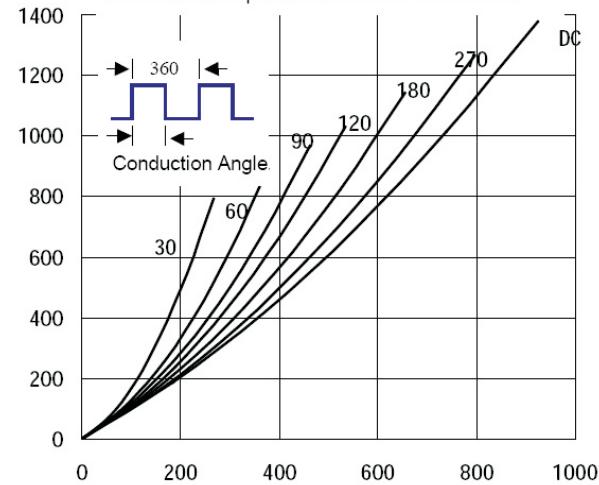
A TYPE



All dimensions in millimeters(inches)

Electrical Characteristics

Symbol	Parameter	Condition	Value			Unit
			Min.	Type	Max.	
$I_T(AV)$	Mean on-state current	180° half sine wave , 50Hz Double side cooled , $T_C = 55^\circ C$			400	A
$I_T(RMS)$	Max. RMS on-state current	Double side cooled , $T_{hs}=25^\circ C$			769	A
V_{RRM} V_{DRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} & V_{RRM}$ $t_p=10ms$ $V_{DsM} & V_{RsM} = V_{DRM} & V_{RRM} + 100V$	600		1800	V
I_{TSM}	Surge on-state current	10 ms half sine wave			5700	A
I_t^2	For fusing coordination	$V_R = 0.6V_{RRM}$			163	Ka ² s
$V_{T(TO)}$	Threshold voltage				0.92	V
r_t	On-state slope resistance				0.88	mΩ
V_{TM}	Max. Forward voltage drop	$I_{TM}=900A$, $F=8.0KN$			1.69	μV
I_H	Holding current	$V_A=12V$, $I_A=1A$			600	mA
d_i/dt	Critical rate of rise of turned-on current	Gate drive 20V , 20Ω , $t_r \leq 0.5 \mu s$			1000	A/μs
t_q	Typical turn-off time	$I_{TM}=400A$, $d_V/dt=30V/\mu s$ $d_{iRR}/dt=-10 A/\mu s$			100	μs
d_V/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67 V_{DRM}$			500	V/μs
P_G	Max. average gate power				2	W
P_{GM}	Max. peak gate power square	Square wave pulse width 100 μs			10	W
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	90		150	mA
V_{GT}	Gate trigger voltage		1.8		3	V
T_{stg}	Storage temperature		- 40		140	°C
T_j	Max.operating temperature range		- 40		125	°C
$R_{th(j-h)}$	Thermal resistance(junction to heatsink)	Double side cooled , clamping force 8.0 KN			0.17	°C/ W
F_m	Mounting force		4		5	KN
W_t	Approximate weight			50		g

Fig. 1 Peak On-state Voltage Vs. Peak On-state Current

Fig. 2 Max. junction To heatsink Thermal Impedance Vs. Time

Fig. 3 Max. Power Dissipation Vs. Mean On-state Current

Fig. 4 Max. heatsink Temperature Vs. Mean On-state Current

Fig. 5 Max. Power Dissipation Vs. Mean On-state Current

Fig. 6 Max. heatsink Temperature Vs. Mean On-state Current
