

## Phase Control Thyristors (Stud Type), 56A

### Features

- Improved glass passivation for high reliability
- Exceptional stability at high temperatures
- High di/dt and dv/dt capabilities
- Metric thread type available
- Low thermal resistance


Electrical Ratings ( $T_A = 25^0\text{C}$ , unless otherwise noted)			
Parameters	Symbol	Values	Units
Maximum on-state average current $180^0$ sinusoidal conduction @ $T_A = 85^0\text{C}$	$I_{T(AV)}$	55	A
Maximum RMS on-state current	$I_{T(RMS)}$		A
Maximum peak, one cycle non-repetitive surge current	$I_{TSM}$	900	A
Maximum $I^2t$ for fusing	$I^2t$	800	$\text{A}^2\text{s}$
Maximum repetitive peak on and off-state voltage range	$V_{RRM}, V_{DRM}$	200 to 1600	V
Maximum peak on-state voltage ( $T_A = 25^0\text{C}$ , $I_{peak} = 79\text{A}$ )	$V_{TM}$	1.2	V
Maximum holding current @ $T_A$	$I_H$	150	mA
Maximum latching current @ $T_A$	$I_L$	400	mA
Maximum rate of rise of turn-on current, $V_{DRM} \leq 600\text{V}$	di/dt	200	$\text{A}/\mu\text{s}$
Critical rate of rise of off-state voltage	$T_A = T_A$ maximum, 100% $V_{DRM}$	100	$\text{V}/\mu\text{s}$
		300	
Maximum gate current required to trigger	$I_{GT}$	100	mA
Maximum gate voltage required to trigger	$V_{GT}$	2.0	V



TO-208AC (TO-65)

Thermal and Mechanical Specifications ( $T_A = 25^0\text{C}$ , unless otherwise noted)			
Parameters	Symbol	Values	Units
Maximum operating junction temperature range	$T_J$	- 60 to +125	$^0\text{C}$
Maximum storage temperature range	$T_{Stg}$	- 60 to +125	$^0\text{C}$
Maximum thermal resistance, junction to case	$R_{th(JC)}$	0.6	$^0\text{C}/\text{W}$
Mounting torque	F	0.2(min) to 0.3(max)	mkg
Approximate weight	W	14	g

## Package Outline

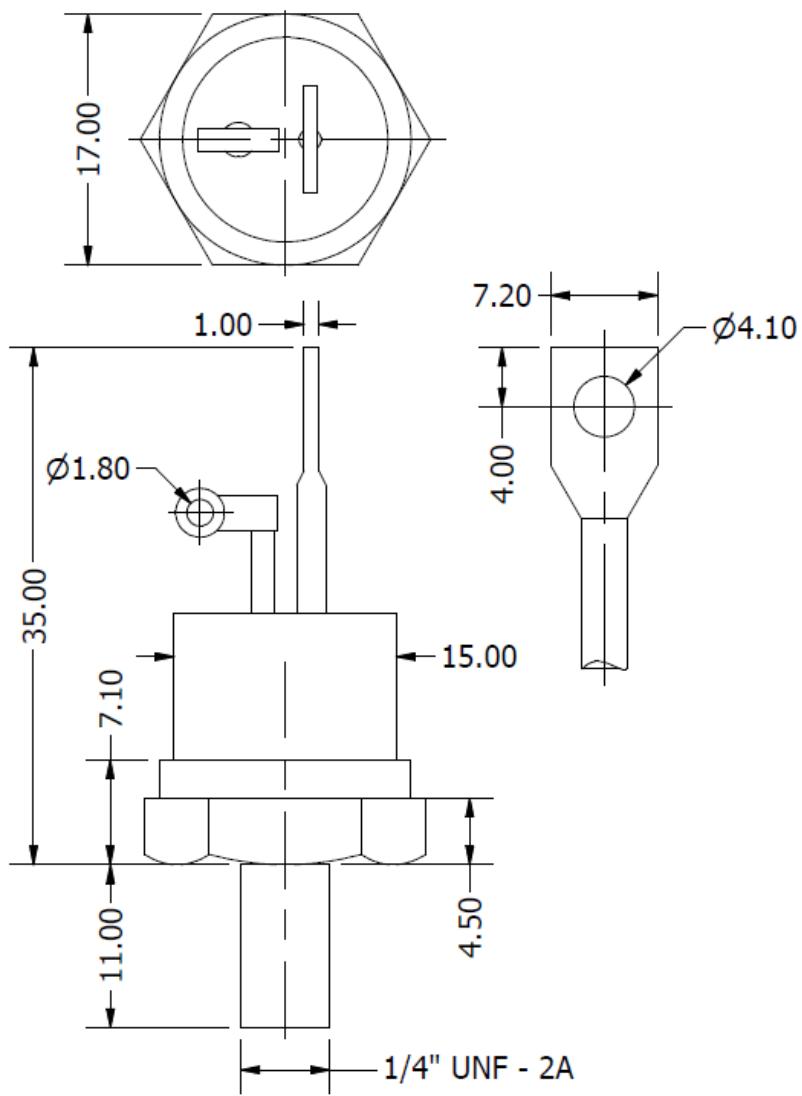

ALL DIMENSIONS IN MM