


### Features

- Interdigitated amplifying gates
- Fast turn-on and high di/dt
- Low switching losses

### Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters

$I_{T(AV)}$	<b>1920A</b>
$V_{DRM}/V_{RRM}$	<b>1900~2500V</b>
$t_q$	<b>40~80μs</b>
$I_{TSM}$	<b>21 kA</b>
$I^2t$	<b>2205 10<sup>3</sup>A<sup>2</sup>S</b>

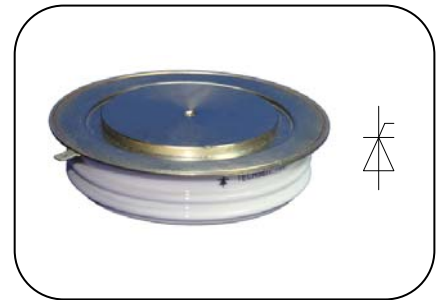

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T <sub>J</sub> (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1920	A
						1300	
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM}&V_{RRM}$ , tp=10ms $V_{DSM}&V_{RSM}=V_{DRM}&V_{RRM}+100V$	125	1900		2500	V
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	$V_D=V_{DRM}$ $V_R=V_{RRM}$	125			140	mA
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			21	kA
$I^2t$	I <sup>2</sup> T for fusing coordination					2205	A <sup>2</sup> s*10 <sup>3</sup>
$V_{TO}$	Threshold voltage	$I_{TM}=3600A$ , F=32kN	125			1.48	V
$r_T$	On-state slop resistance					0.28	mΩ
$V_{TM}$	Peak on-state voltage					2.49	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			500	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to2500A Gate pulse t <sub>r</sub> ≤0.5μs I <sub>GM</sub> =1.5A	125			1200	A/μs
Q <sub>rr</sub>	Recovery charge	$I_{TM}=2000A$ , tp=2000μs, di/dt=-60A/μs, V <sub>R</sub> =50V	125		1360		μC
t <sub>q</sub>	Circuit commutated turn-off time	$I_{TM}=1500A$ , tp=1000μs, V <sub>R</sub> =50V dv/dt=30V/μs, di/dt=-20A/μs	125	40		80	μs
I <sub>GT</sub>	Gate trigger current	$V_A=12V$ , I <sub>A</sub> =1A	25	40		450	mA
V <sub>GT</sub>	Gate trigger voltage			0.9		4.5	V
I <sub>H</sub>	Holding current			20		800	mA
V <sub>GD</sub>	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	0.3			V
R <sub>th(j-c)</sub>	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 32kN				0.013	°C /W
R <sub>th(c-h)</sub>	Thermal resistance case to heat sink					0.0035	
F <sub>m</sub>	Mounting force			27		34	kN
T <sub>stg</sub>	Stored temperature			-40		140	°C
W <sub>t</sub>	Weight					820	g
Outline	KT60cT65						

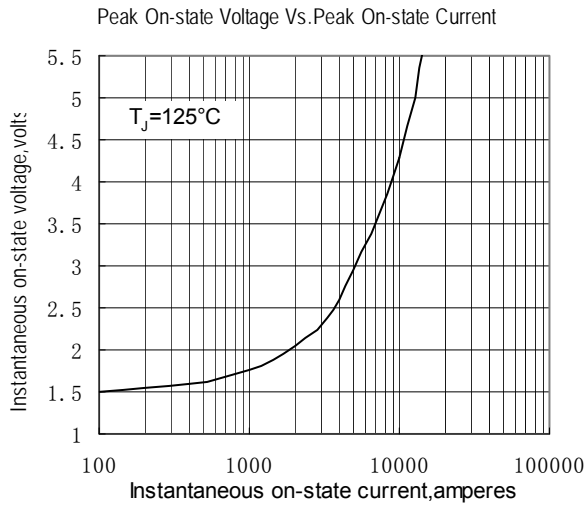


Fig.1

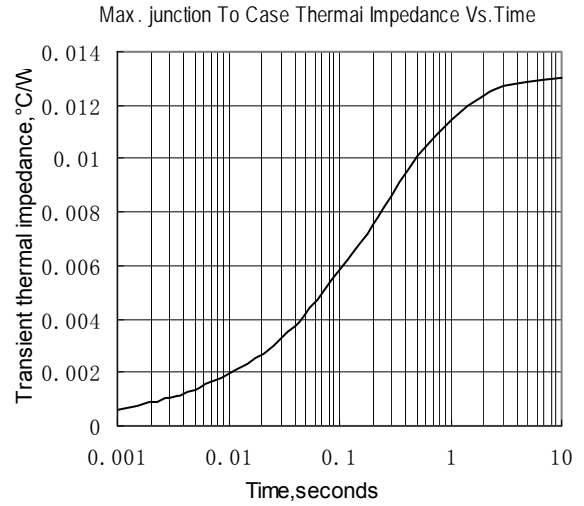


Fig.2

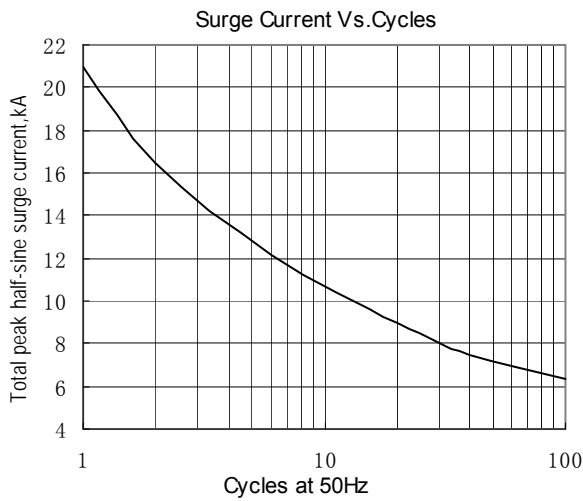


Fig.3

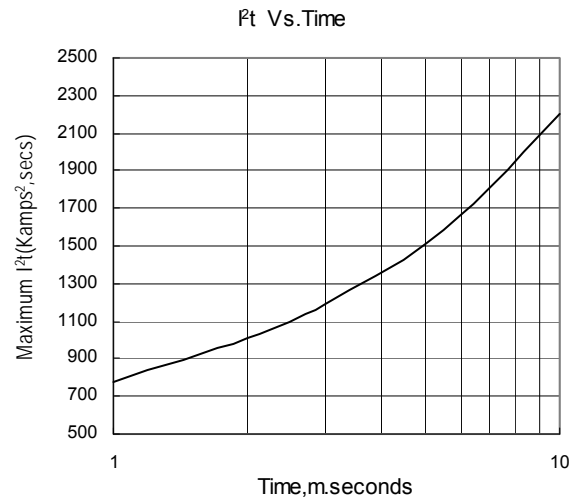


Fig.4

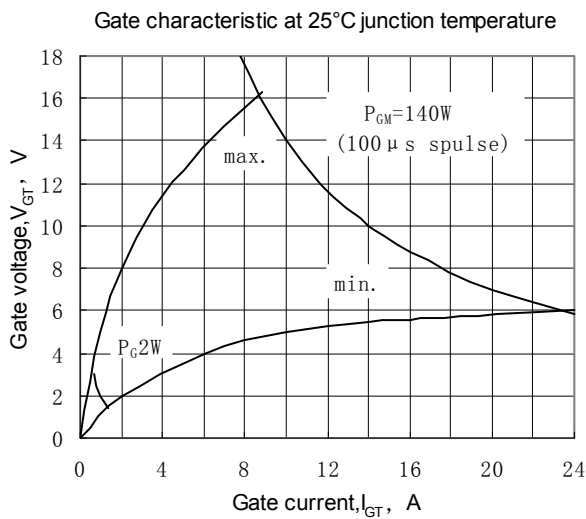


Fig.5

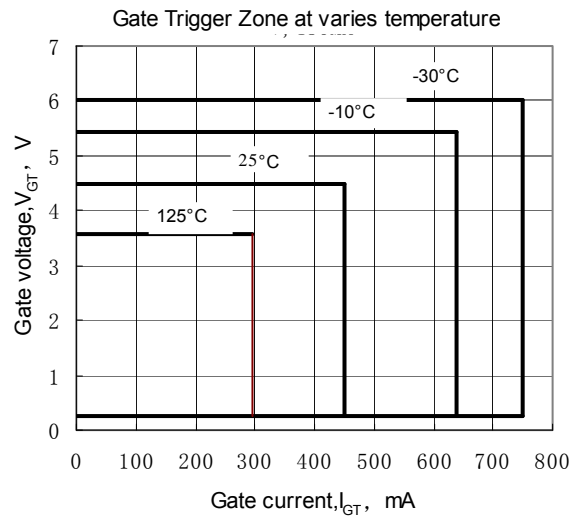


Fig.6

**Outline:**

