

Features:

- Interdigitated amplifying gates
- Fast turn-on and high dI/dt
- Low switching losses
- Short turn-off time
- Hermetic metal cases with ceramic insulators

Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters
- AC motor speed control
- General power switching applications

$I_{T(AV)}$ **1010A**
 V_{DRM}/V_{RRM} **1200~1600V**
 t_q **18~36μs**
 I_{TSM} **11kA**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS		$T_j(^{\circ}C)$	VALUE			UNIT
					Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	$T_c=55^{\circ}C$ $T_c=85^{\circ}C$	125			1010	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$, $tp=10ms$ $V_{DSM} \& V_{RSM}=V_{DRM} \& V_{RRM}+100V$	125		1200		1600	
I_{DRM} I_{RRM}	Repetitive peak off-state current Repetitive peak reverse current	$V_D=V_{DRM}$ $V_R=V_{RRM}$	125				50	mA
I_{TSM}	Surge on-state current	10ms half sine wave	$V_R=0.6V_{RRM}$	125			11	kA
I^2t	I^2T for fusing coordination					605	A^2s*10^3	
V_{TO}	Threshold voltage			125			1.70	V
r_T	On-state slop resistance						0.48	$m\Omega$
V_{TM}	Peak on-state voltage	$I_{TM}=1800A$, $F=21kN$		125			2.56	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$		125			200	$V/\mu s$
di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 1600A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$		125			1500	$A/\mu s$
Q_{rr}	Recovery charge	$I_{TM}=1000A$, $tp=2000\mu s$, $di/dt=-60A/\mu s$, $V_R=50V$		125		83	100	μC
t_q	Circuit commutated turn-off time	$I_{TM}=800A$, $tp=1000\mu s$, $V_R=50V$ $dv/dt=30V/\mu s$, $di/dt=-20A/\mu s$		125	18		36	μs
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$		25	30		250	mA
V_{GT}	Gate trigger voltage				0.8		3.0	V
I_H	Holding current				20		400	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$		125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 21kN					0.024	$^{\circ}C / W$
$R_{th(c-h)}$	Thermal resistance case to heat sink						0.006	
F_m	Mounting force				18		25	kN
T_{stg}	Stored temperature				-40		140	$^{\circ}C$
W_t	Weight					3800		g
Outline		KT44ct						

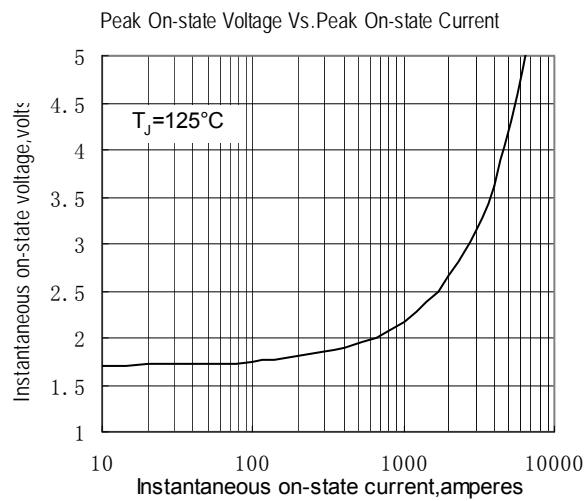


Fig.1

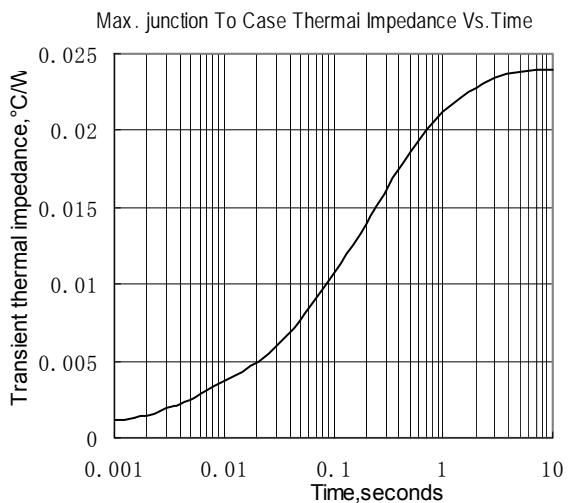


Fig.2

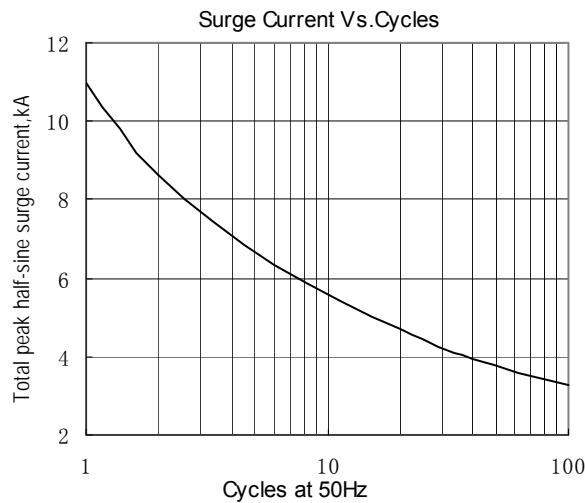


Fig.3

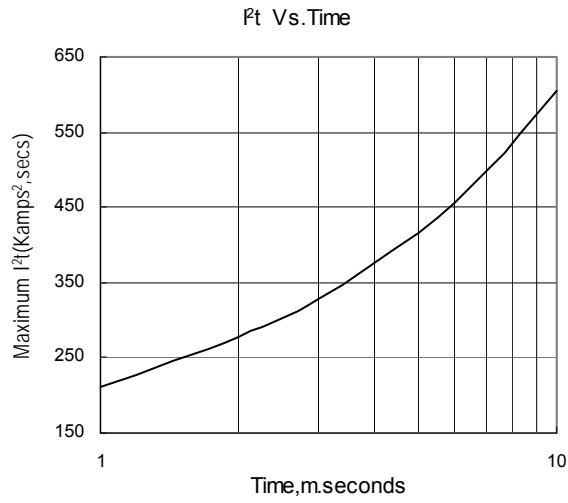


Fig.4

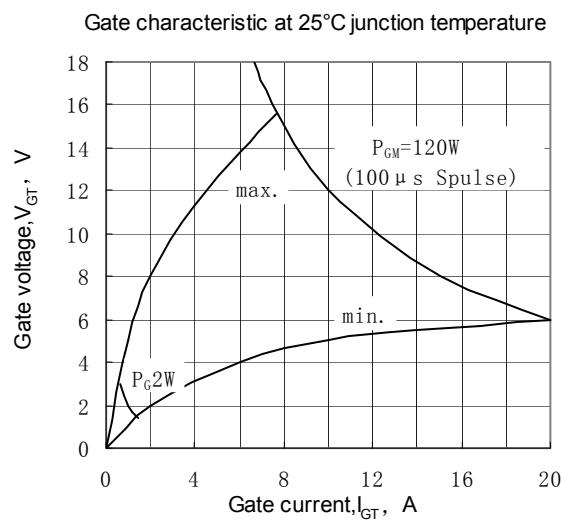


Fig.5

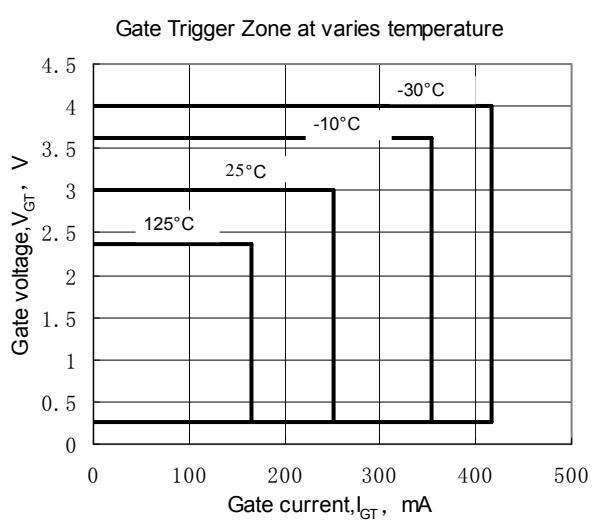


Fig.6

Outline: