

Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$	2000 A
V_{RRM}	5600~6500 V
I_{FSM}	35 kA
I^2t	6150 $10^3 A^2S$



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT		
				Min	Type	Max			
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	150 $T_c=55^{\circ}C$ $T_c=100^{\circ}C$			2970	A		
						2000			
V_{RRM}	Repetitive peak reverse voltage	V_{RRM} tp=10ms		150	5600	6500	V		
I_{RRM}	Repetitive peak current	$V_{RM}=V_{RRM}$		150		300	mA		
I_{FSM}	Surge forward current	10ms half sine wave		150		35	kA		
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				6150	A^2s*10^3		
V_{FO}	Threshold voltage			150		0.94	V		
r_F	Forward slop resistance					0.27	mΩ		
V_{FM}	Peak on-state voltage	$I_{FM}=3000A, F=40kN$		150		1.80	V		
Q_{rr}	Recovery charge	$I_{FM}=2000A, tp=2000\mu s, di/dt=-5A/\mu s, V_R=50V$		150		6500	μC		
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 40kN				0.011	°C /W		
$R_{th(c-h)}$	Thermal resistance case to heatsink					0.003			
F_m	Mounting force				35	40	47	kN	
T_{stg}	Stored temperature				-40		160	°C	
W_t	Weight					1200		g	
Outline	ZT73dT								

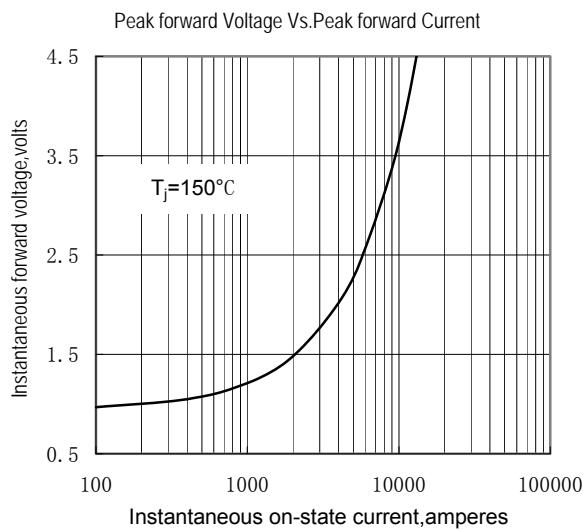


Fig.1

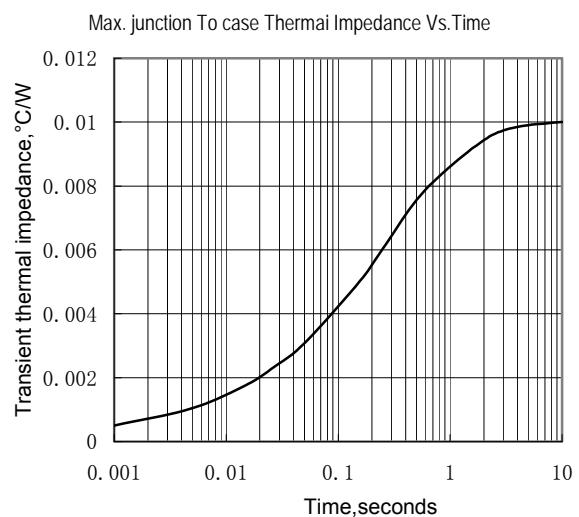


Fig.2

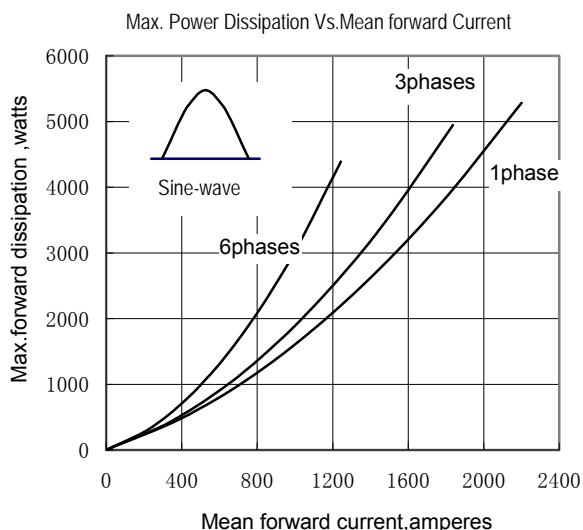


Fig.3

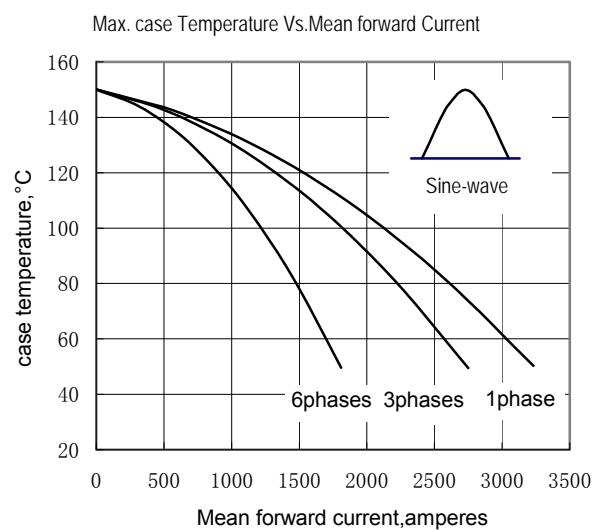


Fig.4

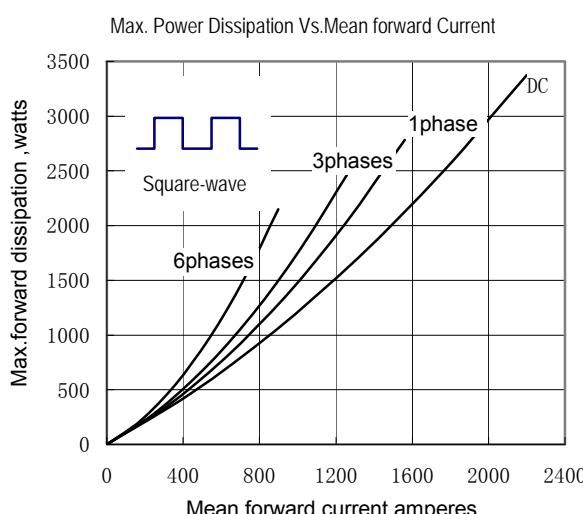


Fig.5

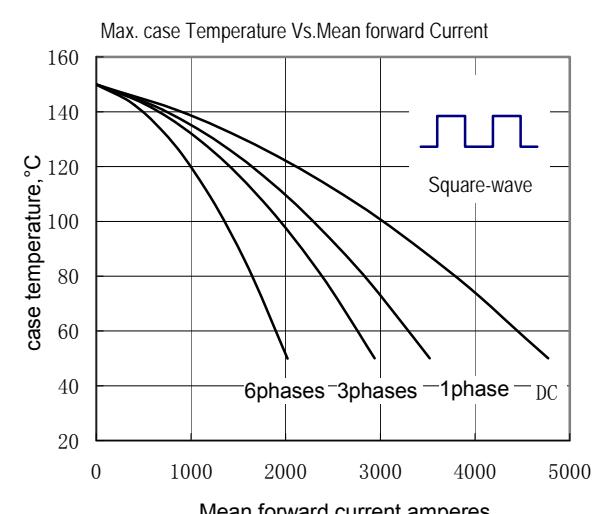


Fig.6

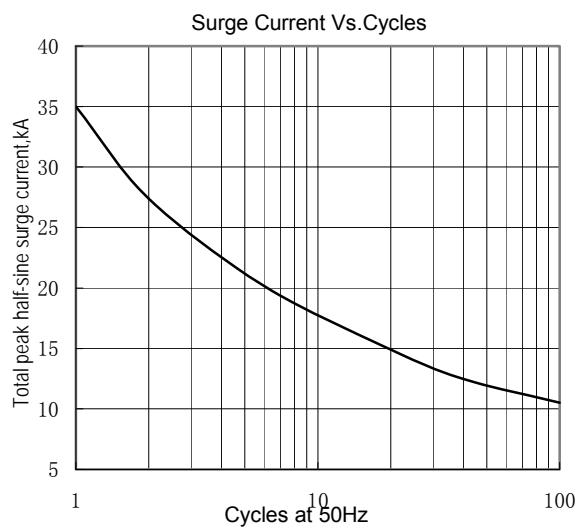


Fig.7

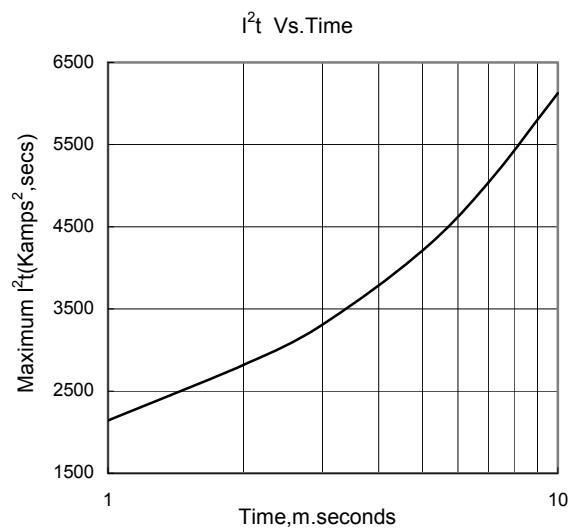


Fig.8

Outline: