


Features:

- High power
- High reliability
- Low price, Long life

Typical Applications:

- Generator for power exciter
- laser pumping
- Pulse energization of electrostatic precipitator

I_p **50 KA**
 V_{DRM} **1500-1800V**
 I_{TSM} **5 KA**

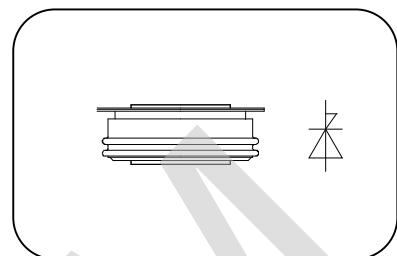

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	VALUE			UNIT
			Min	Type	Max	
I_p	Repetitive peak current	$T_j=25^\circ\text{C}$ $I_{RT}=250\text{A}$ $t_p=50\mu\text{s}$			50	KA
V_{DRM}	Repetitive peak off-state voltage	$T_j=25^\circ\text{C}$	1500		1800	V
I_{TSM}	Surge on-state current	$T_j=25^\circ\text{C}$ $t_p=10\text{ms}$			5	KA
V_{TM}	Peak forward voltage	$T_j=25^\circ\text{C}$ $I_p=50\text{KA}$ $t_p=50\mu\text{s}$			20	V
dv/dt	Critical rate of rise of off-state voltage				0.8	KV/ μs
di/dt	Critical rate of rise of on-state current	$T_j=25^\circ\text{C}$ $t_p=50\mu\text{s}$			15	KA/ μs
I_{RT}	Reverse peak trigger current			0.25		KA
T_T	peak trigger current duration		1.5		2.5	μs
t_q	Circuit commutated turn-off time			60		μs
F_m	Mounting force		10		20	KN
Outline		ZT33aT				

Outline
