

### Features:

- Isolated mounting base 3600V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings

### Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

$I_{F(AV)}$       **300A**  
 $V_{RRM}$       **2600~3600V**  
 $I_{FSM}$       **10 A $\times$ 10<sup>3</sup>**  
 $I^2t$       **500A<sup>2</sup> S $\times$ 10<sup>3</sup>**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j$ (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^\circ C$	150			300	A
$I_{F(RMS)}$	RMS forward current		150			471	A
$V_{RRM}$	Repetitive peak reverse voltage	$V_{RRM}$ tp=10ms $V_{RsM}=V_{RRM}+100V$	150	2600		3600	V
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			45	mA
$I_{FSM}$	Surge forward current	10ms half sine wave $V_R=0.6V_{RRM}$	150			10	KA
$I^2t$	$I^2T$ for fusing coordination					500	A <sup>2</sup> s*10 <sup>3</sup>
$V_{FO}$	Threshold voltage		150			0.95	V
$r_F$	Forward slop resistance					0.70	mΩ
$V_{FM}$	Peak forward voltage	$I_{FM}=900A$	25			1.85	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled				0.110	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled				0.04	°C /W
$V_{iso}$	Isolation voltage	50Hz,R.M.S,t=1min, $I_{iso}:1mA(max)$	3600				V
$F_m$	Terminal connection torque(M8)				12		N·m
	Mounting torque(M6)				6		N·m
$T_{stg}$	Stored temperature			-40		125	°C
$W_t$	Weight				1350		g
Outline	415F3/417F2						

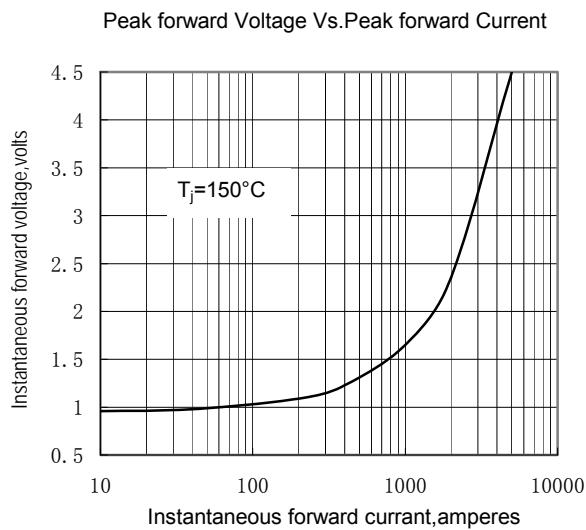


Fig.1

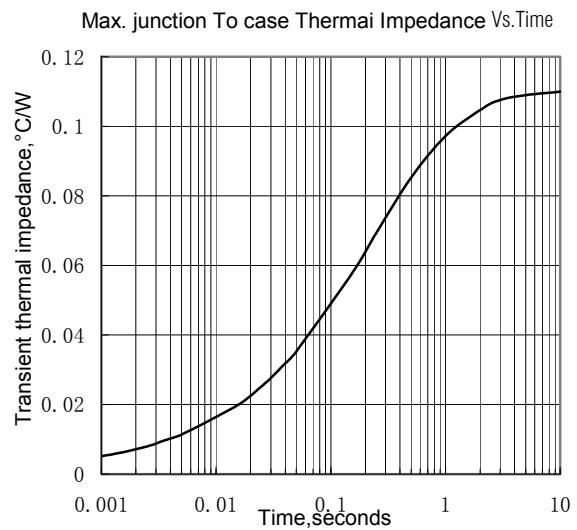


Fig.2

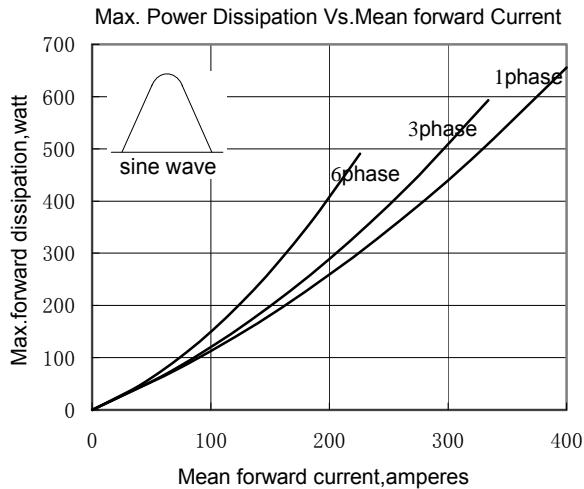


Fig.3

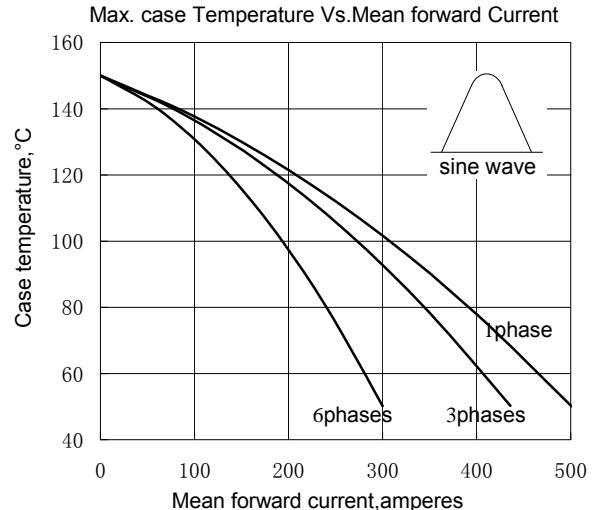


Fig.4

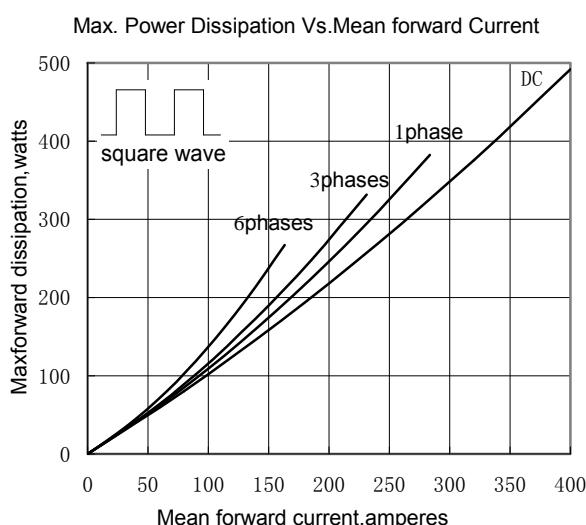


Fig.5

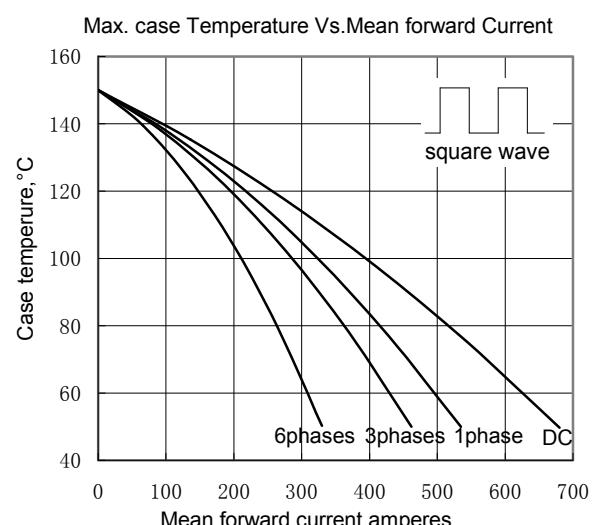


Fig.6

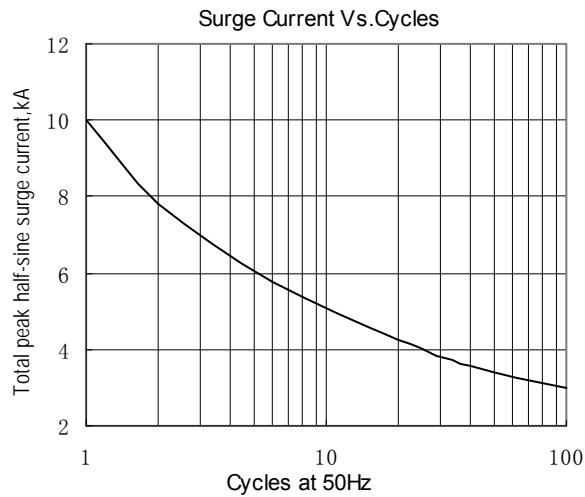


Fig.7


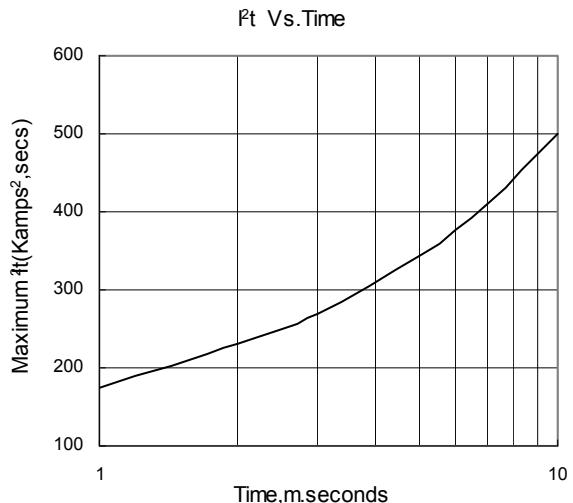


Fig.8

## Outline:



415F3

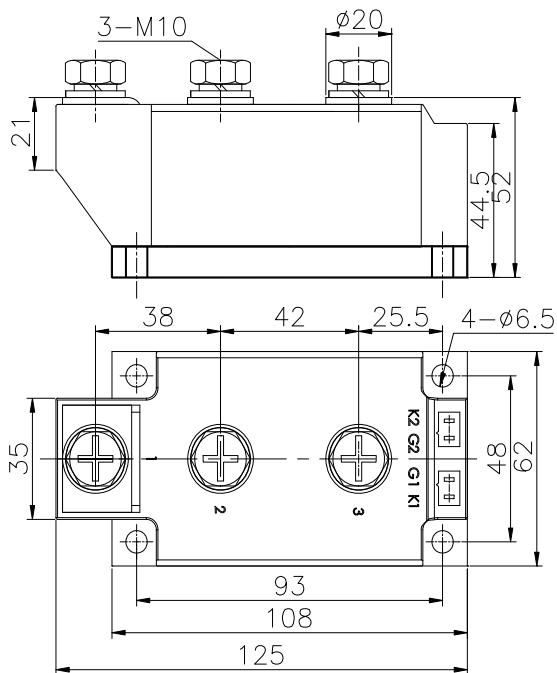