


PRELIMINARY DATASHEET
**Fast Recovery 60A, 600V Epitaxial Diodes,
 in TO247 B1 version**
APPLICATIONS

- Freewheeling diode (FWD)
- Snubber diode
- Clamp diode
- Power factor correction (PFC)
- Plating power supply
- Ultrasonic cleaner and welder
- Converter and chopper
- Uninterruptible power supplies
- High speed rectifiers
- Inductive heating and melting applications


FEATURES

- Ultrafast recovery time
- Soft recovery characteristics
- Low recovery loss
- Low forward voltage
- High surge current capability
- Low leakage current
- Pb-free finished; **RoHS compliant**

MAXIMUM RATINGS, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Units
Repetitive peak reverse voltage	V_{RRM}	600	V
Average forward current $T_c = 110^\circ\text{C}$	$I_{F(AV)}$	60	A
Surge non-repetitive forward current $T_j = 45^\circ\text{C}$, $t_p = 10$ ms, 50Hz, Sine	I_{FSM}	600	
Power dissipation	P_D	250	W
Operating junction and storage temperature	T_j, T_{stg}	-40... +150	$^\circ\text{C}$

Thermal Characteristics


Parameter	Symbol	Max. Value	Units
Characteristics			
Thermal resistance, junction to case	R_{thJC}	0.5	$^\circ\text{C}/\text{W}$

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Static Characteristics					
Reverse leakage current $V_R = 600\text{V}$ $V_R = 600\text{V}$, $T_j = 125^\circ\text{C}$	I_R	-	-	250 500	μA
Forward voltage drop $I_F = 60\text{A}$ $I_F = 60\text{A}$, $T_j = 125^\circ\text{C}$	V_F	-	1.3 1.1	1.8 -	V

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Dynamic Characteristics					
Reverse recovery time $V_R = 30\text{V}$, $I_F = 1\text{A}$, $di_F/dt = -200\text{A}/\mu\text{s}$	t_{rr}	-	40	-	ns
$V_R = 300\text{V}$, $I_F = 60\text{A}$, $di_F/dt = -200\text{A}/\mu\text{s}$		-	85	-	
$V_R = 300\text{V}$, $I_F = 60\text{A}$, $di_F/dt = -200\text{A}/\mu\text{s}$, $T_j = 125^\circ\text{C}$		-	220	-	
Maximum reverse recovery current $V_R = 300\text{V}$, $I_F = 60\text{A}$, $di_F/dt = -200\text{A}/\mu\text{s}$	I_{rrm}	-	11	-	A
$V_R = 300\text{V}$, $I_F = 60\text{A}$, $di_F/dt = -200\text{A}/\mu\text{s}$, $T_j = 125^\circ\text{C}$		-	22	-	

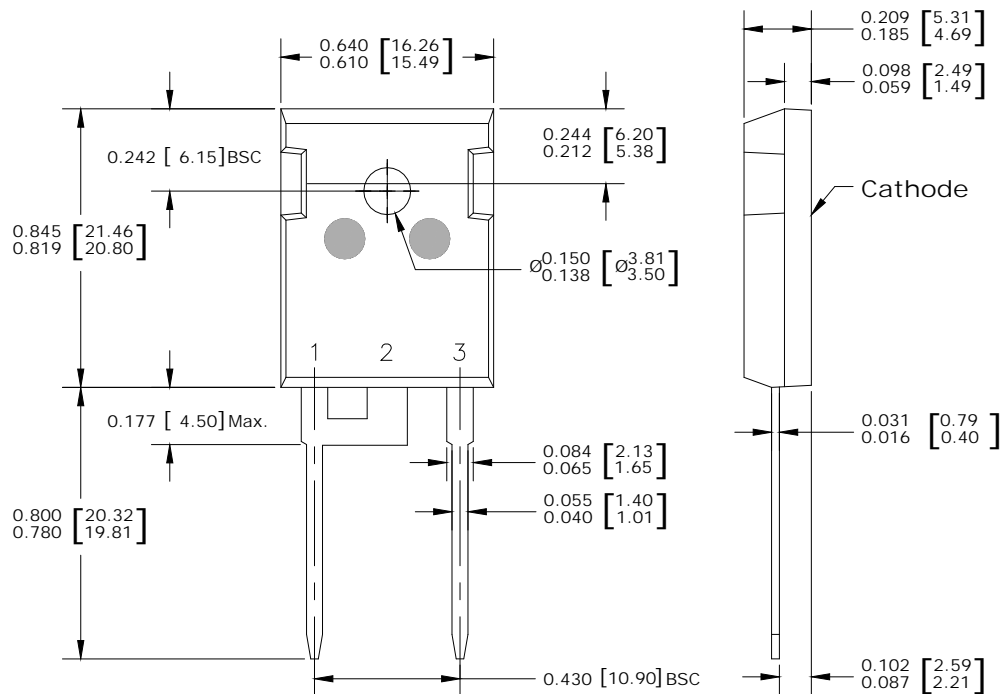Package Outline Drawing

Disclaimer

These specifications may not be considered as a guarantee of components characteristics. Components have to be tested depending on intended application as adjustments may be necessary. The use of **iQXPRZ Power Inc.** components in life support appliances and systems are subject to written approval of **iQXPRZ Power Inc.**