



Over 150 million die shipped per year


G172 Chip Family

NPN Bipolar

DESCRIPTION	FEATURES
<p>The G172 chip family is an NPN bipolar multi-epitaxial planar transistor using SEMEFAB's ADVANCED DISTRIBUTED BASE TECHNOLOGY for improved performance over full temperature range.</p>	<ul style="list-style-type: none"> • HIGH CURRENT - UP TO 50 AMPS • HIGH VOLTAGE - UP TO 1200 VOLTS (V_{CBO}) • VERY FAST SWITCHING ($t_f = 50ns$) • IMPROVED PERFORMANCE OVER FULL TEMPERATURE RANGE <ul style="list-style-type: none"> ○ HIGH GAIN AT LOW TEMPERATURES ○ FAST SWITCHING AT HIGH TEMPERATURES

1.0 PHYSICAL FEATURES

DIE SIZE	229 mils x 229 mils
DIE THICKNESS	550 micron
FRONT METALLISATION	5 micron Aluminium
BACK METALLISATION	0.6 micron Aluminium/Titanium/Nickel/Gold
BOND PAD SIZE	
Emitter	20 mils x 48 mils
Base	18 mils x 53 mils

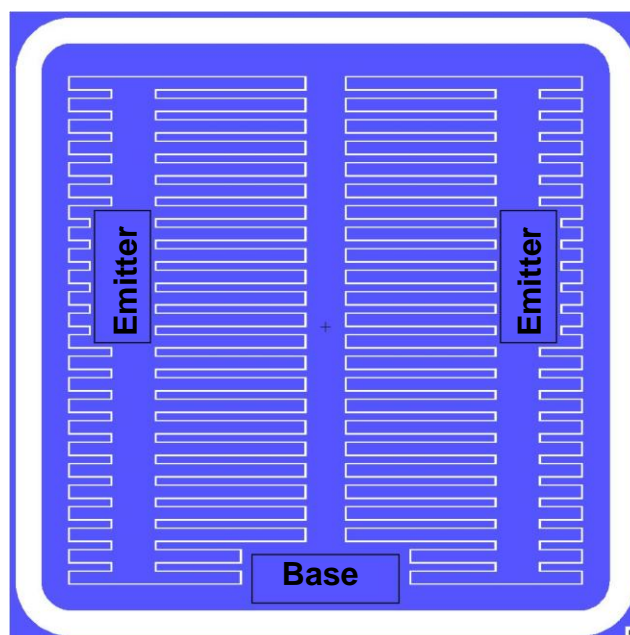



G172 Chip Family

NPN Bipolar

2.0 TYPICAL CHARACTERISTICS

	G572	G672	G372	G272	GB72	GC72	Unit
V_{CBO}	200	250	400	600	900	1200	V
V_{CEO}	85	120	200	285	550	650	V
I_C	50	45	35	30	15	10	A
Similar to				BUL49B	BUL48B	BUL48A	

3.0 PROBED ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Unit
V_{CEO}	Collector - Emitter Breakdown Voltage	$I_C = 1\text{mA}$ $I_B = 0$	GC72	600	650		V
			GB72	460	550		
			G272	280	285		
			G372	179	200		
			G672	116	120		
			G572	79	85		
I_{CES}	Collector Cut-Off Current	$V_{CEO} = 600\text{V}$ $V_{CEO} = 460\text{V}$ $V_{CEO} = 280\text{V}$ $V_{CEO} = 179\text{V}$ $V_{CEO} = 116\text{V}$ $V_{CEO} = 79\text{V}$	GC72			1	mA
			GB72				
			G272				
			G372				
			G672				
			G572				
I_{EBO}	Emitter-Base Cut-Off Current	$V_{EB} = 11\text{V}$ $I_C = 0$	ALL			1	mA
hfe	DC Current Gain	$I_C = 1\text{A}$ $V_{CE} = 5\text{V}$	GC72	20		45	
			GB72				
			G272				
			G372	40		90	
			G672				
			G572				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 1\text{A}$ $I_B = 0.1\text{A}$	ALL			0.15	V



G172 Chip Family

NPN Bipolar

Semefab Ltd. may change this specification at any time without notification.

Supply of products conforms to Semefab Ltd.'s Terms and Conditions.

LIFE SUPPORT APPLICATIONS

This product is not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury.

Semefab Ltd. customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Semefab Ltd. for any damages resulting from such improper use or sale.