


IGBT Module

Features

- Low VCE (sat) trench IGBT
- Low switching losses
- 10us short circuit capability
- Fast & soft reverse recovery FRD
- Maximum junction temperature 175°C
- Temperature sense included
- Industry standard package with soldering pins for PCB mounting

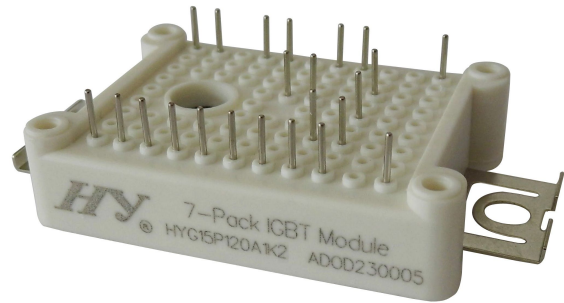

Typical Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

IGBT-inverter $T_c=25^\circ\text{C}$ unless otherwise noted

Maximum Rated Values

Symbol	Description	HYG15P120A1K2	Units
V_{CES}	Collector-Emitter Voltage $T_j=25^\circ\text{C}$	1200	V
V_{GES}	Gate-Emitter Voltage $T_j=25^\circ\text{C}$	± 20	V
I_c	Collector Current	20	A
	Collector Current $TC=80^\circ\text{C}$	15	
I_{CM}	Pulsed Collector Current $t_p=1\text{ms}$	30	A
P_{tot}	Total Power Dissipation $T_j=175^\circ\text{C}$	156	W

Characteristics Values

Symbol	Parameter		Min.	Typ.	Max.	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$T_j=25^{\circ}\text{C}$	1200			V
I_{CES}	Collector Cut- Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V}, T_j=25^{\circ}\text{C}$			0.1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V}, T_j=25^{\circ}\text{C}$	-400		400	nA
$V_{GE(th)}$	Gate to Emitter Threshold Voltage	$I_C=1.2\text{mA}, V_{GE}=V_{CE}, T_j=25^{\circ}\text{C}$	4.6	5.2	6.0	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=15\text{A}, V_{GE}=15\text{V}, T_j=25^{\circ}\text{C}$		2.1	2.5	V
		$I_C=15\text{A}, V_{GE}=15\text{V}, T_j=125^{\circ}\text{C}$		2.4		
R_{Gint}	Integrated Gate Resistor			0		Ω
Q_g	Gate Charge	$V_{CE}=600\text{V}, I_C=15\text{A}, V_{GE}=15\text{V}$		0.1		μC
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		1.38		nF
C_{res}	Reverse Transfer Capacitance			0.03		nF
$t_{d(on)}$	Turn - on Delay Time	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=30\Omega, V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	35		ns
			$T_{vj}=125^{\circ}\text{C}$	40		ns
t_r	Rise Time	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	40		ns
			$T_{vj}=125^{\circ}\text{C}$	45		ns
$t_{d(off)}$	Turn - off Delay Time	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=30\Omega, V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	240		ns
			$T_{vj}=125^{\circ}\text{C}$	270		ns
t_f	Fall Time	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	100		ns
			$T_{vj}=125^{\circ}\text{C}$	130		ns
E_{on}	Turn - on Energy	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=30\Omega, V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	0.7		mJ
			$T_{vj}=125^{\circ}\text{C}$	1.0		mJ
E_{off}	Turn - off Energy	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^{\circ}\text{C}$	1.0		mJ
			$T_{vj}=125^{\circ}\text{C}$	1.2		mJ
I_{sc}	Short Circuit Current	$t_{psc}\leq 10\mu\text{s}, V_{GE}=15\text{V}$ $T_{vj}=125^{\circ}\text{C}, V_{CC}=600\text{V}$		75		A
R_{thJC}	Junction-to-Case Thermal Resistance (Per IGBT)				0.8	K/W

DIODE-inverter $T_c=25^{\circ}\text{C}$ unless otherwise noted

Maximum Rated Values

Symbol	Description	HYG15P120A1K2	Units
V_{RRM}	Repetitive Peak Reverse Voltage $T_j=25^{\circ}\text{C}$	1200	V
I_F	DC Forward Current $T_c=80^{\circ}\text{C}$	15	A
I_{FRM}	Repetitive Peak Forward Current	30	A

Characteristics Values

Symbol	Parameter		Min.	Typ.	Max.	Units
V_F	Forward Voltage	IF=15A , VGE=0V, T _{vj} =25°C		2.2	2.6	V
		IF=15A , VGE=0V, T _{vj} =125°C		2.4		
t _{rr}	Reverse Recovery Time	IF=15A , VR=600V		150		ns
I _{RRM}	Max. Reverse Recovery Current	diF/dt=-400A/μs		23		A
E _{rec}	Reverse Recovery Charge	T _{vj} =125°C		0.8		mJ
R _{thJC}	Junction-to-Case Thermal Resistance (Per DIODE)				1.8	K /W

DIODE-rectifier T_c=25°C unless otherwise noted

Maximum Rated Values

Symbol	Description	HYG15P120A1K2	Units
V _{RRM}	Repetitive Peak Reverse Voltage T _j =25°C	1600	V
I _{F(AV)}	Average On-state Current per Diode T _c =80°C	15	A
I _{RMSM}	Maximum RMS Current at rectifier Output	tdb	A
I ² t	VR=0V, tp=10ms, T _j =45°C	200	A ² t
I _{FsM}	Surge Forward Current VR=0V, tp=10ms, T _j =45°C	165	A

Characteristics Values

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Units
V_F	Diode Forward Voltage	IF=15A	T _j =25°C			1.3	V
			T _j =125°C		1.0		
I _R	Reverse Current	VR=1600V	T _j =25°C			50	uA
			T _j =125°C			1	mA
R _{thJC}	Junction-to-Case Thermal Resistance (Per DIODE)				2.0	K /W	

IGBT-brake-chopper T_c=25°C unless otherwise noted

Maximum Rated Values

Symbol	Description	HYG15P120A1K2	Units
V _{CES}	Collector-Emitter Voltage T _j =25°C	1200	V
V _{GES}	Gate-Emitter Voltage T _j =25°C	±20	V
I _c	Collector Current	20	A
	Collector Current TC=80°C	15	
I _{CM}	Pulsed Collector Current tp=1ms	30	A
P _{tot}	Tatal Power Dissipation T _j =175°C	156	W

Characteristics Values

Symbol	Parameter		Min.	Typ.	Max.	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$T_j=25^\circ\text{C}$	1200			V
I_{CES}	Collector Cut- Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V}, T_j=25^\circ\text{C}$			5	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V}, T_j=25^\circ\text{C}$	-500		500	nA
$V_{GE(th)}$	Gate to Emitter Threshold Voltage	$I_C=1.2\text{mA}, V_{GE}=V_{CE}, T_j=25^\circ\text{C}$	5	5.8	7.5	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=15\text{A}, V_{GE}=15\text{V}, T_j=25^\circ\text{C}$		1.9	2.3	V
		$I_C=15\text{A}, V_{GE}=15\text{V}, T_j=125^\circ\text{C}$		2.3		
R_{Gint}	Integrated Gate Resistor			0		Ω
Q_g	Gate Charge	$V_{CE}=600\text{V}, I_C=15\text{A}, V_{GE}=15\text{V}$		0.09		μC
C_{ies}	Input Capacitance	$V_{CE}=30\text{V}, V_{GE}=0\text{V}, f=0.1\text{MHz}$		1.39		nF
C_{res}	Reverse Transfer Capacitance			0.06		nF
$t_{d(on)}$	Turn - on Delay Time	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=56\ \Omega,$	$T_{vj}=25^\circ\text{C}$	60		ns
			$T_{vj}=125^\circ\text{C}$	70		ns
t_r	Rise Time	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^\circ\text{C}$	30		ns
			$T_{vj}=125^\circ\text{C}$	40		ns
$t_{d(off)}$	Turn - off Delay Time	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=56\ \Omega,$	$T_{vj}=25^\circ\text{C}$	220		ns
			$T_{vj}=125^\circ\text{C}$	250		ns
t_f	Fall Time	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^\circ\text{C}$	80		ns
			$T_{vj}=125^\circ\text{C}$	100		ns
E_{on}	Turn - on Energy	$V_{CC}=600\text{V}, I_C=15\text{A}, R_G=56\ \Omega,$	$T_{vj}=25^\circ\text{C}$	1.2		mJ
			$T_{vj}=125^\circ\text{C}$	1.55		mJ
E_{off}	Turn - off Energy	$V_{GE}=\pm 15\text{V},$ Inductive Load	$T_{vj}=25^\circ\text{C}$	1.4		mJ
			$T_{vj}=125^\circ\text{C}$	1.7		mJ
I_{sc}	Short Circuit Current	$t_{psc}\leq 10\ \mu\text{s}, V_{GE}=15\text{V}$ $T_{vj}=125^\circ\text{C}, V_{CC}=900\text{V}$		60		A
R_{thJC}	Junction-to-Case Thermal Resistance (Per IGBT)				1.8	K/W

DIODE-brake-chopper $T_c=25^\circ\text{C}$ unless otherwise noted

Maximum Rated Values

Symbol	Description	HYG15P120A1K2	Units
V_{RRM}	Repetitive Peak Reverse Voltage $T_j=25^\circ\text{C}$	1200	V
I_F	DC Forward Current $T_c=80^\circ\text{C}$	10	A
I_{FRM}	Repetitive Peak Forward Current	15	A

Characteristics Values

Symbol	Parameter		Min.	Typ.	Max.	Units
V_F	Forward Voltage	IF=5A , VGE=0V, $T_{vj} = 25^{\circ}\text{C}$ IF=5A , VGE=0V, $T_{vj} = 125^{\circ}\text{C}$		2.0 1.95	2.2	V
t_{rr}	Reverse Recovery Time	IF=5A , VR=600V		350		ns
I_{RRM}	Max. Reverse Recovery Current	diF/dt=-200A/ μs		6		A
E_{rec}	Reverse Recovery Charge	$T_{vj} = 125^{\circ}\text{C}$		0.15		mJ
R_{thJC}	Junction-to-Case Thermal Resistance (Per DIODE)				2.5	K /W

Electrical Characteristics of NTC $T_c=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
R25	Rated Resistance	$T_c=25^{\circ}\text{C}$		5.0		k Ω
$\Delta R/R$	Deviation of R100	$T_c=100^{\circ}\text{C}$, R100=493 Ω	-5		5	
P25	Power Dissipation	$T_c=25^{\circ}\text{C}$			20	mW
B25/50	B value			3375		K

Module Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Units
V_{iso}	Isolation Voltage RMS, f=50Hz, t=1min		2500		V
T_{vjmax}	Maximum Junction Temperature			150	$^{\circ}\text{C}$
T_{vjop}	Operating Temperature	-40		125	$^{\circ}\text{C}$
Md	Mounting Screw:M4	3		5	N·m
T_{strc}	Storage Temperature range	-40		125	$^{\circ}\text{C}$
Weight				23.5	g

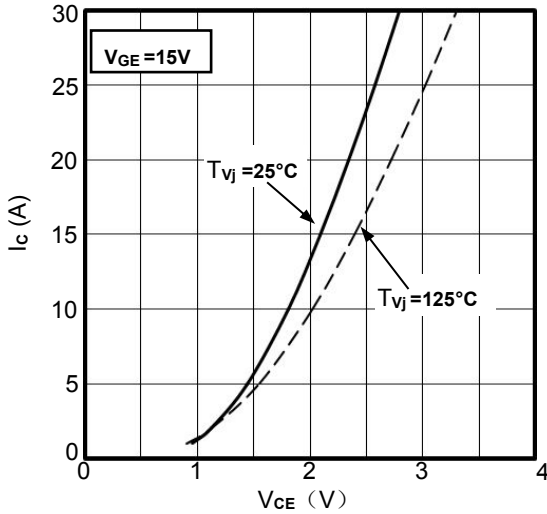


Figure1. Typical Output Characteristics

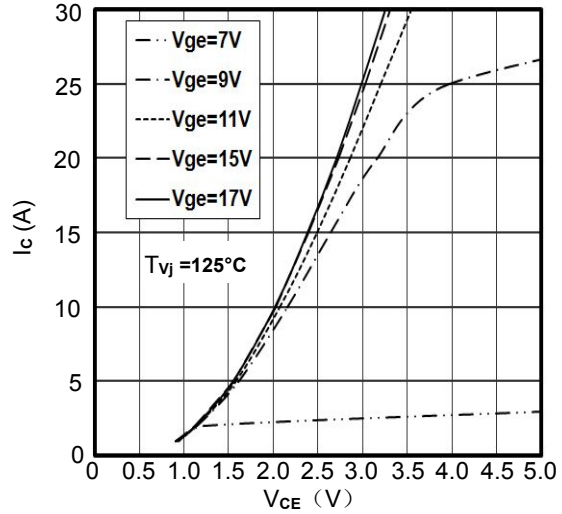


Figure2. Typical Output Characteristics

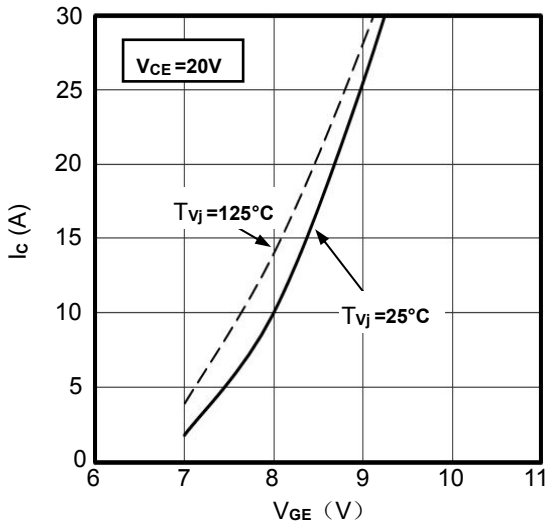


Figure3. Typical Transfer characteristics

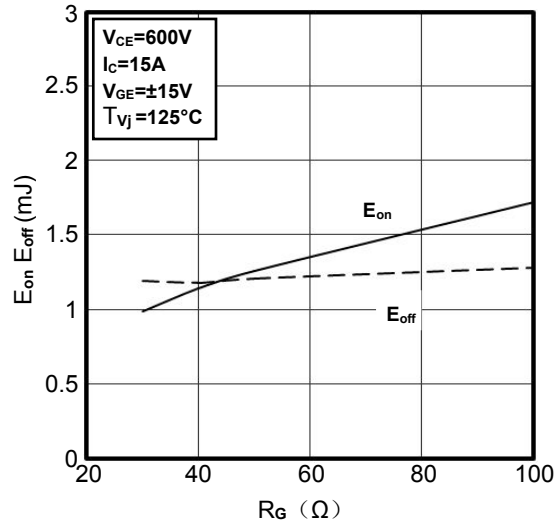


Figure4. Switching Energy vs. Gate Resistor

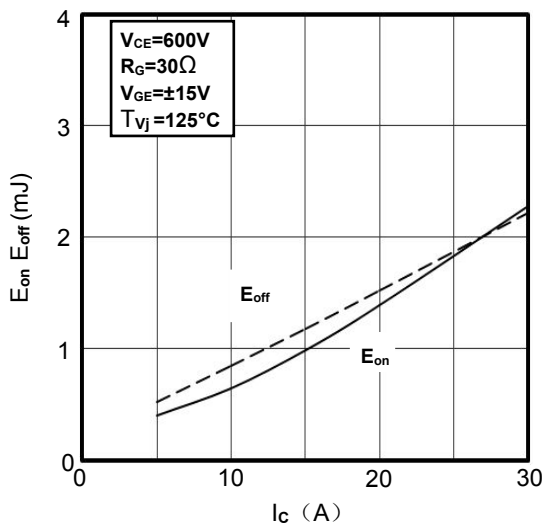


Figure5. Switching Energy vs. Collector Current

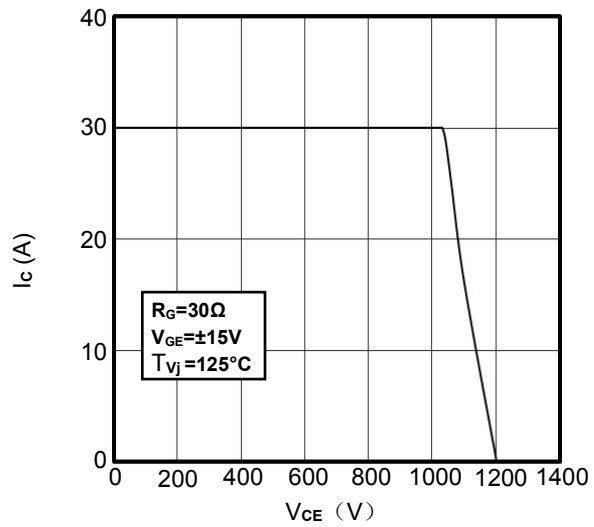


Figure6. Reverse Biased Safe Operating Area

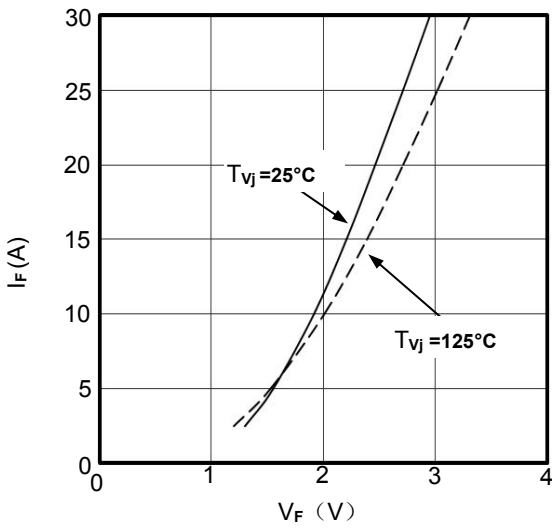


Figure 7. Diode Forward Characteristics

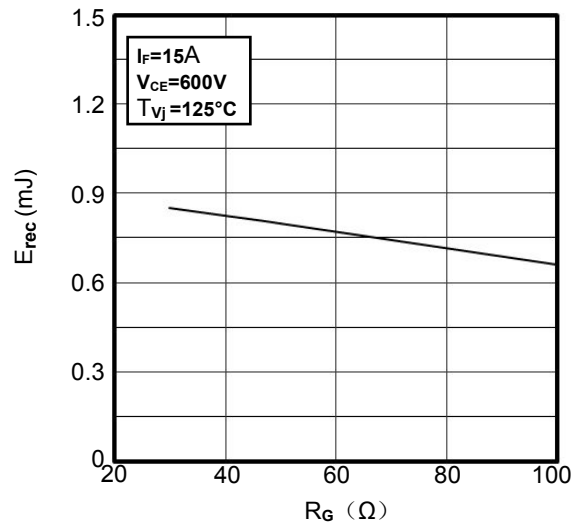


Figure 8. Switching Energy vs. Gate Resistor

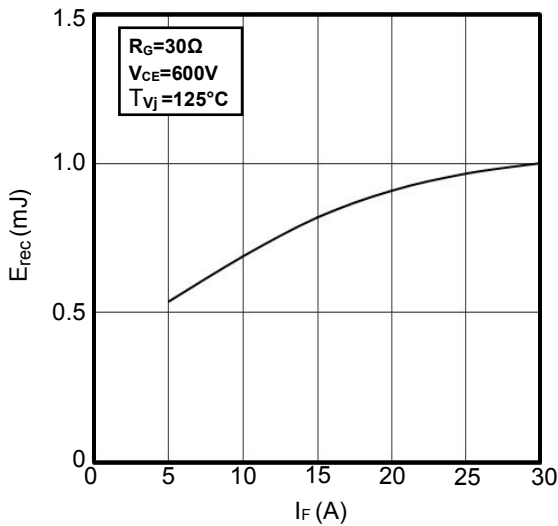


Figure 9. Switching Energy vs. Forward Current

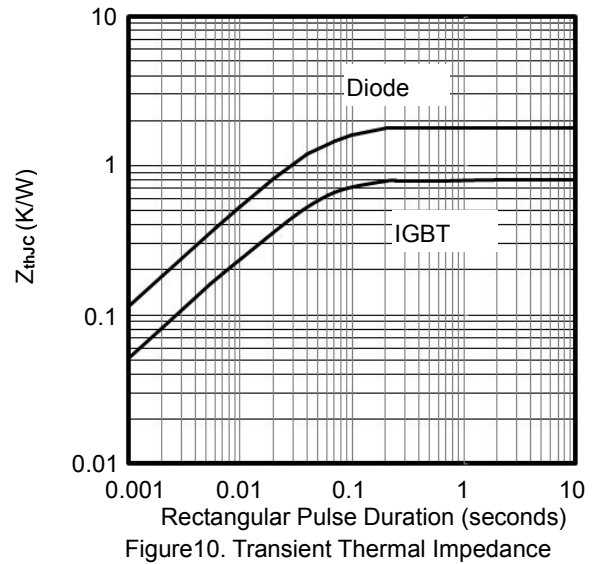


Figure 10. Transient Thermal Impedance

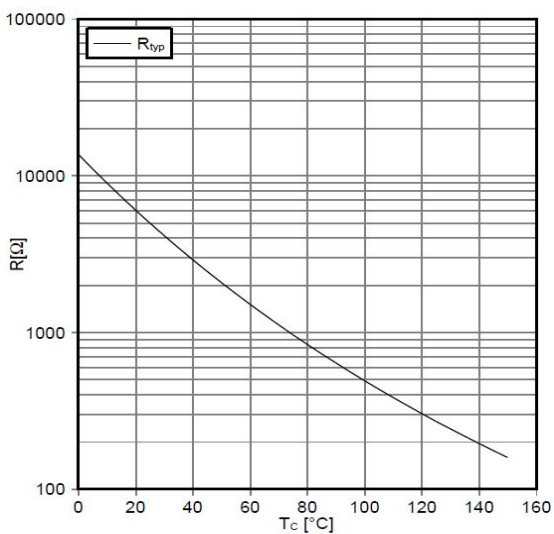


Figure 11. NTC-Thermistor-temperature characteristic

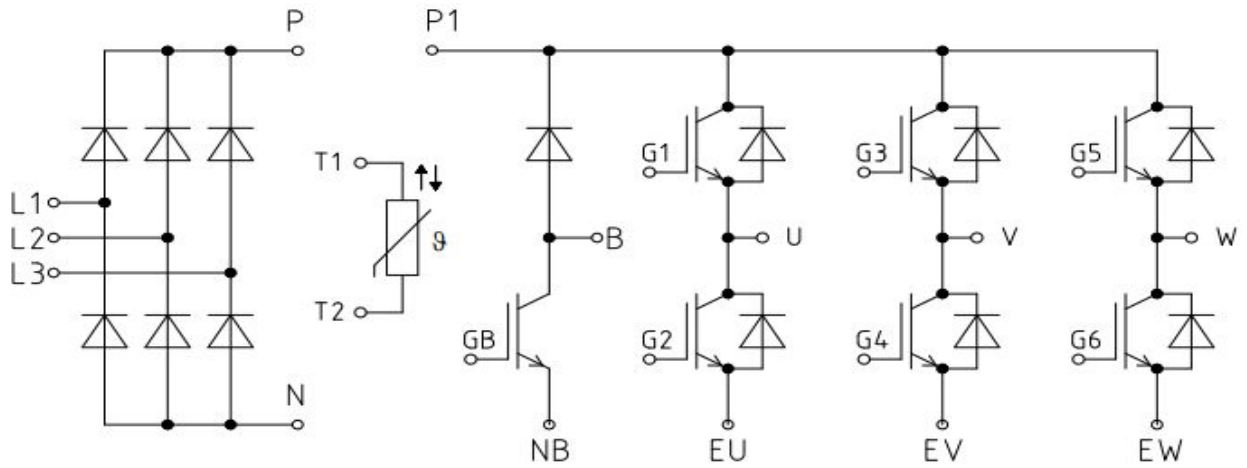


Figure11. Circuit Diagram

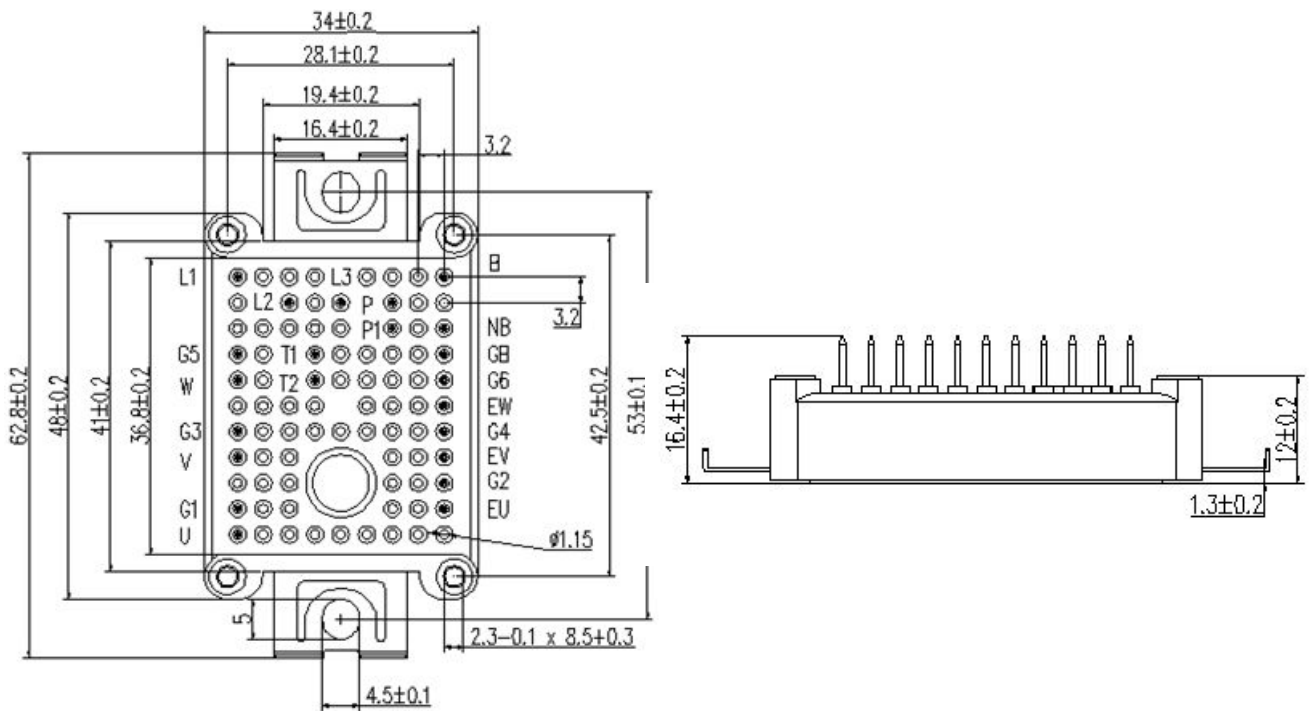


Figure12. Package Dimensions (mm)