

<b>HIGH EFFICIENCY (ULTRA FAST) RECTIFIERS</b>	<b>REVERSE VOLTAGE - 50 to 1000 Volts</b> <b>FORWARD CURRENT - 2.0 Amperes</b>
<b>FEATURES</b> <ul style="list-style-type: none"> <li>● Low cost</li> <li>● Diffused junction</li> <li>● Ultra fast switching for high efficiency</li> <li>● Low reverse leakage current</li> <li>● Low forward voltage drop</li> <li>● High current capability</li> <li>● The plastic material carries UL recognition 94V-0</li> </ul> <b>MECHANICAL DATA</b> <ul style="list-style-type: none"> <li>● Case: JEDEC DO-15 molded plastic</li> <li>● Polarity: Color band denotes cathode</li> <li>● Weight: 0.015 ounces , 0.4 grams</li> <li>● Mounting position: Any</li> </ul>	<p style="text-align: center;">Dimensions in inches and (millimeters)</p>

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave ,60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HER201	HER202	HER203	HER204	HER205	HER206	HER207	HER208	UNIT
		UF2001	UF2002	UF2003	UF2004	UF2005	UF2006	UF2007	UF2008	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current @T <sub>A</sub> =50 °C	I <sub>(AV)</sub>	2.0								A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I <sub>FSM</sub>	60								A
Peak Forward Voltage at 2.0A DC	V <sub>F</sub>	1.0		1.3		1.7			V	
Maximum DC Reverse Current @T <sub>J</sub> =25°C at Rated DC Blocking Voltage @T <sub>J</sub> =100°C	I <sub>R</sub>	5.0				100				µA
Maximum Reverse Recovery Time(Note 1)	T <sub>RR</sub>	50					75			nS
Typical Junction Capacitance (Note2)	C <sub>J</sub>	50					30			pF
Typical Thermal Resistance (Note3)	R <sub>θJA</sub>	25								°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +150								°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150								°C

NOTES: 1.Measured with I<sub>F</sub>=0.5A, I<sub>R</sub>=1A , I<sub>RR</sub>=0.25A  
 2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC  
 3.Thermal resistance junction to ambient

FIG. 1 – FORWARD CURRENT DERATING CURVE

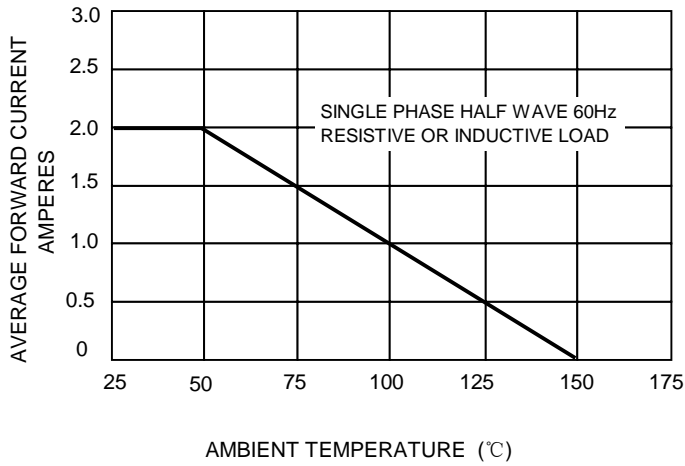


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

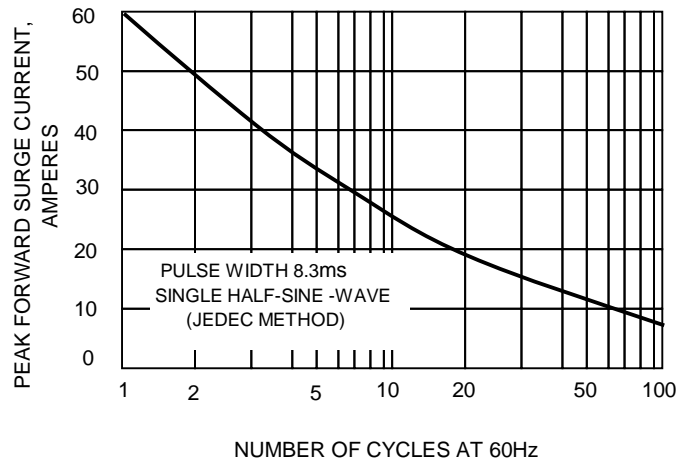


FIG.3 – TYPICAL JUNCTION CAPACITANCE

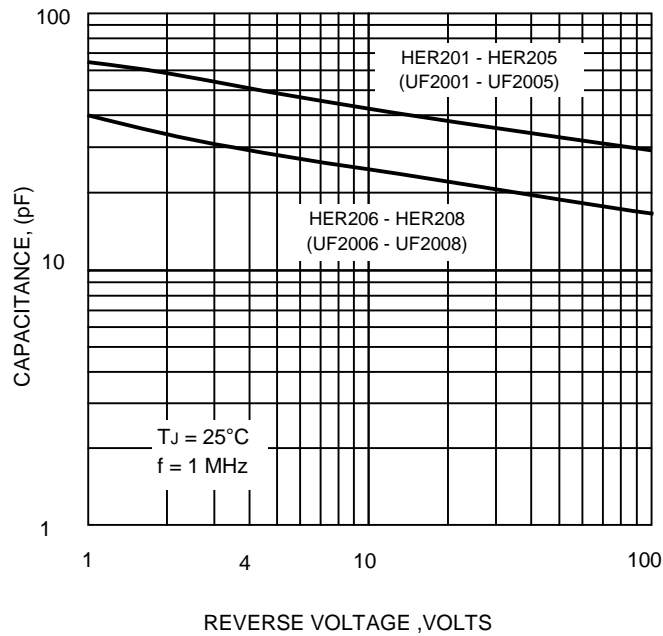


FIG.4-TYPICAL FORWARD CHARACTERISTICS

