


PNP Transistors

2SB1027-HF

■ Features

- Low frequency power amplifier
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

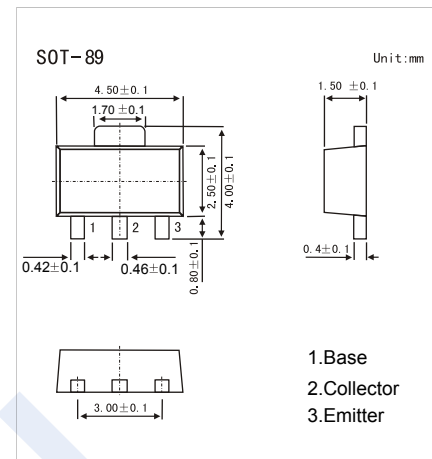

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CB0}	-180	V
Collector - Emitter Voltage	V _{CEO}	-120	
Emitter - Base Voltage	V _{EBO}	-5	
Collector Current - Continuous	I _C	-1.5	A
Collector current -Pulse (Note.1)	I _{CP}	-3	
Collector Power Dissipation	P _C	1	W
Junction Temperature	T _J	150	°C
Storage Temperature range	T _{stg}	-55 to 150	

Note.1: PW ≤ 10ms, Duty cycle ≤ 20%

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CB0}	I _C = -1mA, I _E = 0	-180			V
Collector- emitter breakdown voltage	V _{CEO}	I _C = -10mA, R _{BE} = ∞	-120			
Emitter - base breakdown voltage	V _{EBO}	I _E = -1mA, I _C = 0	-5			
Collector-base cut-off current	I _{CBO}	V _{CB} = -160V, I _E = 0			-10	uA
Emitter cut-off current	I _{EBO}	V _{EB} = -5V, I _C = 0			-0.1	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = -500mA, I _B = -50mA			-1	V
Base - emitter saturation voltage	V _{BE(sat)}	I _C = -500mA, I _B = -50mA			-1.2	
Base - emitter voltage	V _{BE}	V _{CE} = -5V, I _C = -150 mA			-0.9	
DC current gain	h _{FE}	V _{CE} = -5V, I _C = -150 mA	60		320	
		V _{CE} = -5V, I _C = -500 mA	30			







■ Classification of h_{FE}(1)

Type	2SB1027-H-HF	2SB1027-J-HF	2SB1027-K-HF
Range	60-120	100-200	160-320
Marking	EH _F	EJ _F	EK _F

PNP Transistors

2SB1027-HF

■ Typical Characteristics

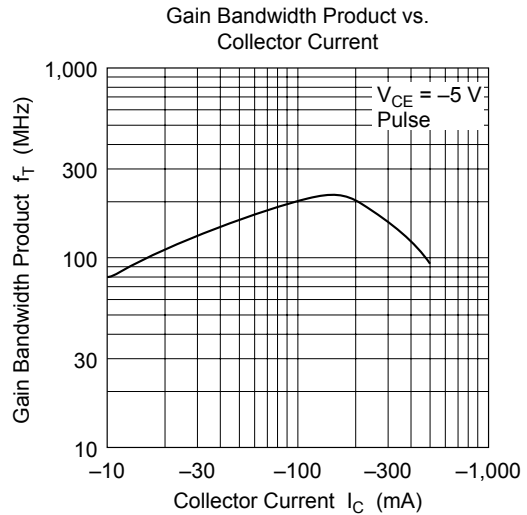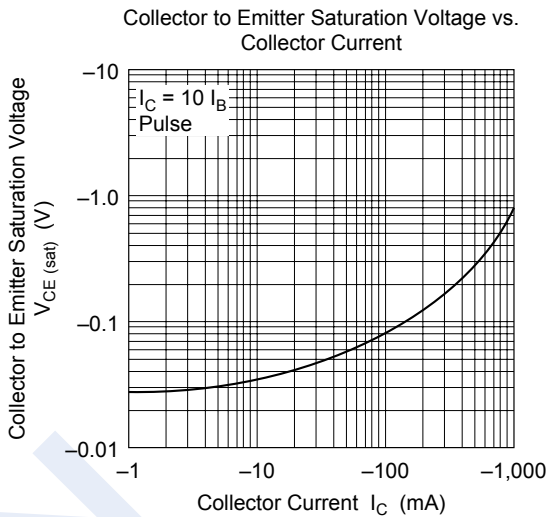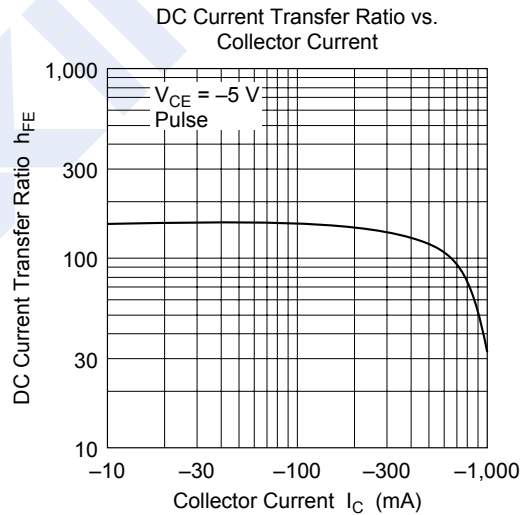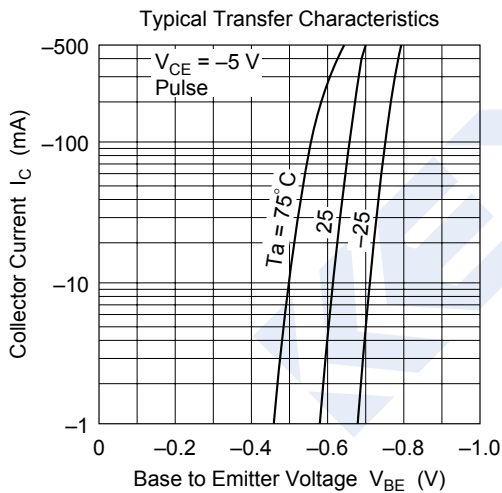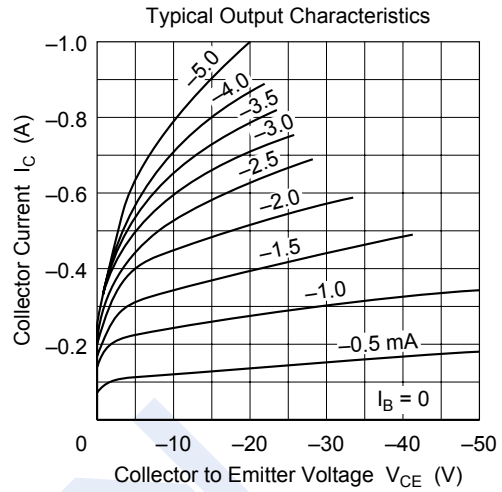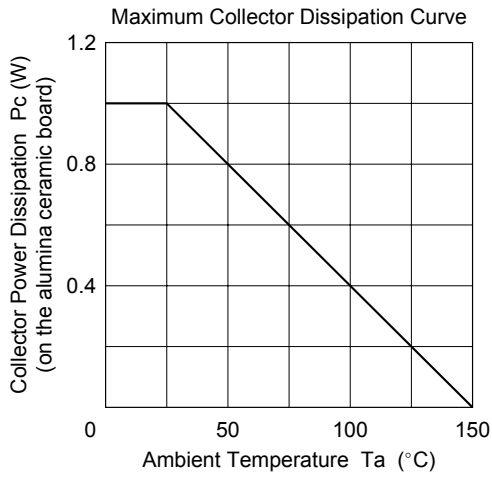

PNP Transistors

2SB1027-HF

■ Typical Characteristics

