


NPN Transistors

2SD1619-HF

■ Features

- Very small size making it easy to provide highdensity, small-sized hybrid IC's.
- Complementary to 2SB1119-HF
- Pb-Free Package May be Available. The G-Suffix Denotes a Pb-Free Lead Finish

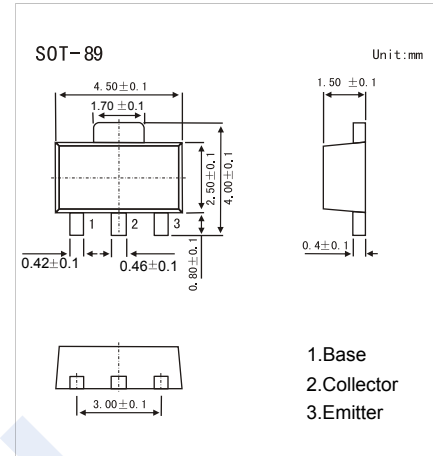

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V _{CB0}	25	V
Collector - Emitter Voltage	V _{CEO}	25	
Emitter - Base Voltage	V _{EB0}	5	
Collector Current - Continuous	I _C	1	A
Collector Current - Pulse	I _{CP}	2	
Collector Power Dissipation (Note.1)	P _C	0.5 1.3	W
Junction Temperature	T _J	150	
Storage Temperature Range	T _{stg}	-55 to 150	

Note.1: Mounted on ceramic board (250mm² × 0.8mm)

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V _{CB0}	I _C = 100 uA, I _E = 0	25			V
Collector- emitter breakdown voltage	V _{CEO}	I _C = 1 mA, R _{BE} = ∞	25			
Emitter - base breakdown voltage	V _{EB0}	I _E = 100 uA, I _C = 0	5			
Collector-base cut-off current	I _{CB0}	V _{CB} = 20 V, I _E = 0			0.1	uA
Emitter cut-off current	I _{EB0}	V _{EB} = 4V, I _C =0			0.1	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =500 mA, I _B =50 mA		0.1	0.3	V
Base - emitter saturation voltage	V _{BE(sat)}	I _C =500 mA, I _B =50 mA		0.85	1.2	
DC current gain	h _{FE}	V _{CE} = 2V, I _C = 50 mA	100		560	
		V _{CE} = 2V, I _C = 1 A	40			
Collector output capacitance	C _{ob}	V _{CB} = 10V, I _E = 0, f=1MHz		15		pF
Transition frequency	f _T	V _{CE} = 10V, I _C = 50mA		180		MHz







■ Classification of h_{FE}(1)

Type	2SD1619-R-HF	2SD1619-S-HF	2SD1619-T-HF	2SD1619-U-HF
Range	100-200	140-280	200-400	280-560
Marking	DB R* _F	DB S* _F	DB T* _F	DB U* _F

NPN Transistors

2SD1619-HF

■ Typical Characteristics

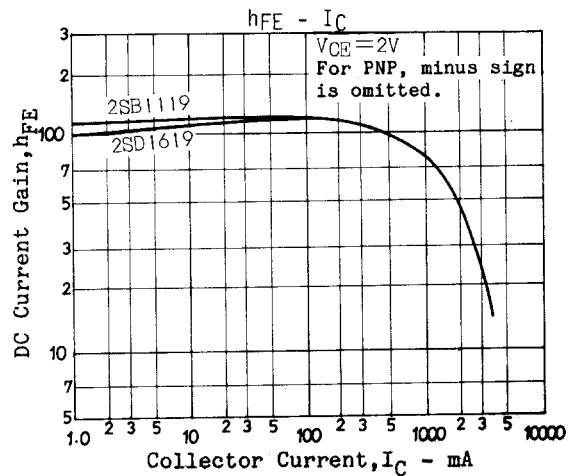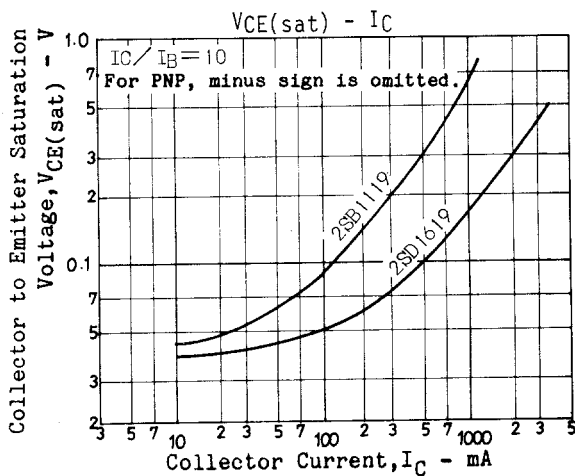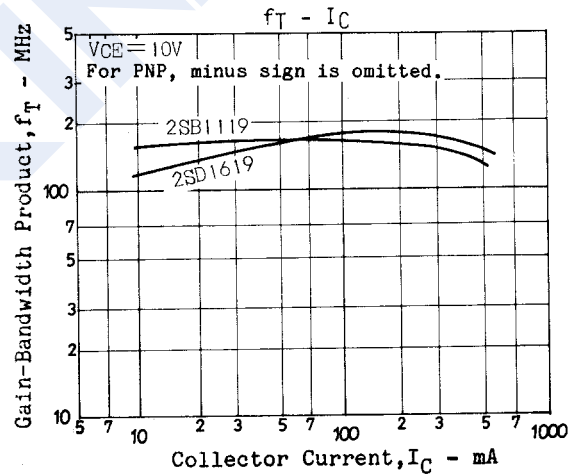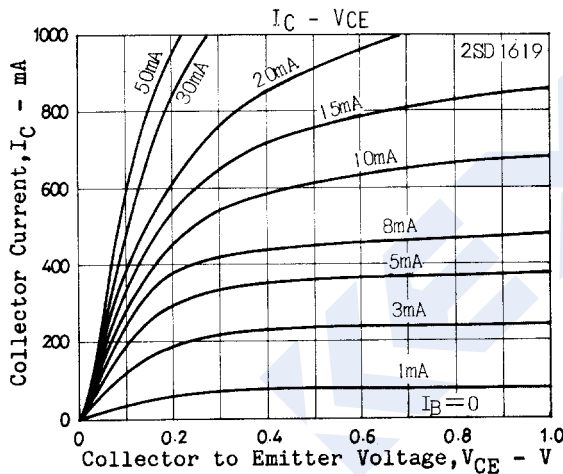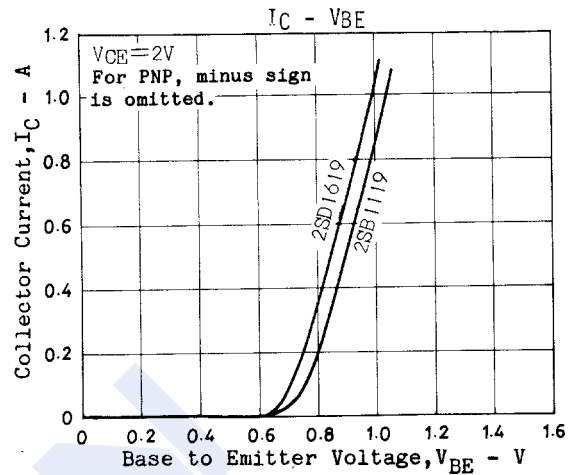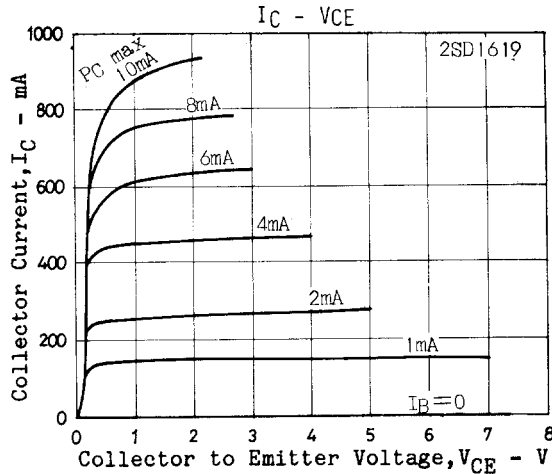

NPN Transistors

2SD1619-HF

■ Typical Characteristics

