


Schottky Powermod CPT20230

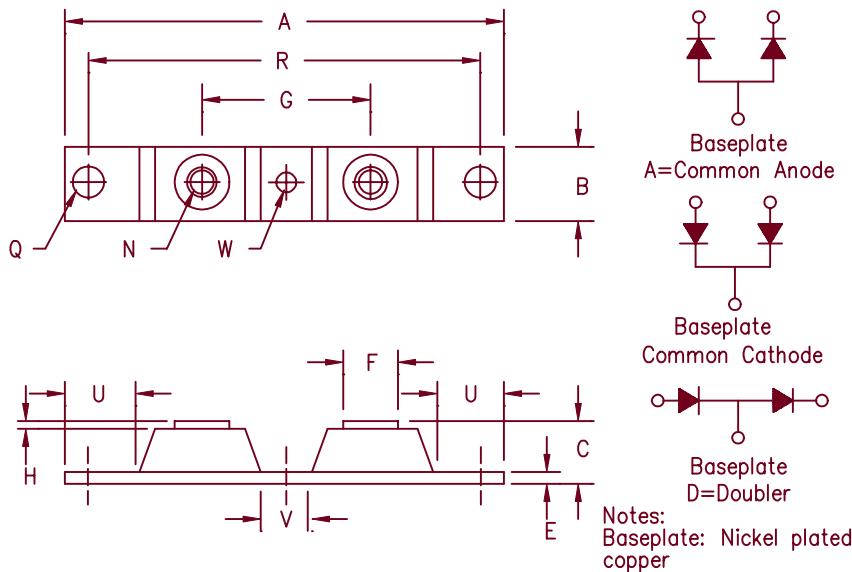

Dim.		Inches	Millimeters			
		Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20		
B	0.700	0.800	17.78	20.32		
C	---	0.630	---	16.00		
E	0.120	0.130	3.05	3.30		
F	0.490	0.510	12.45	12.95		
G	1.375	BSC	34.92	BSC		
H	0.010	---	0.25	---		
N	---	---	---	---		1/4-20
Q	0.275	0.290	6.99	7.37		Dia.
R	3.150	BSC	80.01	BSC		
U	0.600	---	15.24	---		
V	0.312	0.340	7.92	8.64		
W	0.180	0.195	4.57	4.95		Dia.

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT20230	220CNQ030	30V		30V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Power Loss
- 150°C Junction Temperature
- 220 Amperes/30 Volts
- Reverse Energy Tested

Electrical Characteristics

Average forward current per package	$I_F(AV)$ 220 Amps	$T_C = 117^\circ\text{C}$, square wave, $R_{\theta JC} = 0.2^\circ\text{C}/\text{W}$
Average forward current per leg	$I_F(AV)$ 110 Amps	$T_C = 117^\circ\text{C}$, square wave, $R_{\theta JC} = 0.4^\circ\text{C}/\text{W}$
Maximum surge current per leg	I_{FSM} 2500 Amps	8.3ms, half sine, $T_J = 150^\circ\text{C}$
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec square wave}, T_J = 25^\circ\text{C}$
Max peak forward voltage per leg	V_{FM} .48 Volts	$I_{FM} = 110A: T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	I_{RM} 1.0 Amps	$V_{RRM}, T_J = 125^\circ\text{C}$
Max peak reverse current per leg	I_{RM} 10 mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance per leg	C_J 4900 pF	$V_R = 5V, T_J = 25^\circ\text{C}, f = 1\text{MHz}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operation junction temp range	T_J	-55°C to 150°C
Max thermal resistance per leg	$R_{\theta JC}$	0.4°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.2°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole) center bolt must be torqued first		8–10 inch pounds
Weight		2.8 ounces (75 grams) typical

CPT20230

Figure 1
Typical Forward Characteristics – Per Leg

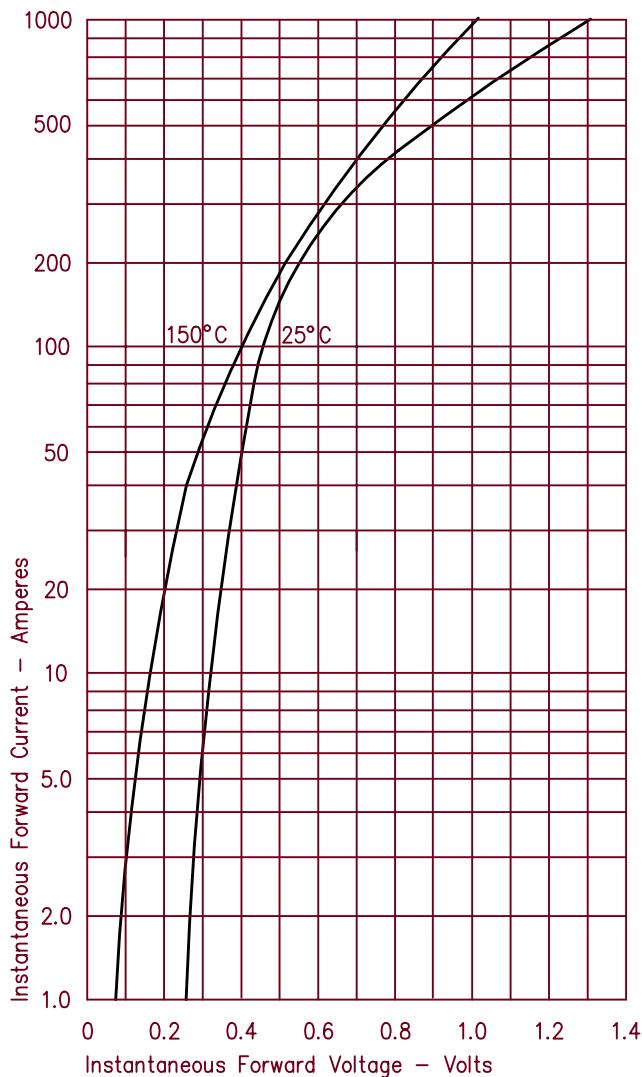


Figure 2
Typical Reverse Characteristics – Per Leg

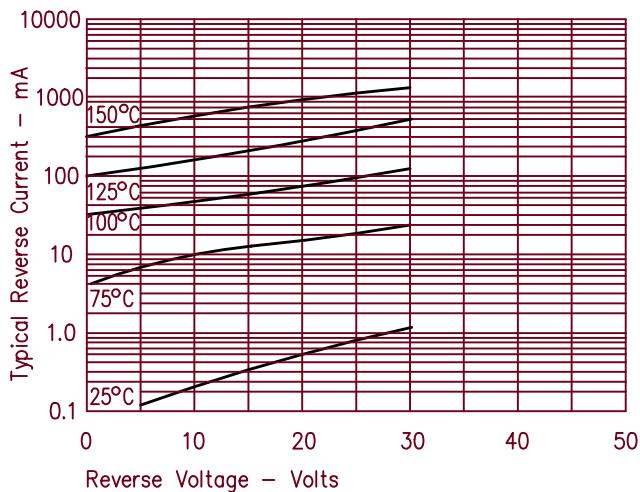


Figure 3
Typical Junction Capacitance – Per Leg

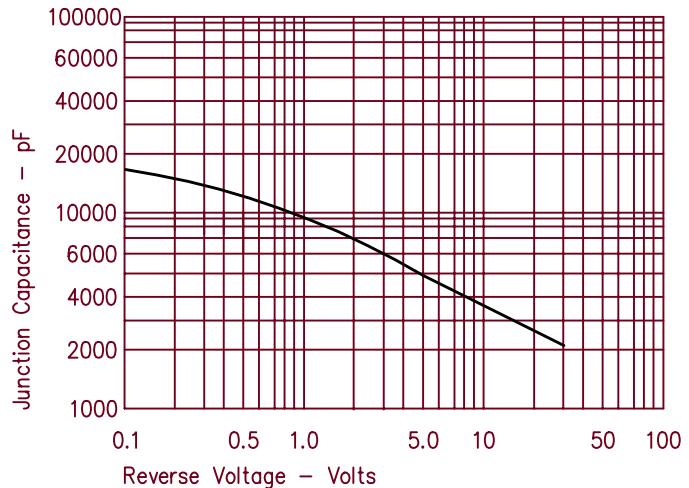


Figure 4
Forward Current Derating – Per Leg

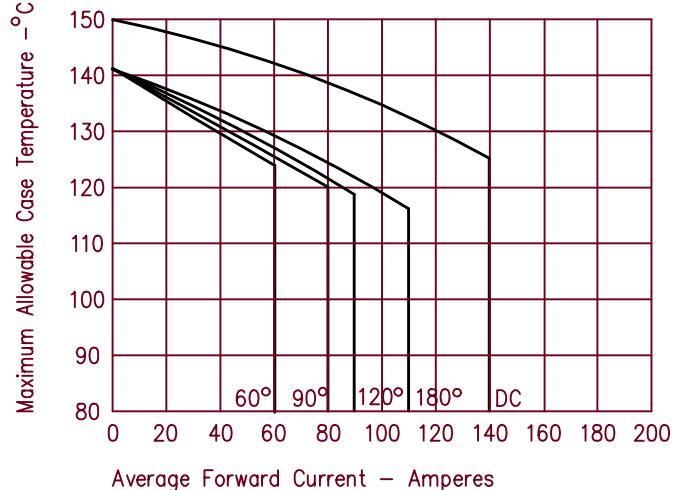


Figure 5
Maximum Forward Power Dissipation – Per Leg

