


# Schottky PowerMod

## CPT12035 — CPT12050

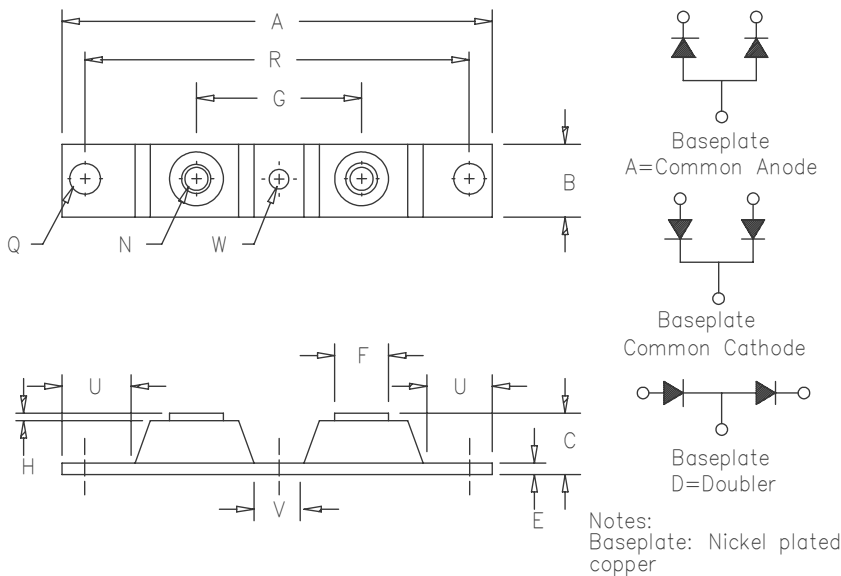

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375	BSC	34.92	BSC	
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150	BSC	80.01	BSC	
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT12035*	MBR12035CT	35V	35V
CPT12040*	MBR12040CT	40V	40V
CPT12045*	MBR12045CT	45V	45V
CPT12050*		50V	50V

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 120 Amperes/35 to 50 Volts
- 175°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

### Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 120 Amps	T <sub>C</sub> = 140°C, Square wave, R <sub>θJC</sub> = 0.43°C/W
Average forward current per leg	I <sub>F(AV)</sub> 60 Amps	T <sub>C</sub> = 140°C, Square wave, R <sub>θJC</sub> = 0.85°C/W
Maximum surge current per leg	I <sub>FSM</sub> 1000 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Maximum repetitive reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHZ, 25° C, 1µsec square wave
Max peak forward voltage per leg	V <sub>FM</sub> .63 Volts	I <sub>FM</sub> = 120A: T <sub>J</sub> = 175°C
Max peak forward voltage per leg	V <sub>FM</sub> .80 Volts	I <sub>FM</sub> = 120A: T <sub>J</sub> = 25°C*
Max peak reverse current per leg	I <sub>RM</sub> 40 mA	V <sub>RRM</sub> , T <sub>J</sub> = 125°C*
Max peak reverse current per leg	I <sub>RM</sub> 3 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance per leg	C <sub>J</sub> 2700 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300µsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55° C to 175° C
Operation junction temp range	T <sub>J</sub>	-55° C to 175° C
Max thermal resistance per leg	R <sub>θJC</sub>	0.85° C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.43° C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.08° C/W Case to sink
Terminal Torque		35-50 inch pounds
Mounting Base Torque (outside holes)		30-40 inch pounds
Mounting Base Torque (center hole)		8-10 inch pounds
Weight		2.8 ounces (75 grams) typical

# CPT12035 — CPT12050

Figure 1  
Typical Forward Characteristics — Per Leg

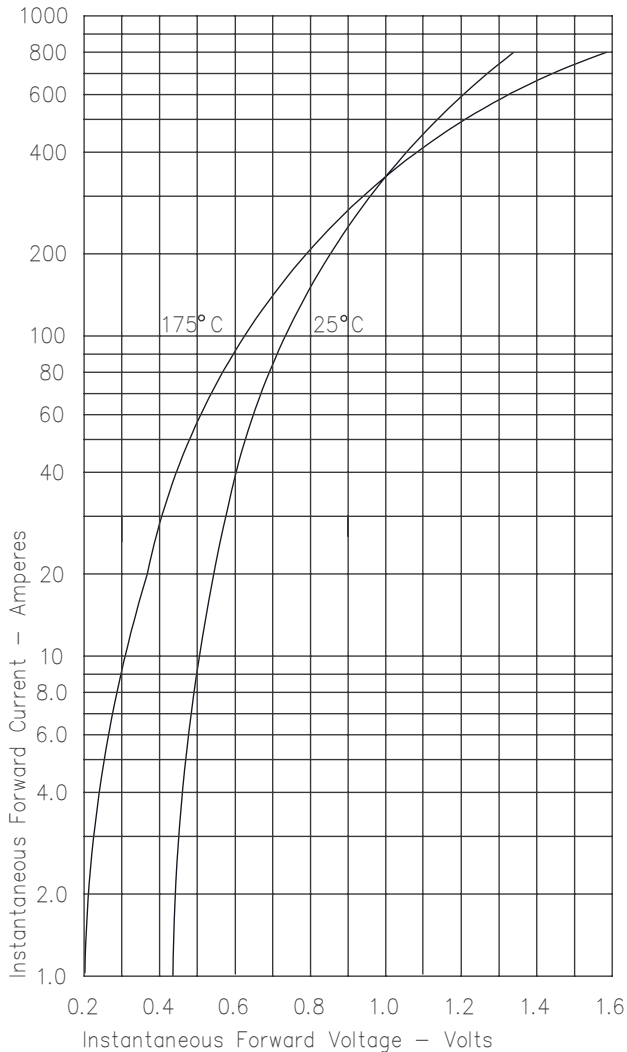


Figure 3  
Typical Junction Capacitance — Per Leg

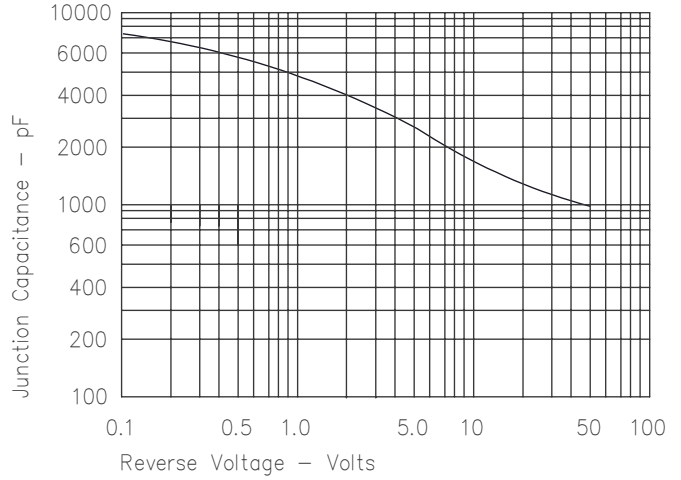


Figure 4  
Forward Current Derating — Per Leg

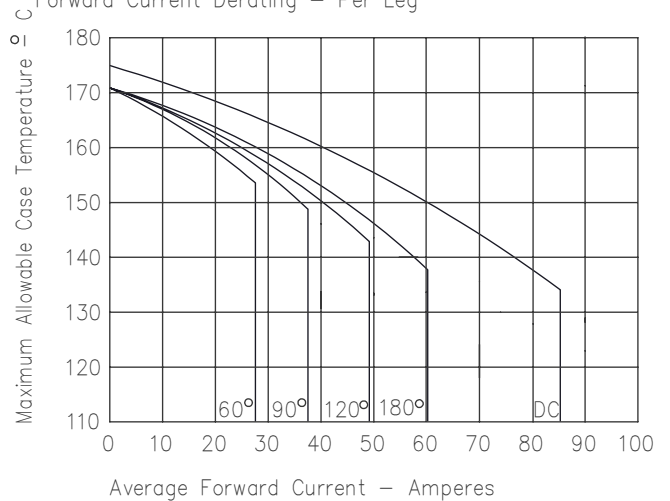


Figure 2  
Typical Reverse Characteristics — Per Leg


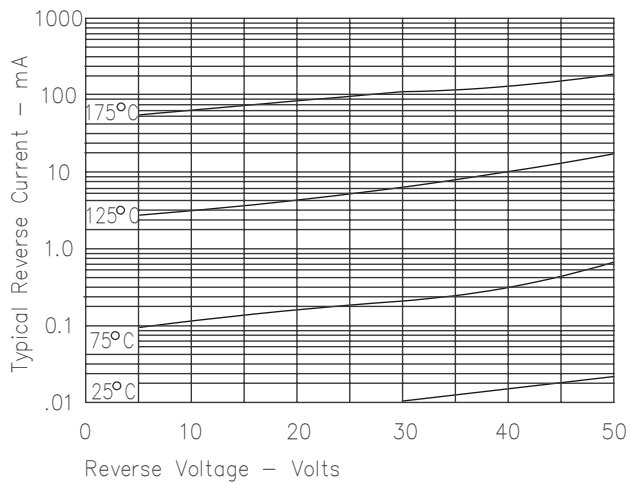


Figure 5  
Maximum Forward Power Dissipation — Per Leg

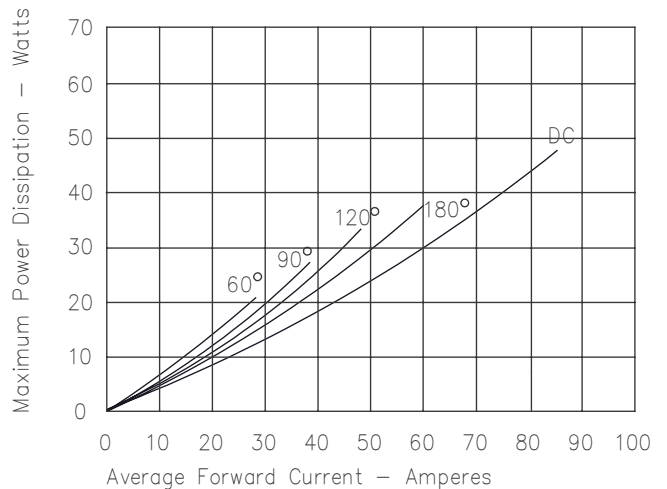

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**This datasheet has been downloaded from:**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**

**Free Download**

**Daily Updated Database**

**100% Free Datasheet Search Site**

**100% Free IC Replacement Search Site**

**Convenient Electronic Dictionary**

**Fast Search System**

**[www.EEworld.com.cn](http://www.EEworld.com.cn)**