


# Schottky Powermod FST16230

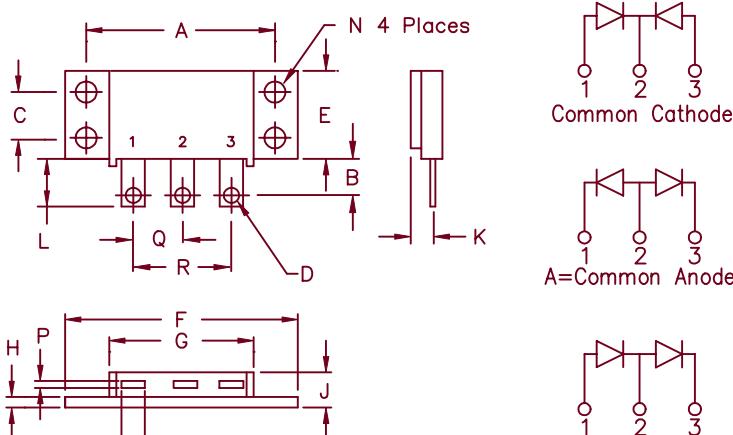

Notes:  
 Baseplate: Nickel plated copper;  
 electrically isolated  
 Pins: Nickel plated copper

Dim.		Inches	Millimeters				
			Min.	Max.	Min.	Max.	Notes
A	1.995	2.005	50.67	50.93			
B	0.300	0.325	7.62	8.26			
C	0.495	0.505	12.57	12.83			
D	0.182	0.192	4.62	4.88			
E	0.990	1.010	25.15	25.65			
F	2.390	2.410	60.71	61.21			
G	1.500	1.525	38.10	38.70			
H	0.120	0.130	3.05	3.30			
J	---	0.400	---	10.16			
K	0.240	0.260	6.10	6.60 to Lead CL			
L	0.490	0.510	12.45	12.95			
M	0.330	0.350	8.38	6.90			
N	0.175	0.195	4.45	4.95			
P	0.035	0.045	0.89	1.14			
Q	0.445	0.455	11.30	11.56			
R	0.890	0.910	22.61	23.11			

TO-249

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage
FST16230*	162CMQ030	30V	30V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- $V_{RRM}$  – 30 Volts
- High Surge Capacity
- Reverse Energy Tested

## Electrical Characteristics

Average forward current per pkg	F(AV) 160 Amps	$T_C = 83^\circ\text{C}$ , Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$
Average forward current per leg	F(AV) 80 Amps	$T_C = 83^\circ\text{C}$ , Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
Maximum surge current per leg	FSM 1000 Amps	8.3 ms, half sine $T_J = 150^\circ\text{C}$
Max repetitive peak reverse current per leg	R(OV) 2 Amps	$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec}$ Square wave
Max peak forward voltage per leg	$V_{FM}$ .55 Volts	FM = 80A: $T_J = 125^\circ\text{C}^*$
Max peak forward voltage per leg	$V_{FM}$ .59 Volts	FM = 80A: $T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	RM 300 mA	$V_{RRM}, T_J = 125^\circ\text{C}^*$
Max peak reverse current per leg	RM 1 mA	$V_{RRM}, T_J = 25^\circ\text{C}$
Typical junction capacitance per leg	$C_J$ 2400 pF	$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 150°C
Maximum thermal resistance per leg	$R_{\theta JC}$	1.0°C/W Junction to case
Maximum thermal resistance per pkg.	$R_{\theta JC}$	0.5°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.1°C/W Case to sink
Mounting torque		15 – 20 inch pounds
Weight		2.5 ounces (71 grams) typical

# FST16230

Figure 1  
Typical Forward Characteristics – Per Leg

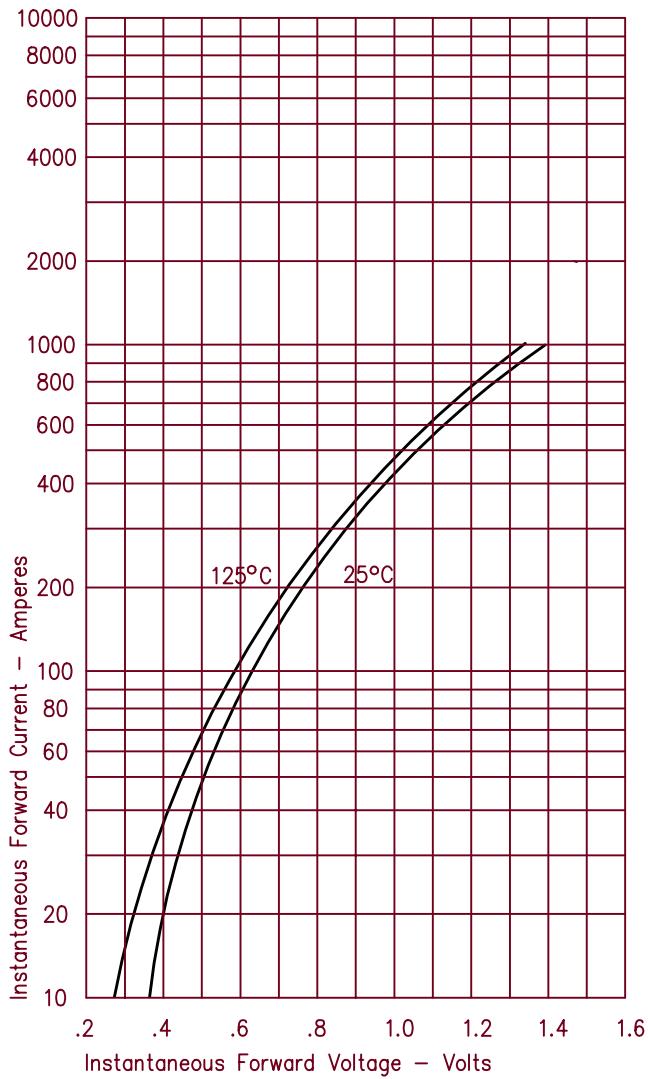


Figure 3  
Typical Junction Capacitance – Per Leg

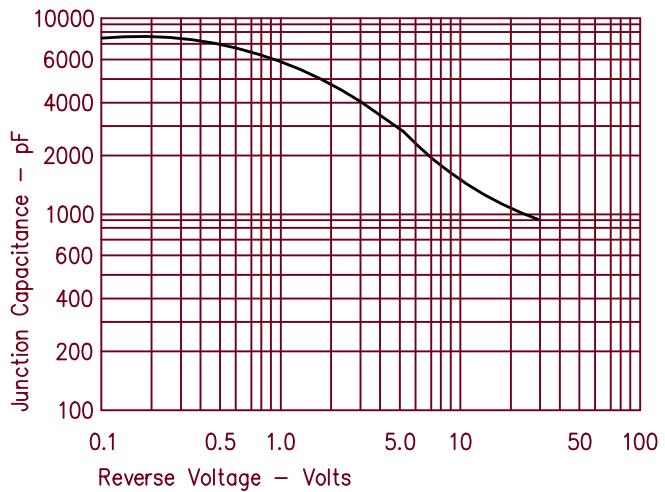


Figure 4  
Forward Current Derating – Per Leg

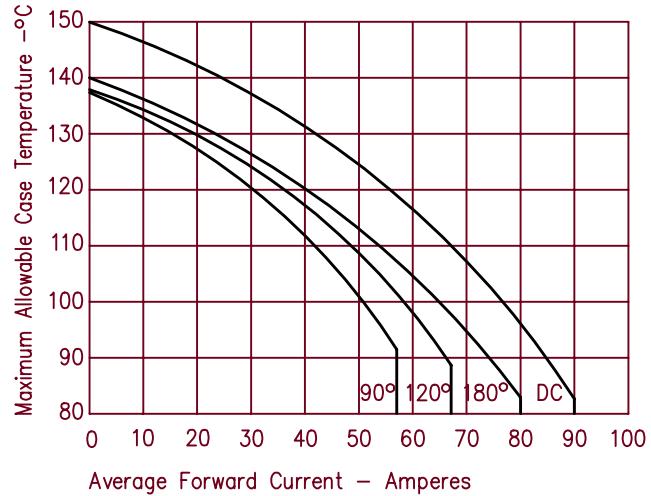


Figure 2  
Typical Reverse Characteristics – Per Leg

