

VOLTAGE RANGE: 100 --- 1000 V

CURRENT: 5.0 A




Features

- ✧ Low cost
- ✧ Diffused junction
- ✧ Low leakage
- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ Easily cleaned with Freon, Isopropanol and similar solvents

Mechanical Data

- ✧ Case: JEDEC DO-27, molded plastic
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.041 ounces, 1.15 grams
- ✧ Mounting position: Any

DO-27

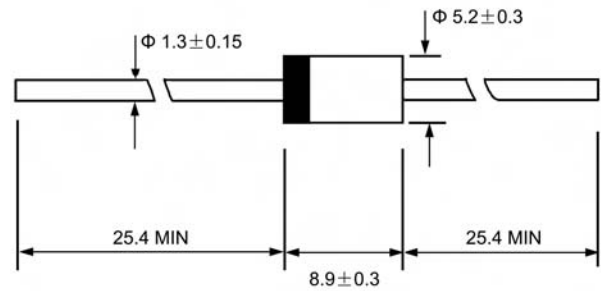

Dimensions in millimeters

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 50 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		5A1	5A2	5A4	5A6	5A8	5A10	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	5.0						A
Peak forward surge current 10ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	300						A
Maximum instantaneous forward voltage @5.0A	V_F	1.2						V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	10.0 100.0						μA
Typical junction capacitance (Note1)	C_J	80						pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	15						$^\circ C/W$
Operating junction temperature range	T_J	- 55 ---- +150						$^\circ C$
Storage temperature range	T_{STG}	- 55 ---- +150						$^\circ C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Thermal resistance from junction to ambient.

FIG.1 – FORWARD DERATING CURVE

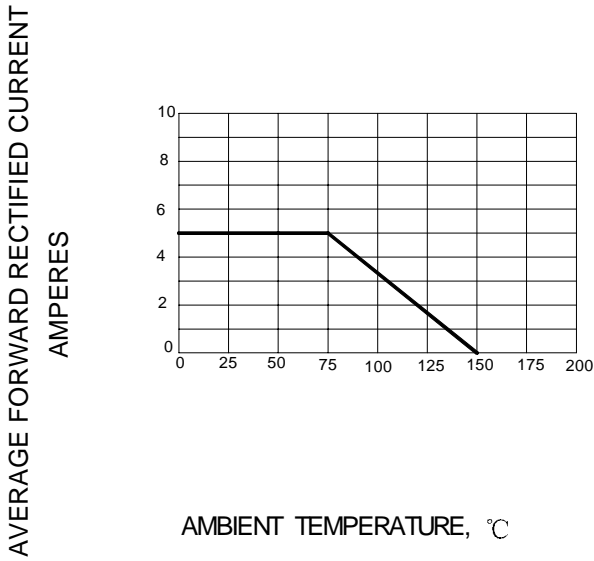


FIG.2 – TYPICAL FORWARD CHARACTERISTICS

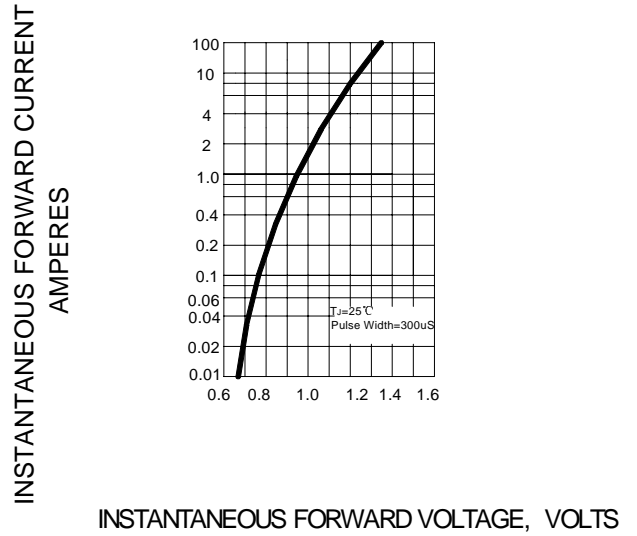


FIG.3 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

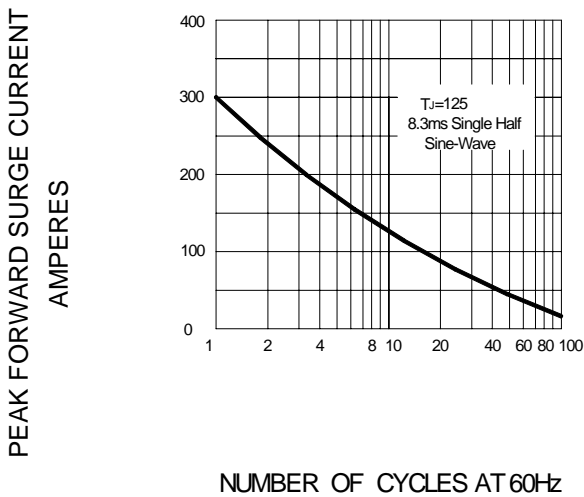


FIG.4 – TYPICAL JUNCTION CAPACITANCE

